


**Material**  
**Housing:** PA66, UL94V-0  
**Cage:** Brass, Ni plated  
**Screws:** M3.0, Steel, Zn plated  
**Clamp:** Phosphor bronze, Ni plated


**Electrical**  
**Rated voltage:** 300V  
**Rated current:** 15A  
**Contact Resistance:** 20 m Ω  
**Insulation resistance:** 500MΩ/DC500V  
**Withstand voltage:** AC2000V / 1 min  
**Wire Range:** 22 ~ 12AWG 2.5mm<sup>2</sup>

**Mechanical**  
**Temp. Range:** -40 °C ~ +105 °C  
**Strip length:** 7 ~ 8mm  
**Torque:** 0.5Nm(4.5Lbin)

**Order Information**

RE - C - EDDK - 5.00 - XXP - 4 S 00  
 RoHS  
 Terminal Block  
 Pitch  
 No.: of Pole  
 Color: 4- Green  
 Screw: S-Slot Screw C-Cross Screw  
 Product Code: 00 ~ 99

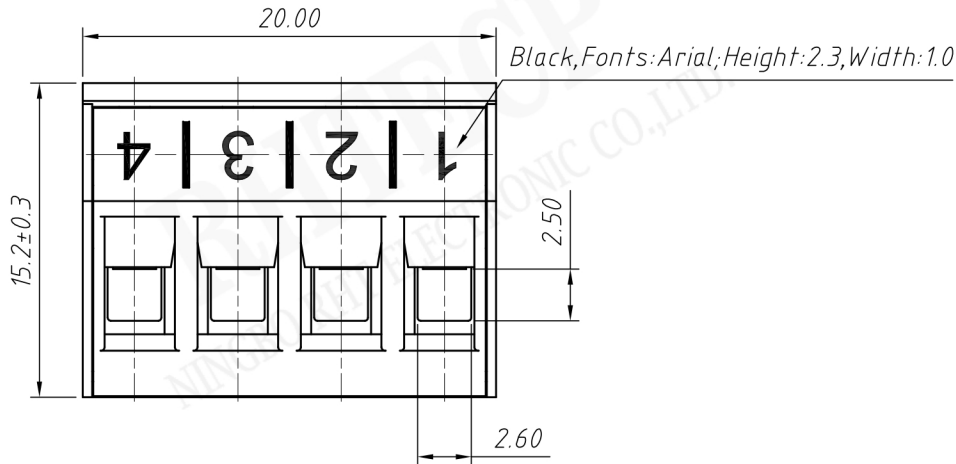

UNITS:mm	SHEET SIZE:A4		SCALE: ---	 First angle projection
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120	
± 0.12	± 0.15	± 0.3	± 0.5	<b>TERMINAL BLOCK</b>