

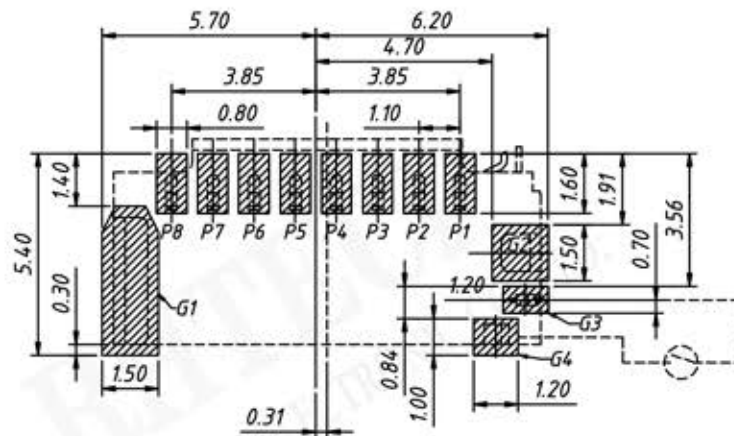
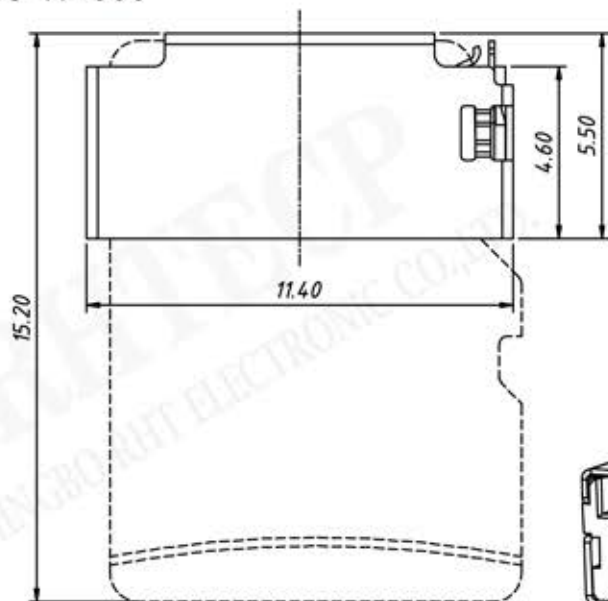
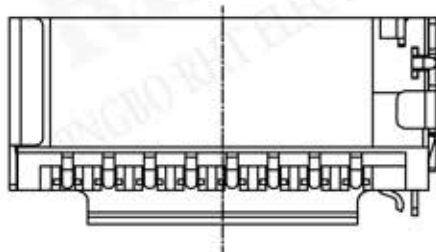


P/N: RE-C-TF-006



RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE  $\pm 0.05$

NORMAL OPEN SWITCH  
FOR CARD DETECT

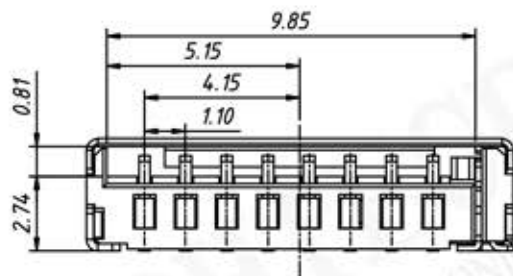

**Material:**

Housing: Thermoplastic, UL 94 V-0, Natural.

Terminal: Copper Alloy, Au Plating, Contact Area: G/F; Matte Tin Plated On Soldering.

Shell: Stainless Steel.

**Electrical:**

Contact Resistance:  $80m\Omega$  Max.

Insulation Resistance:  $100M\Omega$  Min.

Dielectric Withstanding Voltage: 500V AC.

Mechanical Characteristics Retention Force: Min. 100gf/Pin.