


P/N:RE-C-AS-302-1

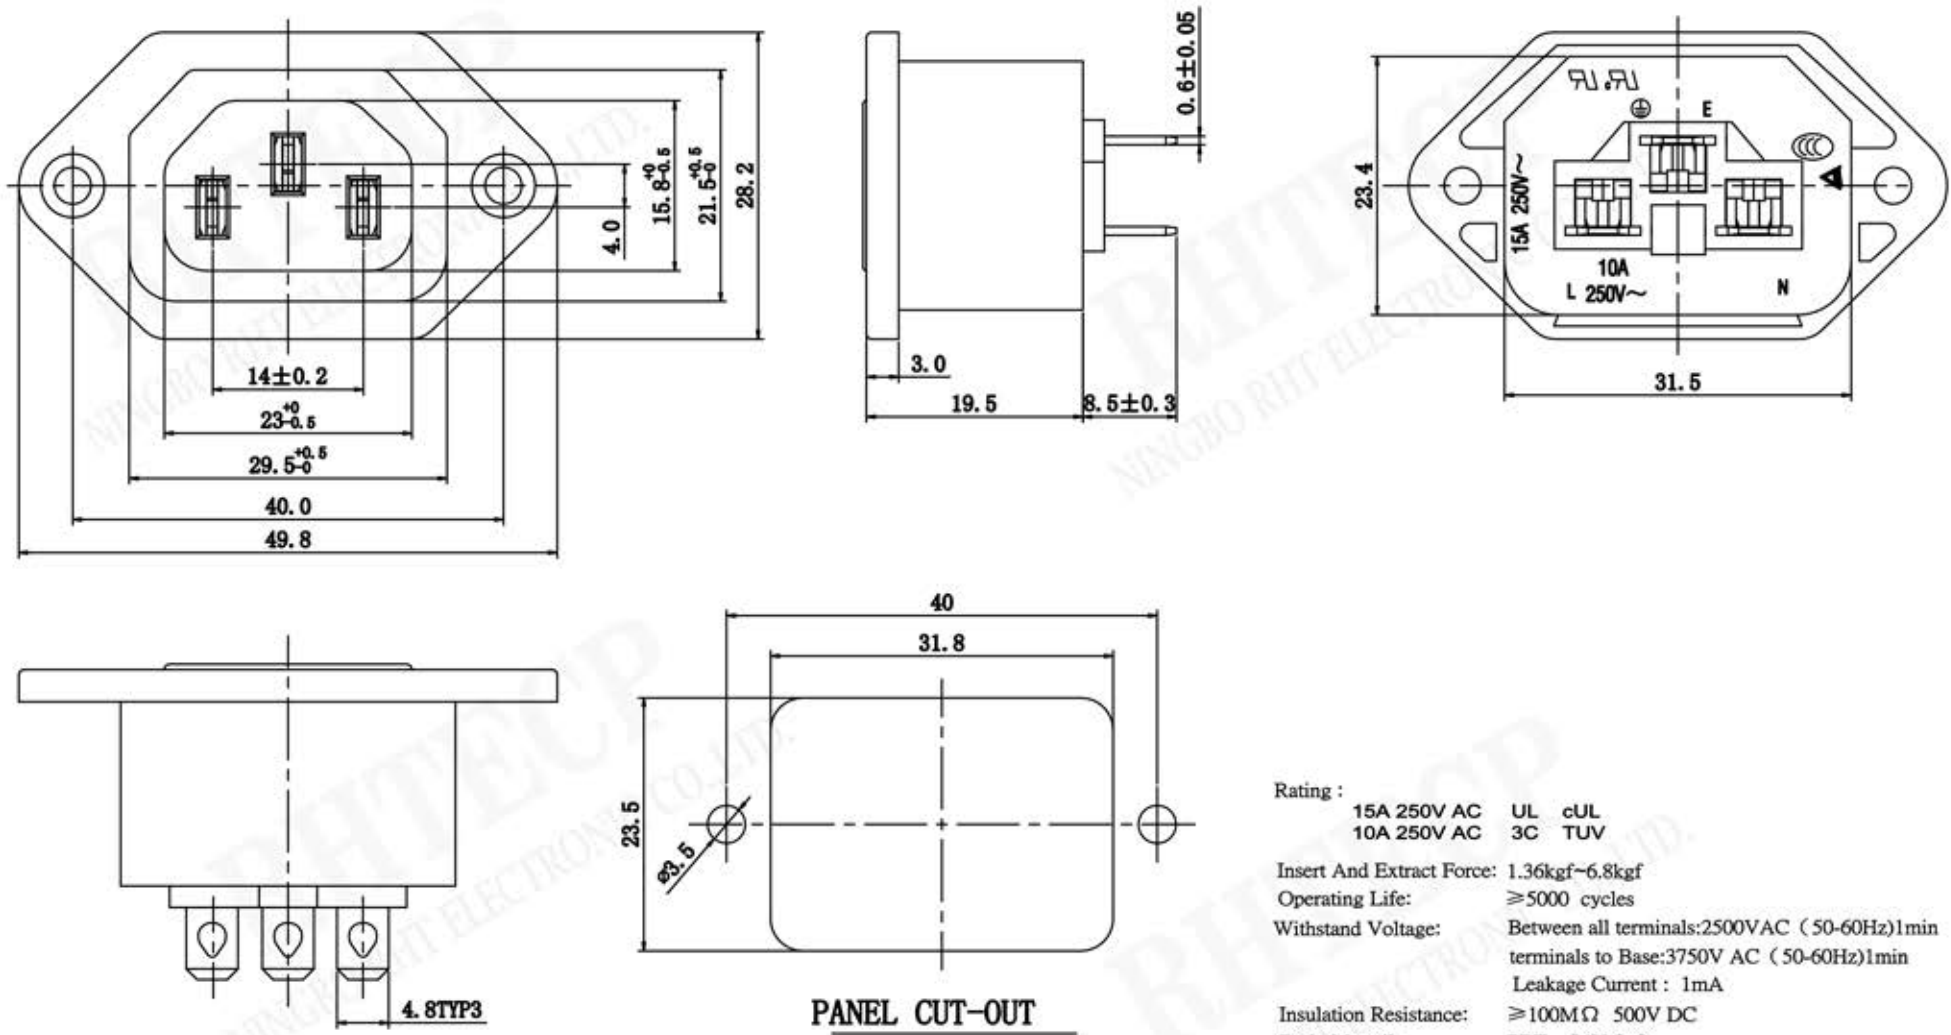

Rating :
 15A 250V AC UL cUL
 10A 250V AC 3C TUV

Insert And Extract Force: 1.36kgf~6.8kgf
 Operating Life: ≥5000 cycles
 Withstand Voltage: Between all terminals:2500VAC (50-60Hz)1min
 terminals to Base:3750V AC (50-60Hz)1min
 Leakage Current : 1mA

Insulation Resistance: ≥100MΩ 500V DC
 Body Materil: PBT 94V-2-0

UNITS:mm	SHEET SIZE:A4		SCALE: ---
> 0~ 3	> 3~ 18	> 18~ 50	> 50~ 120
± 0.12	± 0.15	± 0.3	± 0.5