

PCB LAYOUT

Material

Housing: PA66.UL 94V-0

Cage: Iron, Ni plated

Pin Header: Iron 0.8T, Tin plated

Screw: M2.5.steel Zn plated

Electrical

Rated voltage: 300V

Rated current: 10A

Contact Resistance: 20mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

Wire Range: 24~12AWG 2.5mm²


Mechanical

Temp. Range: -40°C~+105°C

Strip length: 6~7mm

Torque: 0.4Nm (3.6Lb.in)

Order Information

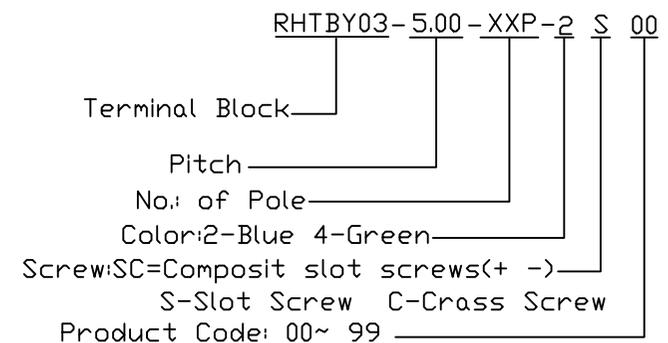

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Screw Conn Term Block 5.00mm	
THIRD ANGLE PROJECTION	RHTBY03-5.00-XXP-2S

