

Material

Screw: M4.0, steel, Zn plated
Cage: Brass, Nickel plated
Pin header: Brass, Tin plated
Housing: PA66, UL94V-0, Green

Electrical

Rated voltage: 300V
Rated current: 60A
Wire Range: 20~6AWG 10mm²
Contact Resistance: 20mΩ
Insulation resistance: 500MΩ/DC1000V
Withstand voltage: AC2500V/1min



Mechanical

Temp. Range: -40℃~+105℃
Soldering: 250℃ 5Sec. Max
Torque: 1.2Nm (10.5Lb.) in
Strip length: 9~10mm

Order Information

RHTBY16-10.16-XXP-4SXX

Terminal Block —
Pitch —
No. of Pole —
Color: 4-Green —
Screw: S-Slot Screw —
Product Code: 00~99 —

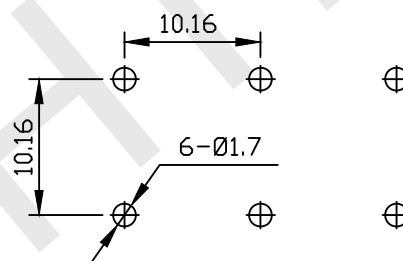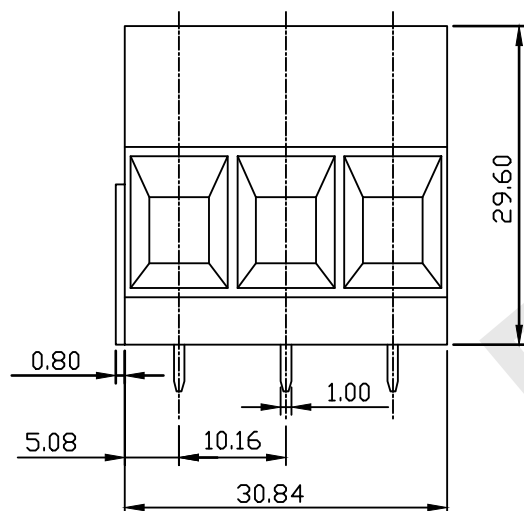

PCB LAYOUT



NINGBO RHT ELECTRONIC CO., LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Screw CONN TERM BLOCK 10.16 MM

THIRD ANGLE PROJECTION



RETBY16-1016-XXP-4S