

Material  
 Housing: PA66,UL94V-0  
 Pin Header: Brass, Tin plated  
 Clamp: Brass, Ni plated  
 Screw: M2.5,steel Zinc plated



Electrical  
 Rated voltage: 300V  
 Rated current: 16A  
 Contact Resistance: 20mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC2000V/1min  
 Wire Range: 26~12AWG 2.5mm<sup>2</sup>

Mechanical  
 Temp.Range: -40℃~+105℃  
 Strip length: 6~7mm  
 Torque: 0.4Nm(3.5Lb.in)

Order Information

RHTBY28R -5.00-XXP-4 S 00

Terminal Block  
 Pitch  
 No: of Pole  
 Color: 4-Green  
 Screw: S-Slot Screw  
 Product Code: 00~99

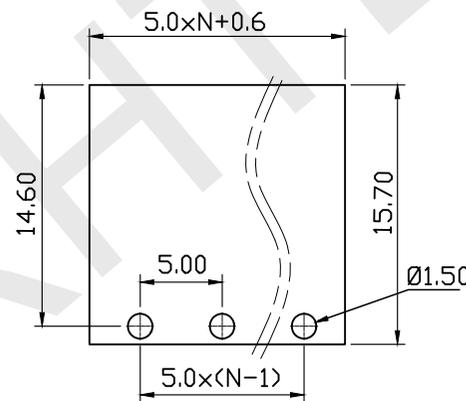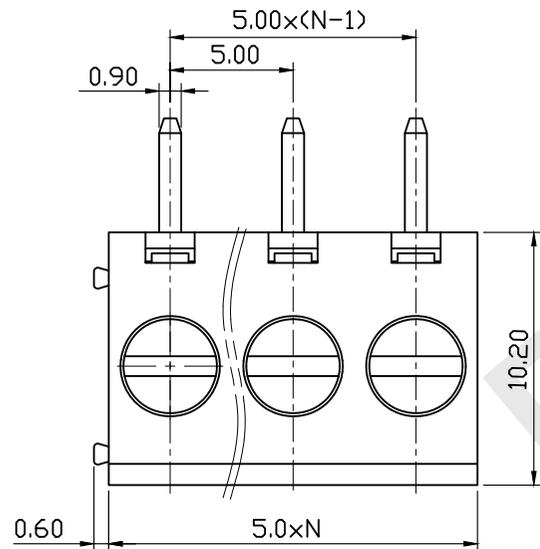

PCB LAYOUT

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Screw CONN TERM Block 5.00mm	
THIRD ANGLE PROJECTION	RHYBY28R-5.00-XXP-4S



NINGBO RHT ELECTRONIC CO.,LTD