

Material

Screw: M2.6, steel Nickel plated
 Wire guard: Beryllium Copper, Tin Plated
 Contact: Brass(CuZn), Nickel plated
 Housing: Polyamide Glass Filled UL94V-0


Electrical

Rated voltage: 250V
 Rated current: 10A
 Wire range: 22~14AWG 1.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 5000MΩ/DC1000V
 Withstand voltage: AC1500V/1Min

Mechanical

Temp. Range: -40°C~+105°C
 Torque: 0.4 N.m (3.5Lb. in)
 Strip length: 6mm

Order Information

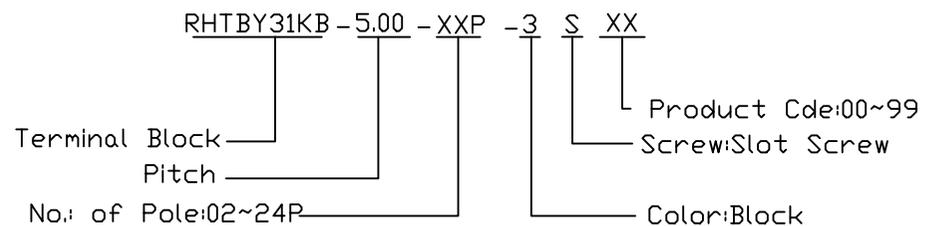

NINGBO RHT ELECTRONIC CO.,LTD

| | | | | | |
|----------|----------------|-------|--------|---------------|----------------------------|
| UNITS:mm | SHEET SIZE: A4 | | | SCALE:--- | DRWN BY PAN |
| 0~3 | 3~18 | 18~50 | 50~120 | CHK'D BY FENG | THIRD ANGLE PROJECTION |
| ±0.12 | ±0.15 | ±0.3 | ±0.5 | APPR BY ZHAN | |

Screw Conn Term Block 5.00mm

RHTBY31K-5.00-XXP-3S