
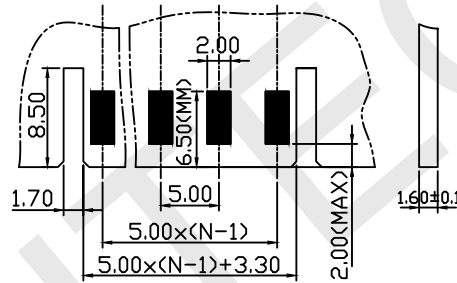


Material
 Housing:PA66,UL94V-0
 Screws:M3 Steel,Zn plated
 Cage:Brass ,Zn plated
 Clamp:Phosphor bronze, Ni Plated

Electrical
 Rated voltage:300V
 Rated current:10A
 Contact Resistance:20 mΩ
 Insulation resistance:5000MΩ/DC1000V
 Wire range:28-14 AWG 2.5mm²
 Withstand voltage:AC2000V/1min

Mechanical
 Torque:0.5NM(4.5Lb.in)
 Steip length:7-8mm
 Temp.Range:-40℃~+105℃




PCB LAYOUT

Order Information

RHTBYDKP-5.00-XXP-4S00
 Terminal Block
 Pitch
 No. of Pole
 Color: 4-Green
 Screw: S-Slot Screw C-Cross Screw
 Product Code: 00~99

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	Pluggable Terminal Block 5.00MM	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTBYDKP-5.00-XXP-4S-00



RHTBYDKP-5.00-XXP-4S-00