

Material

Housing:PA66,UL94V-0

Pin header:Brass, Tin plated

Electrical

Rated voltage:300V

Rated current:8A



Contact Resistance:20mΩ

Insulation resistance:500MΩ/DC500V


Withstand voltageAC2000V/1min

Mechanical

Temp.Range:-40℃~+ 105℃

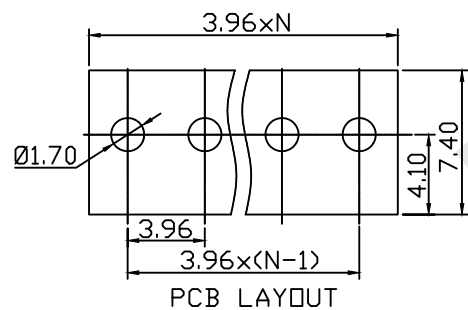

Order Information

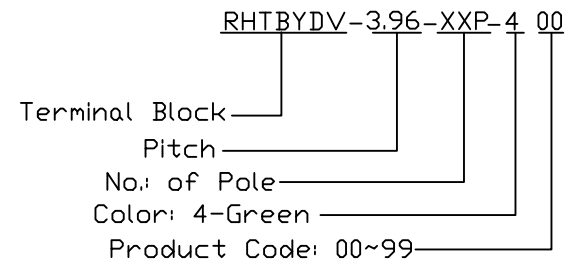

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 3.96MM	
THIRD ANGLE PROJECTION	RHTBYDV-3.96-XXP-4-00