

Material
 Housing:PA66, UL94V-0
 Pin header:Brass, Tin plated
 Nut:M2.5 Brass

Electrical
 Rated voltage:300V
 Rated current:15A

Contact Resistance:20 mΩ
 Insulation resistance:500MΩ/DC500V
 Withstand voltage:AC2000V/1min


Mechanical
 Temp. Range:-40°C~+ 105°C




Order Information

RHTBYDVC-7.50-XXP-4 00
 Terminal Block
 Pitch
 No. of Pole
 Color: 4-Green
 Product Code: 00~99

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 7.50MM
 THIRD ANGLE PROJECTION
 RHTBYDDV-7.50-XXP-4-00

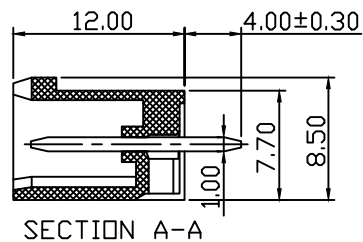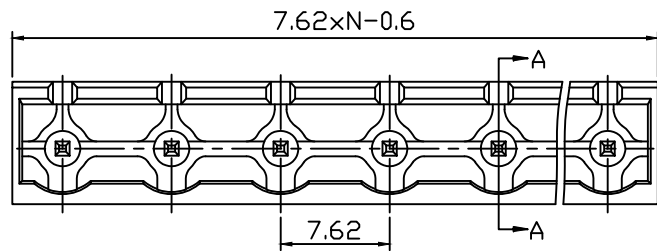

Material
 Housing:PA66, UL94V-0
 Pin header:Brass, Tin plated
 Nut:M2.5 Brass

Electrical
 Rated voltage:300V
 Rated current:15A

Contact Resistance:20 mΩ
 Insulation resistance:500MΩ/DC500V
 Withstand voltage:AC2000V/1min


Mechanical
 Temp. Range:-40°C~+ 105°C

Order Information

RHTBYDVC-7.62-XXP-4 00
 Terminal Block
 Pitch
 No. of Pole
 Color: 4-Green
 Product Code: 00~99

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 7.62MM
 THIRD ANGLE PROJECTION
 RHTBYDDV-7.62-XXP-4-00