



1 2 3 4 5 6 7 8 9

A

A

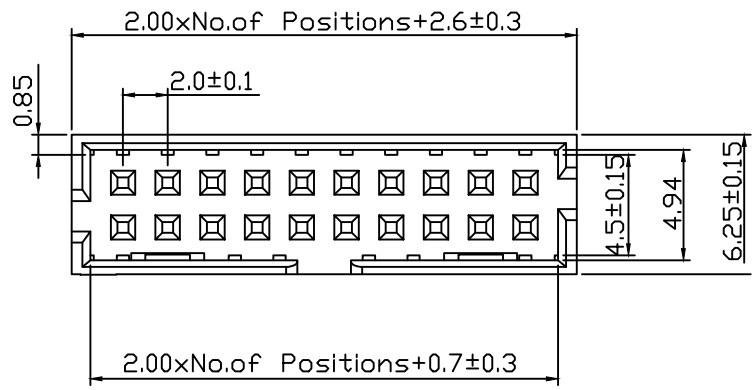

Material:  
Housing: PA6T,UL94V-0  
Contact: Brass  
Plating: Au or Sn Over Ni

Electrical Characteristics:  
Rated Current: 1.5AMP  
Contact Resistance: 20MΩ Max  
Withstand Voltage: 400V AC/DC  
Insulator Resistance: 800MΩ Min

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

Mechanical  
Operating Temperature: -40°C~+105°C  
Max.Processing Temp: 230°C For 30-60 Seconds (260°C For 10 Seconds)

B




B

C

C

D

D

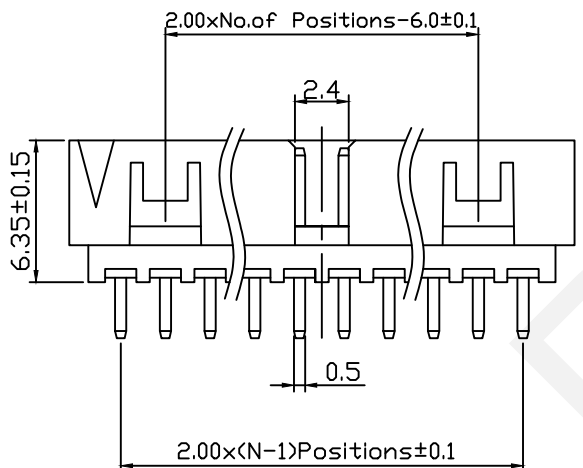

Type For 6~12 Pin

Order Information:  
RHTAY02H - XX - S - B - □  
Box Header Series  
02H: 2.00mm Pitch  
XX - No. of 06~64 pins  
Type: S - Straight pin  
R - Right Angle Pin T - SMT  
Color: B - Black G - Gray  
Material: NONE = PA6T  
A = PBT C = LCP

E

E

F

F

G

G




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2.00mm Pitch Box Header Connector

THIRD ANGLE PROJECTION





RHTAY02H-XX-S-B-□

1 2 3 4 5 6 7 8 9

1 2 3 4 5 6 7 8 9

A

A

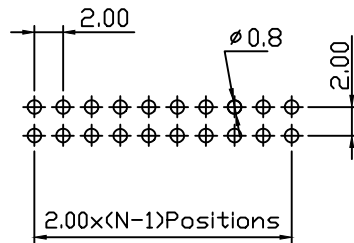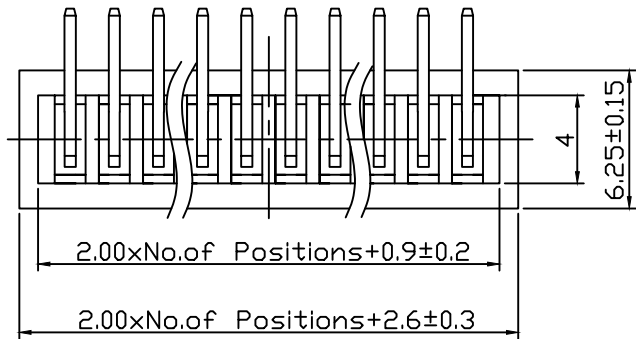

Material:  
Housing: PA6T,UL94V-0  
Contact: Brass  
Plating: Au or Sn Over Ni


Electrical Characteristics:  
Rated Current: 1.5AMP  
Contact Resistance: 20MΩ Max  
Withstand Voltage: 400V AC/DC  
Insulator Resistance: 800MΩ Min

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

Mechanical  
Operating Temperature: -40°C~+105°C  
Max.Processing Temp: 230°C For 30-60  
Seconds (260°C For 10 Seconds)

D

D

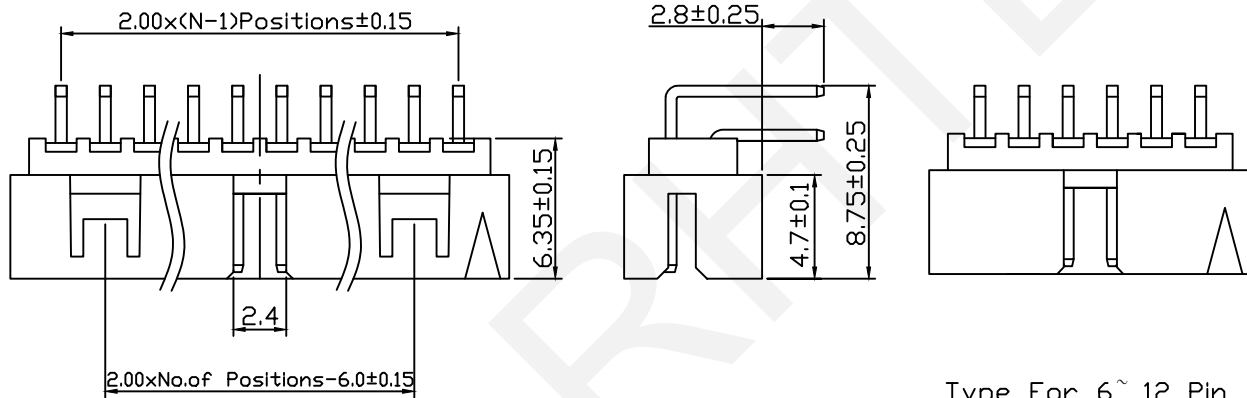

Type For 6~12 Pin

Order Information:

RHTAY02H-XX-R-B-□  
Box Header Series  
02H: 2.00mm Pitch  
XX-No. of 06~64 pins  
Type: S-Straight pin  
R-Right Angle Pin T-SMT  
Color: B-Black G-Gray  
Material: NONE=PA6T  
A=PBT C=LCP

F

F

G

G




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	


2.00mm Pitch Box Header Connector

THIRD ANGLE PROJECTION






RHTAY02H-XX-R-B-□


1 2 3 4 5 6 7 8 9

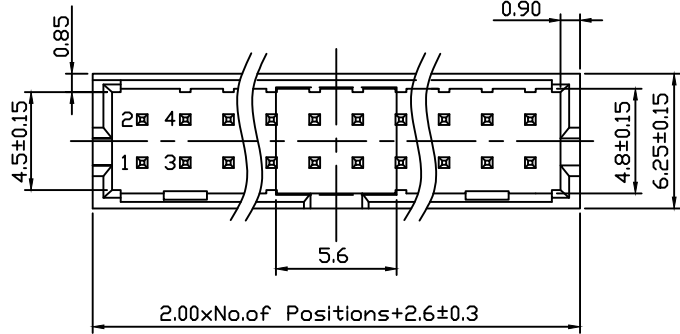

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

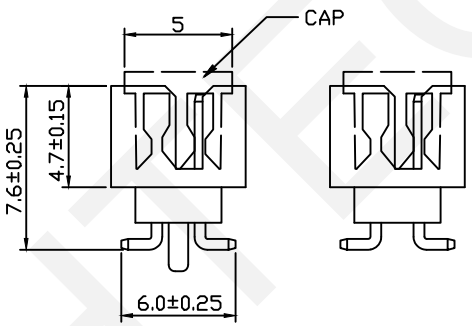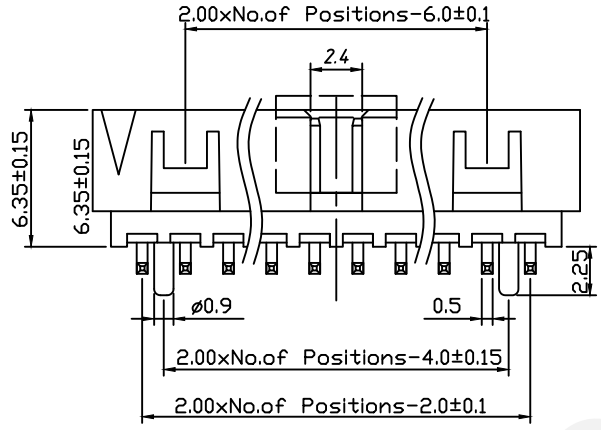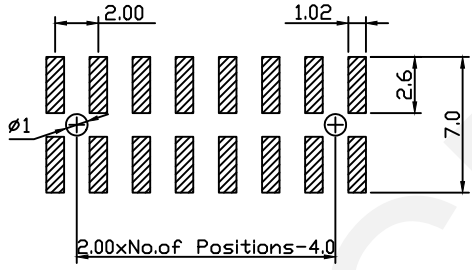

T3=With Post      T=Without Post



Material:  
Housing: PA6T,UL94V-0  
Contact: Brass  
Plating: Au or Sn Over Ni

Electrical Characteristics:  
Rated Current: 1.5AMP  
Contact Resistance: 20MΩ Max  
Withstand Voltage: 400V AC/DC  
Insulator Resistance: 800MΩ Min

Mechanical  
Operating Temperature: -40°C~+105°C  
Max.Processing Temp: 230°C For 30-60  
Seconds (260°C For 10 Seconds)

Order Information:  
RHTAY02H - XX - T - B - □ - T  
Box Header Series  
02H: 2.00mm Pitch  
XX - No. of 06~64 pins  
SMT: T=Without Post  
T3=With Post  
Color: B-Black G-Gray  
Material: NONE=PA6T  
A=PBT C=LCP  
Packing: \_\_\_\_\_  
T=Tube P=Tube+Cap R=Reel+Cap



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

2.00mm Pitch Box Header Connector  
THIRD ANGLE PROJECTION  
RHTAY02H-XX-T-B-□-T