

PCB LAYOUT

Material
Housing:PA66.UL94V-0
Pin header: Brass , Tin plated
Wire guard: Stainless steel



Electrical
Rated voltage:300V
Rated current:10A
Wire range:26~14AWG 1.5mm²
Contact Resistance: 20 mΩ
Insulation resistance:500MΩ/DC500V
Withstand voltage:AL2000V/1min

Mechanical
Temp.Range:-40℃~+105℃
Soldering:250℃+5℃ for 5S
Strip length:5~6 mm

Order Information

RHTBY06- 7.50-XXP-1 XX

Terminal Block _____
Pitch _____
No. of Pole _____
Color: 1-Gray _____
5-Orange _____
Product Code: 00~99 _____

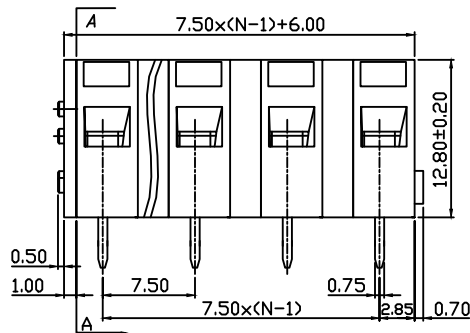


SECTION A-A

 NINGBO RHT ELECTRONIC CO.,LTD

| | | | |
|----------|----------------|-----------|---------------|
| UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN |
| 0~3 | 3~18 | 18~50 | 50~120 |
| ±0.12 | ±0.15 | ±0.3 | ±0.5 |
| | | | CHK'D BY FENG |
| | | | APPR BY ZHAN |

Spring Clamp Terminal Block

THIRD ANGLE PROJECTION


RHTBY06-7.50-XXP-1