



PCB Layout

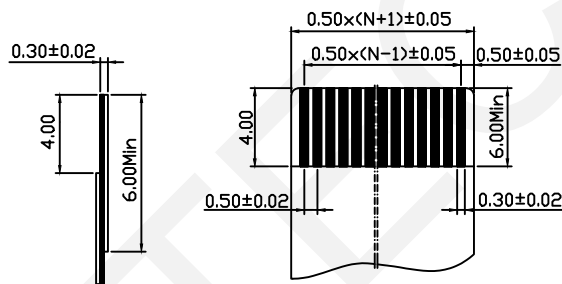

Proper Cable

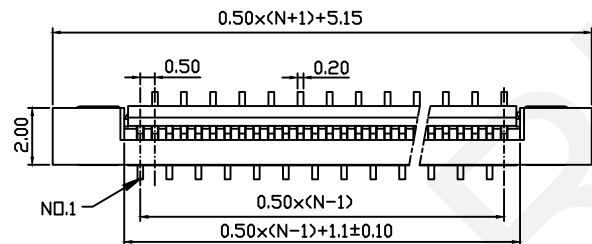

Material
 Housing:LCP UL94V-0
 Terminal:Phosphor Bronze Tin-Plated
 Fitting Nial:Phosphor Bronze Tin-Plated

Electrical
 Voltage Rating: 50 V
 Current Rating: 0.4 A
 Withstanding Voltage:200 V
 Insulation Resistance: 500MΩ.Min.
 Contact Resistance: 20mΩ.Max.

Mechanical
 Temp.Range:-25℃~+85℃

Order Information
 RHTAY242E-4.8-XX-LT-P-R

Series No. |
 Height:4.8mm |
 No.of Pins |
 (04~60 Pins)
 LT-Vertical SMT Pin
 P-Positive Needle
 Pack: T-Tube R-Reel

Material
 Housing:LCP UL94V-0
 Terminal:Phosphor Bronze Tin-Plated
 Fitting Nial:Phosphor Bronze Tin-Plated




Electrical
 Voltage Rating: 50 V
 Current Rating: 0.4 A
 Withstanding Voltage:200 V
 Insulation Resistance: 500M Ω .Min.
 Contact Resistance: 20m Ω .Max.

Mechanical
 Temp.Range:-25 $^{\circ}$ C~+85 $^{\circ}$ C


Order Information

RHTAY242E-4.8-XX-LT-A-R


Series No. _____
 Height:4.8mm _____
 No.of Pins _____
 (04~60 Pins)
 LT-Vertical SMT Pin _____
 A-Anti-Needle _____
 Pack: T-Tube R-Reel _____

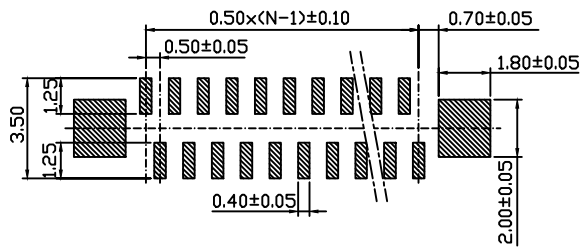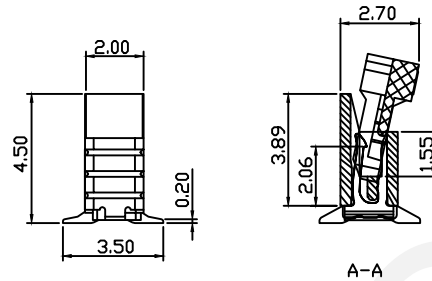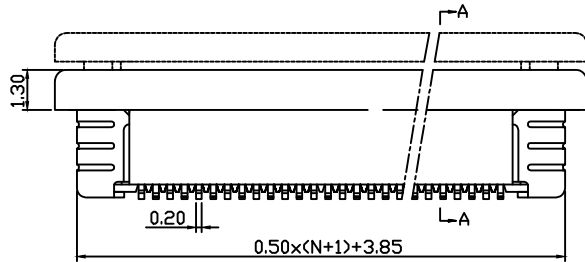

PCB Layout

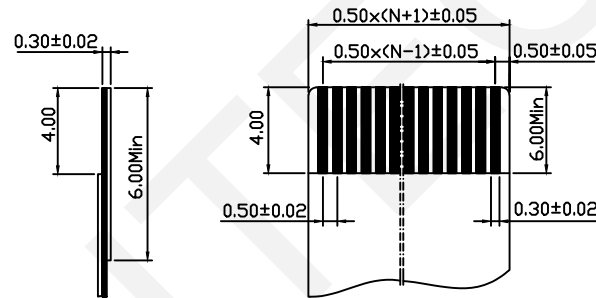

Proper Cable

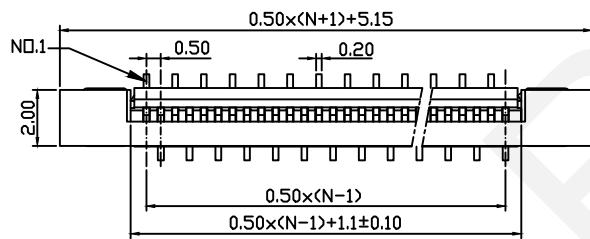

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
± 0.12	± 0.15	± 0.3	± 0.5	APPR BY ZHAN	

CONN FFC 0.50mm,SMD,Vertical ,With ZIF
 THIRD ANGLE PROJECTION
 RHTAY242E-4.8-XX-LT-A-X