
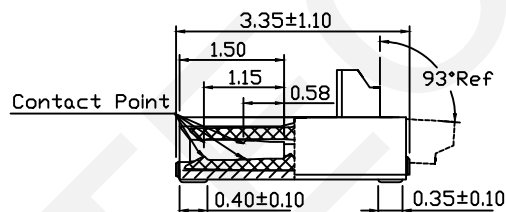


Material
 Housing: Thermoplastic UL94V-0
 Cover: Thermoplastic UL94V-0
 Terminal: Phosphor Bronze
 Stator: Phosphor Bronze

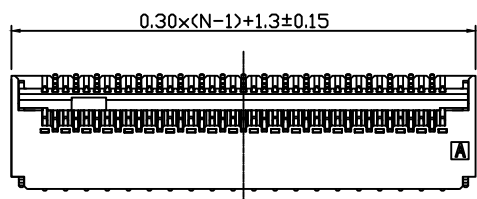


Electrical
 Voltage Rating(Max.): 30V
 Current Rating(Max.): 0.2A

Mechanical
 Temp. Range: -55°C~+85°C

SECTION: A-A
 SCALE 2:1

Order Information
 RHTAY244G-0.9-XX-R

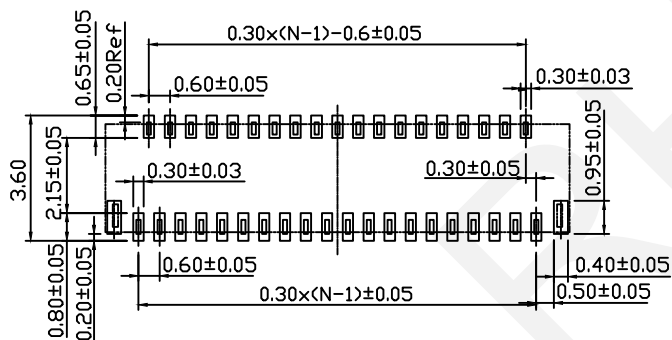

Recommended PCB Layout

Series No. _____
 Height: 0.9mm _____
 No. of Pins _____
 (09~61 Pins)
 Packing: R-Reel _____

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 0.30mm,SMD,Horizontal,With ZIF	
THIRD ANGLE PROJECTION	RHTAY244G-0.9-XX-R