

Material



Housing: LCP UL94V-0
 Actuator: LCP UL94V-0
 Contacts: Copper Alloy
 PEG: Copper Alloy
 Contacts: Tin Over Nickel
 PEG Plating: Tin Over Nickel

Electrical

Voltage Rating: 50V
 Current Rating: 0.3A

Mechanical


Temp. Range: -25°C ~ +85°C

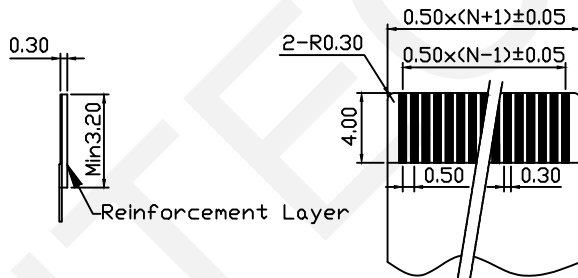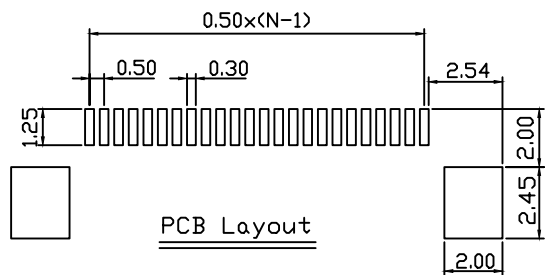

Order Information

RHTAY42D-1.2-XX-T-U-R

Series No.
 Height: 1.2mm
 No. of Pins
 (04~35 Pins)
 T-SMT Pin
 U-Upper Contact
 Pack: T-Tube R-Reel

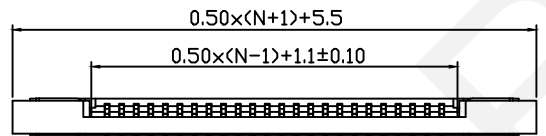








RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 0.50mm,SMD,
 Horizontal, Upper Contact ,With ZIF

THIRD ANGLE PROJECTION

RHTAY42D-1.2-XX-T-U-R

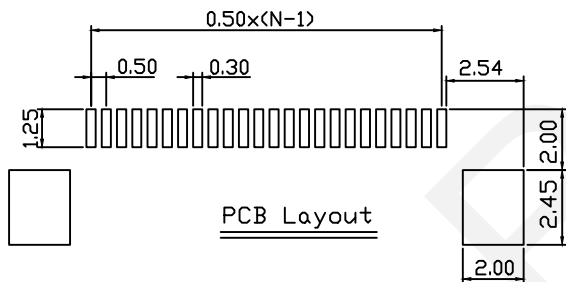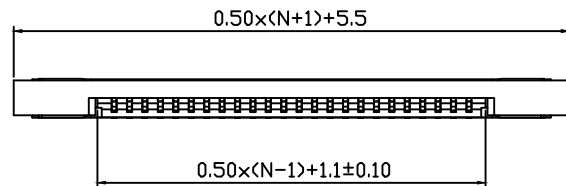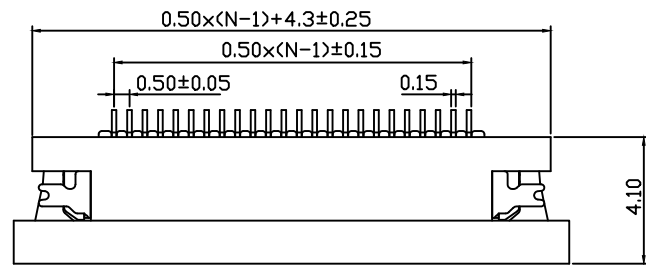

Recommended FPC Dimension

Material
 Housing:LCP UL94V-0
 Actuator:LCP UL94V-0
 Contacts:Copper Alloy
 PEG:Copper Alloy
 Contacts: Tin Over Nickel
 PEG Plating: Tin Over Nickel

Electrical
 Voltage Rating: 50V
 Current Rating: 0.3A


Mechanical
 Temp.Range:-25°C~+85°C

Order Information
 RHTAY42D-1.2-XX-T-L-R

Series No. |
 Height:1.2mm |
 No.of Pins |
 (04~35 Pins) |
 T-SMT Pin |
 L-Lower Contact |
 Pack: T-Tube R-Reel |

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:----	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 0.50mm,SMD,
 Horizontal, Lower Contact ,With ZIF
 THIRD ANGLE PROJECTION
 RHTAY42D-1.2-XX-T-L-R