
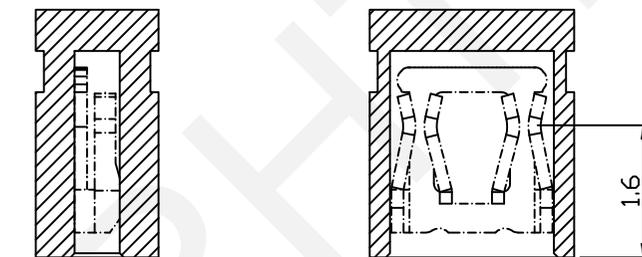



RoHS Compliant

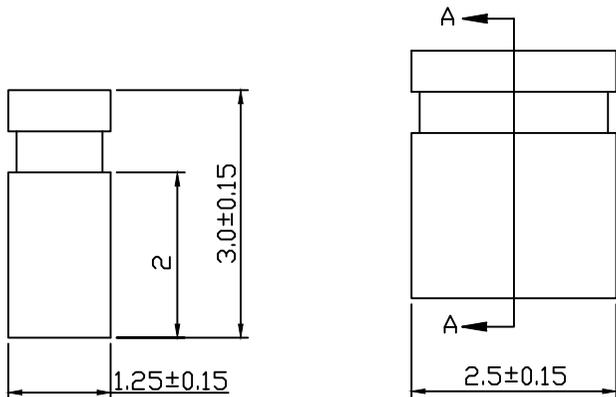

SECTION A-A

Material:
 Standard:PBT
 Contact:Phosphor Bronze
 Contact Plating: Au Over Ni
 Insulator: Polyester, UL94V-0
 Electrical Characteristics:
 Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulator Resistance: 1000MΩ Min
 Mechanical
 Operating Temperature: -40°C~+105°C
 Max.Processing Temp:180°C For 30-60 Seconds
 (200°C For 10 Seconds)

Order Information:

RHTAY03C-C-B-3.0

Pin Header Series
 03C:1.27mm
 Housing Type:
 C-Close
 Color:B-Black R-Red
 L-Blue G-Green
 Height:
 Close Type:3.0mm

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

1.27mm Pitch Mini Jumper Connector


THIRD ANGLE PROJECTION



RHTAY03C-C-B-3.0

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

RoHS Compliant

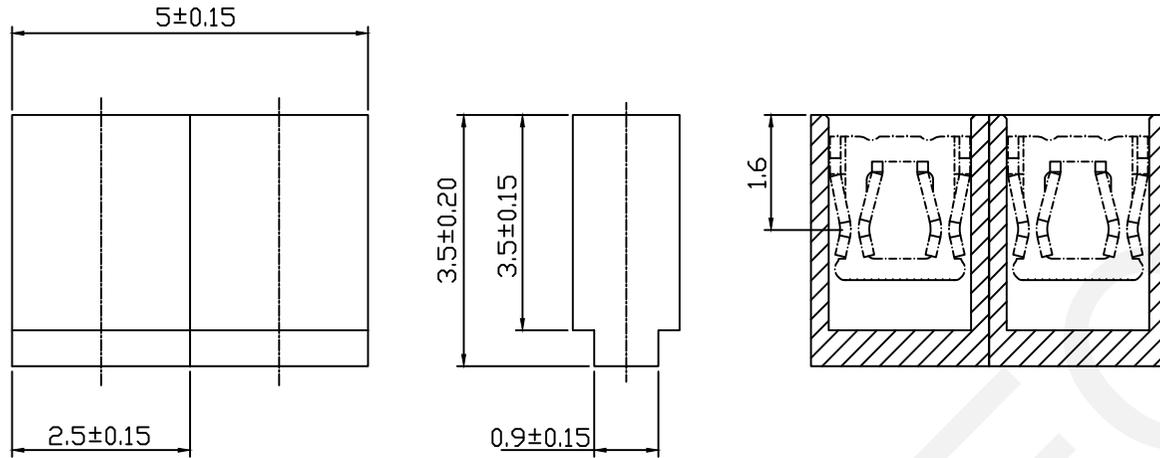

Material:

Standard: PBT/PA66

Contact: Phosphor Bronze

Contact Plating: Au Over Ni

Insulator: Polyester, UL94V-0

Electrical Characteristics:

Rated Current: 1.0AMP

Contact Resistance: $20 \text{m}\Omega$ Max



Withstand Voltage: 500V AC/DC

Insulator Resistance: $1000 \text{M}\Omega$ Min

Mechanical

Operating Temperature: $-40^\circ\text{C} \sim +105^\circ\text{C}$

Max. Processing Temp: 180°C For 30-60 Seconds
 $(200^\circ\text{C}$ For 10 Seconds)

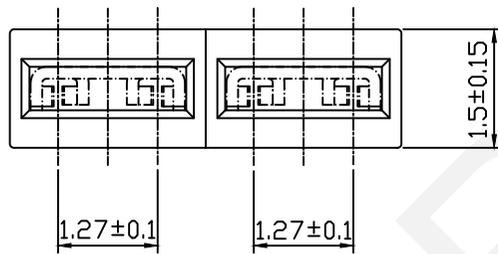

Order Information:

RHTAY03C-C-B-3.5

Pin Header Series

03C: 1.27mm

Housing Type: _____

C-Close

Color: B-Black R-Red

L-Blue G-Green

Height: _____

Close Type: 3.5mm

RHTECP NINGBO RHT ELECTRONIC CO.,LTD



UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION	
± 0.12	± 0.15	± 0.3	± 0.5	APPR BY ZHAN	RHTAY03C-C-B-3.5	

1.27mm Pitch Mini Jumper Connector



RHTAY03C-C-B-3.5

1
RoHS Compliant

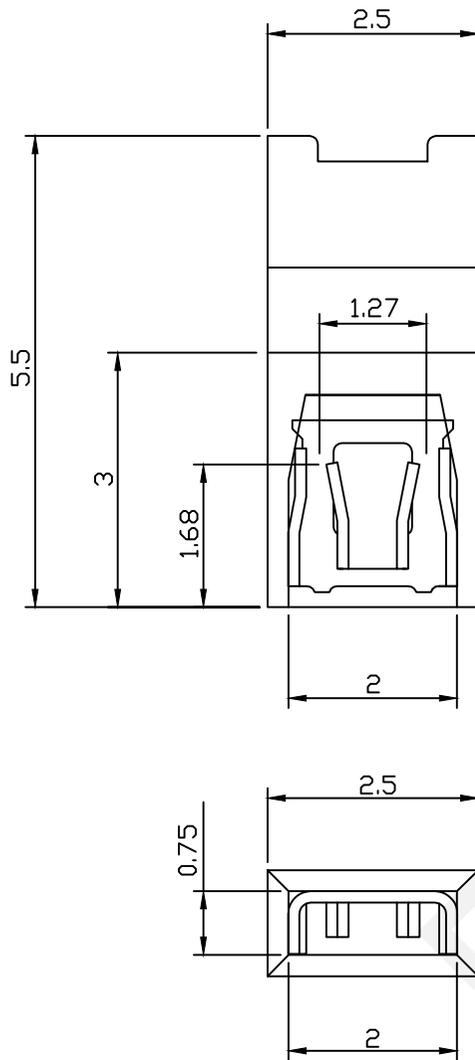

Material:
 Standard:PBT
 Contact:Phosphor Bronze
 Contact Plating:Au Over Ni
 Insulator:Polyester,UL94V-0
 Electrical Characteristics:
 Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulator Resistance: 1000MΩ Min
 Mechanical
 Operating Temperature: -40°C~+105°C
 Max.Processing Temp:180°C For 30-60 Seconds
 (200°C For 10 Seconds)

Order Information:

RHTAY03C-□-B-5.5

Pin Header Series

03C:1.27mm

Housing Type: _____

□-Open

Color:B-Black R-Red


L-Blue G-Green

Height: _____

Open Type:5.5mm

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

1.27mm Pitch Mini Jumper Connector
 THIRD ANGLE PROJECTION

 RHTAY03C-□-B-5.5

RHTECP NINGBO RHT ELECTRONIC CO.,LTD