
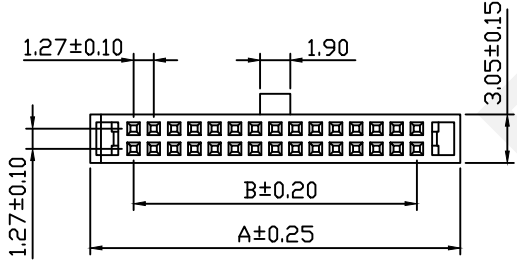


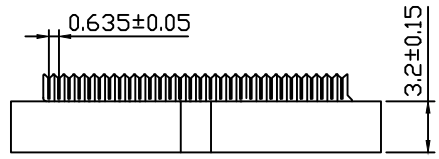
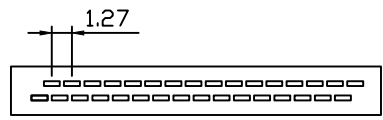


RoHS Compliance

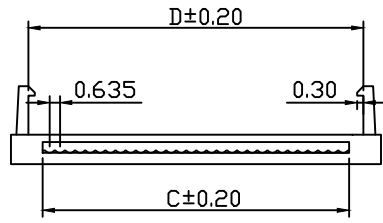

Pin	Dimension mm			
	A	B	C	D
06	8.00	2.54	4.20	5.30
08	9.27	3.81	5.47	6.57
10	10.54	5.08	6.74	7.84
12	11.81	6.35	8.01	9.11
14	13.08	7.62	9.28	10.38
16	14.35	8.89	10.55	11.65
18	15.62	10.16	11.82	12.92
20	16.89	11.43	13.09	14.19
24	19.43	13.97	15.63	16.73
26	20.70	15.24	16.90	18.00
30	23.24	17.78	19.44	20.54
34	25.78	20.32	21.98	23.08
40	29.59	24.13	25.79	26.89
44	32.13	26.67	28.33	29.43
50	35.94	30.48	32.14	33.24
60	42.29	36.83	38.49	39.59
64	44.43	39.37	41.03	42.13
68	47.37	41.91	43.57	44.67
80	54.99	49.53	51.19	52.29

Material:

Housing: PBT,UL94V-0

Contacts: Phosphor Bronze

Plating: Au Or Sn 50u" Over Ni

Electrical Characteristics:

Current Rating : 1.0AMP

Withstand Voltage: 500V AC

Insulator Resistance: 1000MΩ ohm Min

Contact Resistance: 20MΩ ohm Max

Operating Temperature:-40°C~+105°C

Max.Processing Temp:180°C For 30-60 Seconds (200°C For 10 Seconds)

Order Information:

RHTAY04C-XX-B

IDC Connectors

1.27mm Pitch

Cover Type: 5.00mm

XX-No.of 06~80Pin


Color:

B-Black G-Gray L-Blue

 NINGBO RHT ELECTRONIC CO.,LTD


UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

1.27mm Pitch IDC Connector

THIRD ANGLE PROJECTION 

RHTAY04C-XX-B

RoHS Compliance

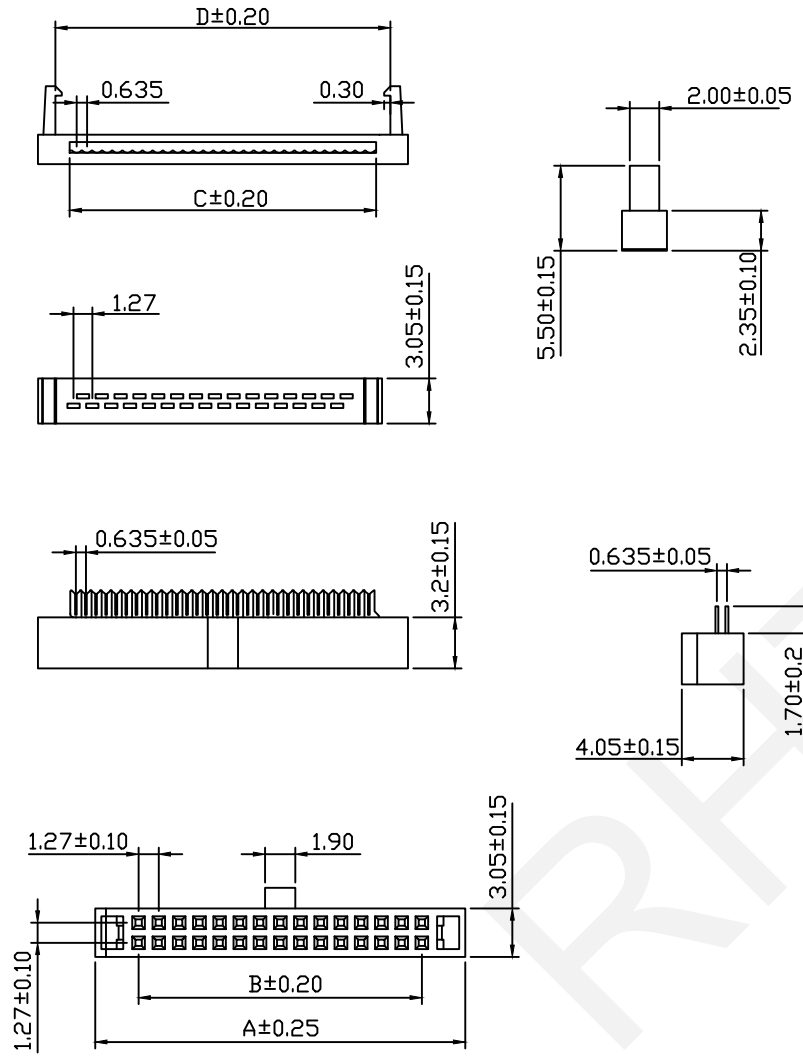

Pin	Dimension mm			
	A	B	C	D
06	8.00	2.54	4.20	5.30
08	9.27	3.81	5.47	6.57
10	10.54	5.08	6.74	7.84
12	11.81	6.35	8.01	9.11
14	13.08	7.62	9.28	10.38
16	14.35	8.89	10.55	11.65
18	15.62	10.16	11.82	12.92
20	16.89	11.43	13.09	14.19
24	19.43	13.97	15.63	16.73
26	20.70	15.24	16.90	18.00
30	23.24	17.78	19.44	20.54
34	25.78	20.32	21.98	23.08
40	29.59	24.13	25.79	26.89
44	32.13	26.67	28.33	29.43
50	35.94	30.48	32.14	33.24
60	42.29	36.83	38.49	39.59
64	44.43	39.37	41.03	42.13
68	47.37	41.91	43.57	44.67
80	54.99	49.53	51.19	52.29

Material:

Housing: PBT,UL94V-0

Contacts: Phosphor Bronze

Plating: Au Or Sn 50u" Over Ni

Electrical Characteristics:

Current Rating : 1.0AMP

Withstand Voltage: 500V AC

Insulator Resistance: 1000MΩ ohm Min

Contact Resistance: 20MΩ ohm Max

Operating Temperature:-40°C~+105°C

Max.Processing Temp:180°C For 30-60 Seconds (200°C For 10 Seconds)

Order Information:

RHTAY04CA-XX-B

IDC Connectors

1.27mm Pitch

Cover Type: 5.50mm

XX-No.of 06~80Pin

Color:


B-Black G-Gray L-Blue

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

1.27mm Pitch IDC Connector

THIRD ANGLE PROJECTION



RHTAY04CA-XX-B