
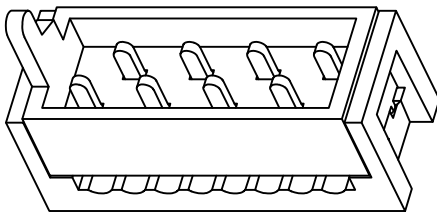
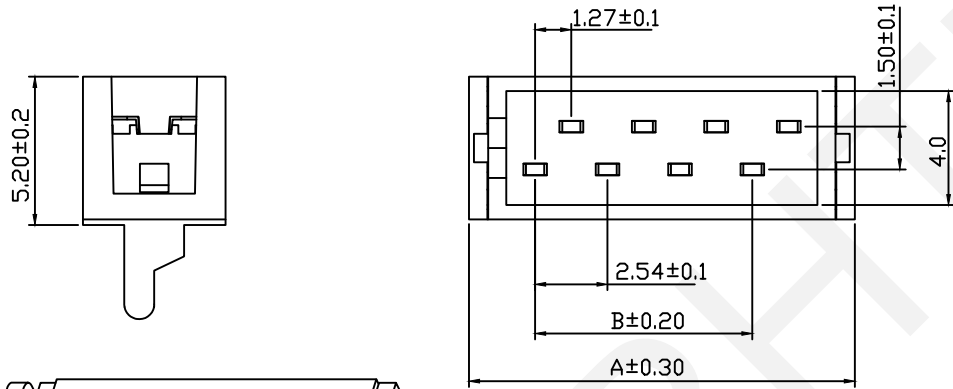


RoHS Compliance

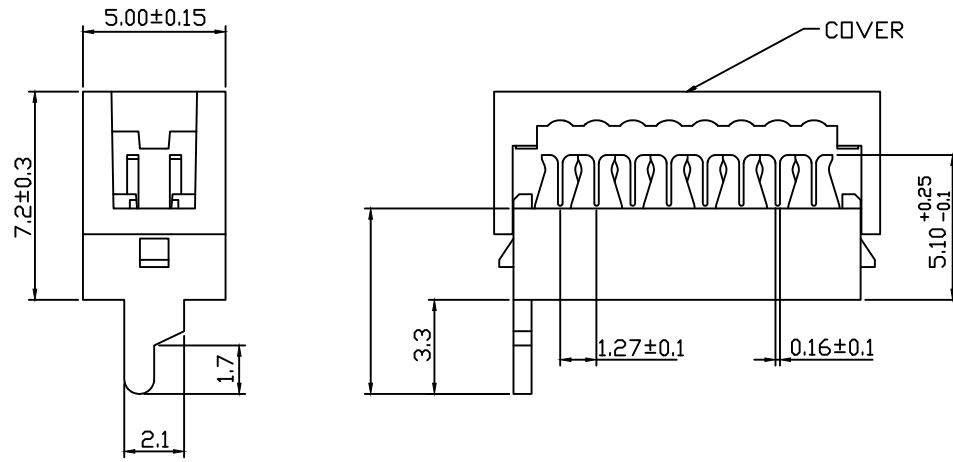

Poles	DIM.A	DIM.B	Qty/Tube
04	8.45	2.54	68
06	10.99	5.08	52
08	13.53	7.62	42
10	16.07	10.16	36
12	18.61	12.70	31
14	21.15	15.24	27
16	23.69	17.78	24
18	26.23	20.32	22
20	28.77	22.86	20
22	31.31	25.40	18
24	33.85	27.94	17
26	36.39	30.48	16

Material:
 Housing :PBT Glass Fiber,UL94V-0
 Contacts: Brass
 Plating: Sn Over Ni
 Electrical Characteristics:
 Current Rating : 1.0AMP
 Contact Resistance: 20MΩ ohm Max
 Insulator Resistance: 1000MΩ ohm Min
 Withstand Voltage: 500V AC
 Operating Temperature:-40°C~+105°C

Order Information:

RHTAY04E-XX-R-□-□

Pitch:2.54mm
 XX-No.of 04~26pin
 Color:R-Red B-Black
 Material: _____
 NONE=PBT E=PA46
 Packing: _____
 NONE=Tray T=Tube



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Micro Match Connector
 THIRD ANGLE PROJECTION
 RHTAY04E-XX-R-□-□