

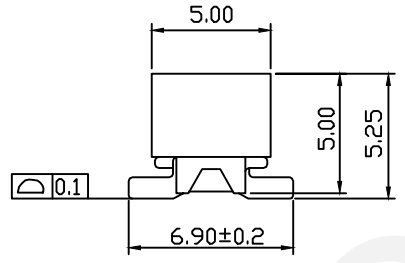
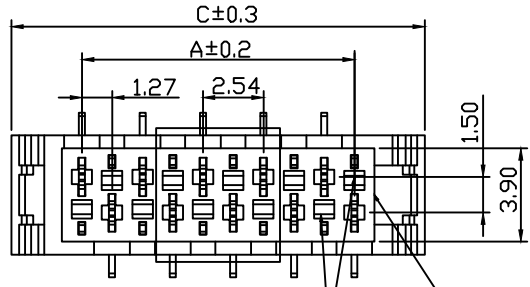
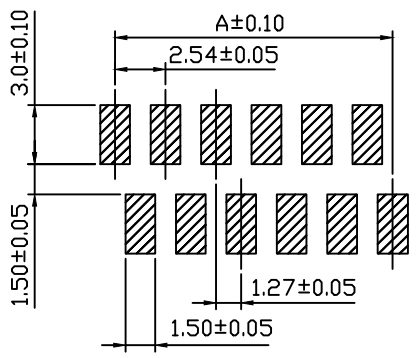


RoHS Compliance

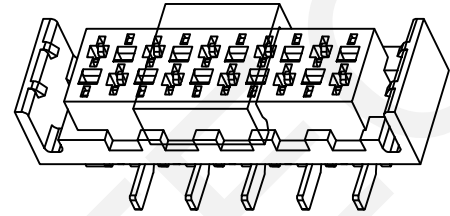

REFENCE MATING INTERFACE PATTERN:  
1.27 STAGGERED PITCHx15 ROW-DISTANCE

POLARISATION SOLT

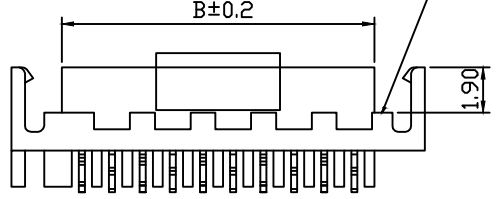

Recommended P.C.B Layout

Poles	DIM.A	DIM.B	DIM.C	Qty/Tube
04	3.81	5.50	9.71	59
06	6.35	8.04	12.25	47
08	8.89	10.58	14.79	39
10	11.43	13.12	17.33	33
12	13.97	15.66	19.87	29
14	16.51	18.20	22.41	25
16	19.05	20.74	24.95	23
18	21.59	23.28	27.49	21
20	24.13	25.82	30.03	19
22	26.67	28.36	32.57	17
24	29.21	30.90	35.11	16
26	31.75	33.44	37.65	15

Material:

Housing: PA46/PA9T UL94V-0

Contacts: Phosphor Bronze

Plating: Sn Over 50u" Nickel

Electrical Characteristics:

Current Rating : 1.0AMP

Voltage Rating: 230V AC/DC

Withstand Voltage: 500V AC/Minute

Contact Resistance: 20MΩ ohm Max

Insulator Resistance: 1000MΩ ohm Min

Operating Temperature:-40°C~+105°C

Order Information:

RHTAY04GD-XX-R-□-□

Pitch:2.54mm

XX-No.of 04~26pin

Color:R-Red B-Black

Material: \_\_\_\_\_

NONE=PA9T E=PA46

Packing: \_\_\_\_\_

TC=Cap+Tube C-R=Cap+Reel




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Micro Match Connector Female SMT With Ear

THIRD ANGLE PROJECTION



RHTAY04GD-XX-R-□-□