


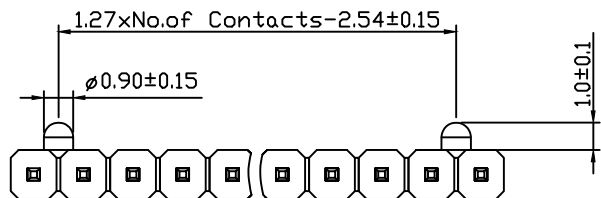



RoHS Compliance



N=W/O Post

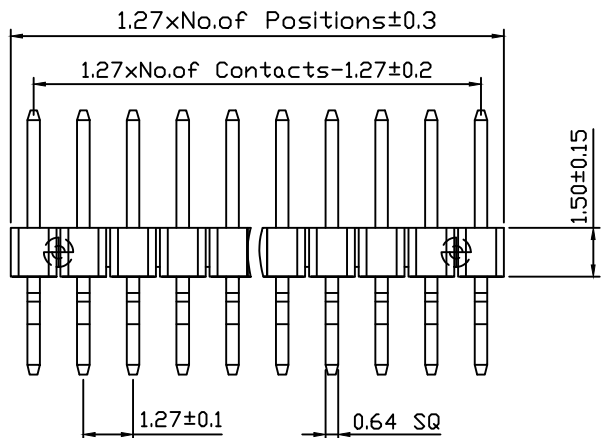

W=With Post

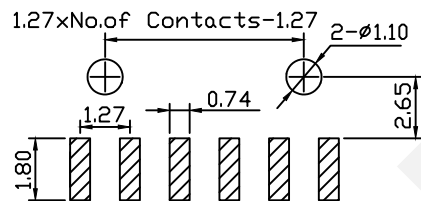

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

Dimension Antitheses List (mm)				
ITEM	PA	PB	PC	Plastic Height
Standard	2.90	1.00	2.40	1.50
Nonstandard	---	---	---	---

Material:  
Standard: PA6T  
Contact: Brass  
Insulator: Polyester,UL94V-0  
Electrical Characteristics:  
Rated Current: 1AMP  
Contact Resistance: 20mΩ Max  
Withstand Voltage: 500V AC/DC  
Insulator Resistance: 1000MΩ Min  
Mechanical  
Operating Temperature: -40°C~+105°C

Order Information:  
RHTAY07CA-1.50-1-XX-PAxPCxPB-G0-W-R



Pin Header Series  
07CA: 1.27mm  
Plastics Height:  
1.50, 2.00, 2.50 mm  
Per Row:Single Layer  
Pin: No. of Pins (1x40)  
Size:PAxPCxPB  
Plating:  
G0=Gold Flash G1=1u" Gold G10=10u" Gold  
G15=15u" Gold G30=30u" Gold  
Post:W=With Post N=W/O Post  
Packing:  
0=PE Bag A=Tray T=Tube  
P=Tube+Cap R=Reel+Cap

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD



UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

1.27mm Pin Header  
Single Layer,1xN Pin Horizontal SMT  
THIRD ANGLE PROJECTION  
 RHTAY07CA-1.50-1-XX-PAxPCxPB-G0-W-R

RoHS Compliance

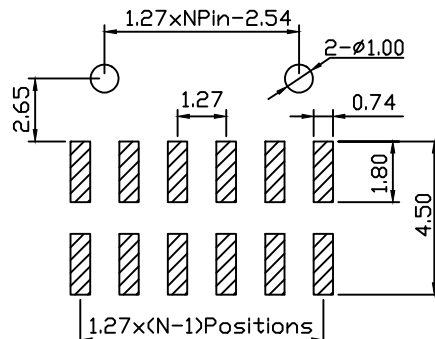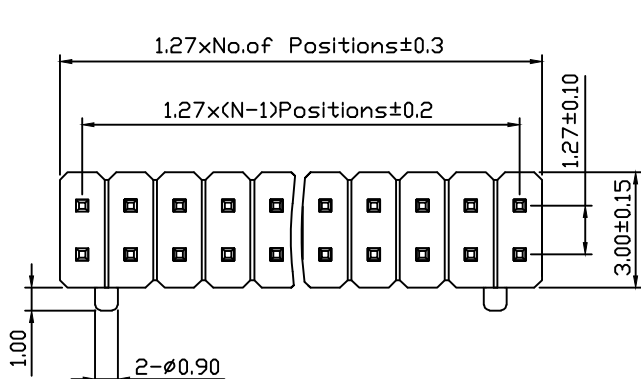

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE±0.05)

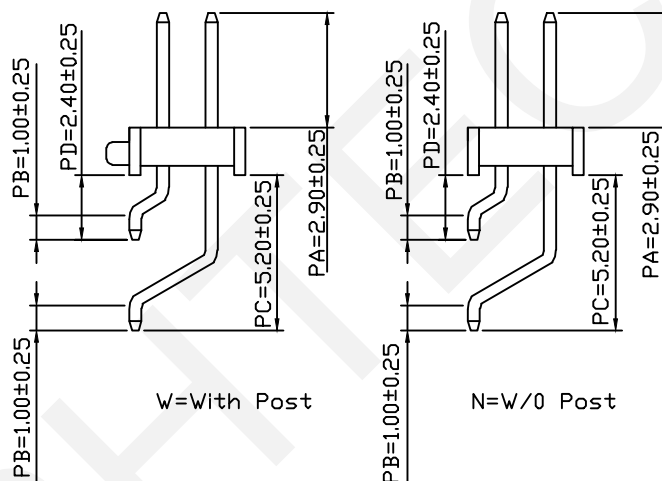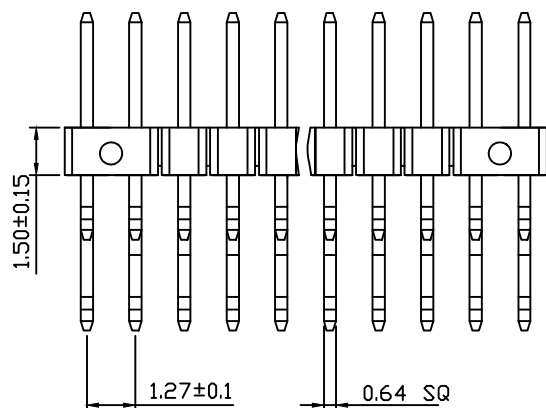

Dimension Antitheses List (mm)					
ITEM	PA	PB	PC	PD	Plastic Height
Standard	2.90	1.00	5.20	2.40	1.50
Nonstandard	---	---	---	---	---

Material:  
Standard: PA6T  
Contact: Brass  
Insulator: Polyester,UL94V-0  
Electrical Characteristics:  
Rated Current: 1AMP  
Contact Resistance: 20mΩ Max  
Withstand Voltage: 500V AC/DC  
Insulator Resistance: 1000MΩ Min  
Mechanical  
Operating Temperature: -40°C~+105°C

Order Information:  
RHTAY07CA-1.50-2-XX-PAxPCxPDxPB-G0-W-R

Pin Header Series  
07CA: 1.27mm  
Plastics Height:  
1.50, 2.00, 2.50 mm  
Per Row: Double Layer  
Pin: No. of Pins (2~80)  
Size: PAxPCxPDxPB  
Plating:  
G0=Gold Flash G1=1u" Gold G10=10u"Gold  
G15=15u" Gold G30=30u" Gold  
Post: W=With Post N=W/0 Post  
Packing:  
0=PE Bag A=Tray T=Tube  
P=Tube+Cap R=Reel+Cap

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

1.27mm Pin Header  
Double Layer,2xN PinHorizontal SMT  
THIRD ANGLE PROJECTION  
RHTAY07CA-1.50-2-XX-PAxPCxPB-G0-W-R