
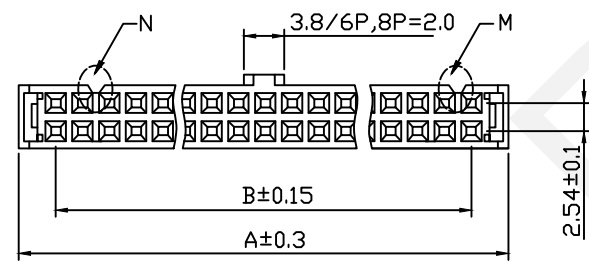

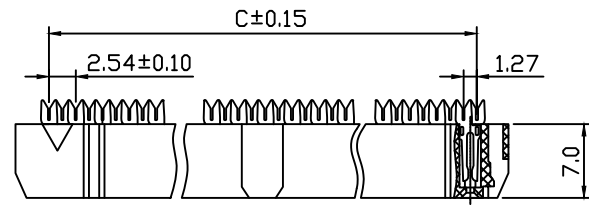

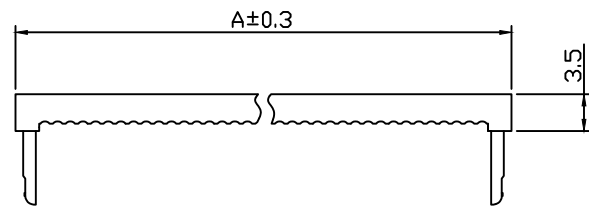



RoHS Compliance

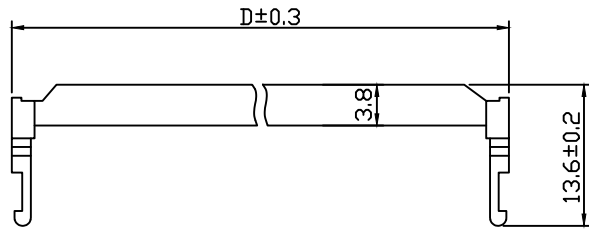

Pin	Dimension mm			
	A	B	C	D
06	12.42	5.08	6.35	12.12
08	14.96	7.62	8.89	14.66
10	17.50	10.16	11.43	17.20
12	20.04	12.70	13.97	19.74
14	22.58	15.24	16.51	22.28
16	25.12	17.78	19.05	24.82
18	27.66	20.32	21.59	27.36
20	30.20	22.86	24.13	29.90
24	35.28	27.94	29.21	34.98
26	37.82	30.48	31.75	37.52
28	40.36	33.02	34.29	40.06
30	42.90	35.56	36.83	42.60
34	47.98	40.64	41.91	47.68
40	55.60	48.26	49.53	55.30
44	60.68	53.34	54.61	60.38
50	68.30	60.96	62.23	68.00
60	81.00	73.66	74.93	80.70
64	86.08	78.74	80.01	85.78

Material:

Housing: PBT,UL94V-0

Contact: Brass

Plating: Au Or Sn Over 50u" Nickel

Electrical Characteristics:

Current Rating : 3.0AMP

Withstand Voltage: 1000V AC/Minute

Contact Resistance: 20M ohm Max

Operating Temperature:-40°C~+105°C

Max.Processing Temp:180°C For 30-60 Seconds (200°C For 10 Seconds)

Note:

6P Without Slot M and N

8P~12P With Slot M, Without Slot N

14P~64P With Slot M and N

Order Information:

RHTAYB04-XX-B

IDC Connectors-

2.54mm Pitch

XX-No.of 06~64pin

Color:


B=Black G=Gray L=Blue

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

2.54mm Pitch IDC Socket Connector

THIRD ANGLE PROJECTION



RHTAYB04-XX-B