
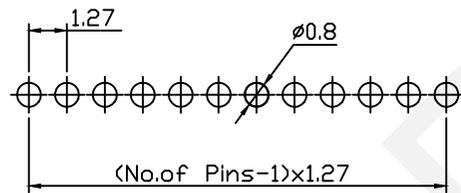
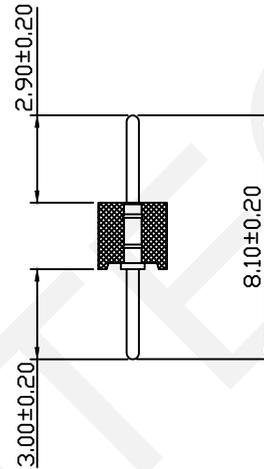
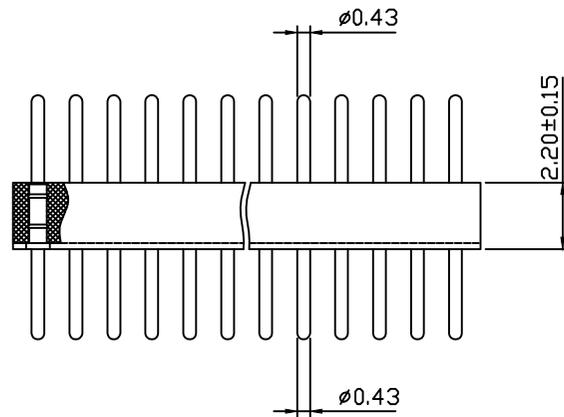


RoHS Compliance

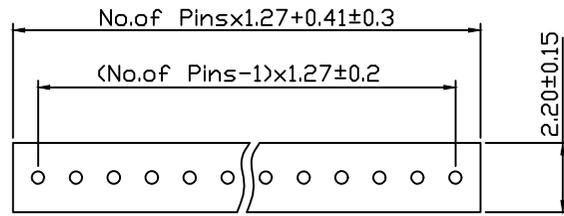

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Brass

Electrical Characteristics:

Current Rating : 1.0AMP

Voltage Rating : 60V AC/DC

Insulator Resistance: 1000M Ω min. at 100V AC

Contact Resistance: 20m Ω max.

Operating Temperature: -40 $^{\circ}$ C ~ +105 $^{\circ}$ C

Order Information:

RHTAY09XC-2.2-1-XX-S

IC Socket

Height:

2.2mm, 1.9mm

ROW

1-Single Layer

2-Double Layer

No. of 2~100 Pins

Type: S Straight Pin

R-Right Angle Pin T-SMT Pin



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

1.27x1.27mm Round Pin Header
SIP Socket Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTAY09XC-2.2-1-XX-S

1

2

3

4

5



6

7

8

9

RoHS Compliance

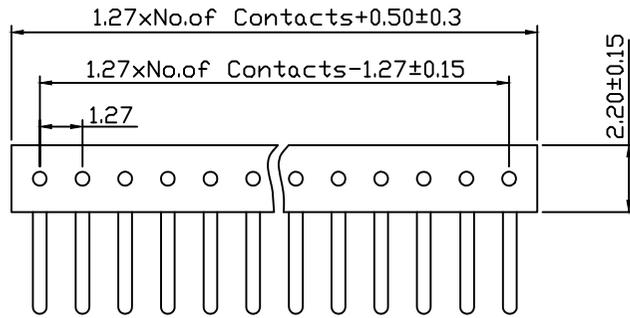

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Brass

Electrical Characteristics:



Current Rating : 1.0AMP

Voltage Rating : 60V AC/DC

Insulator Resistance: 1000MΩ min. at 100V AC

Contact Resistance: 20mΩ max.

Operating Temperature: -40°C ~ +105°C

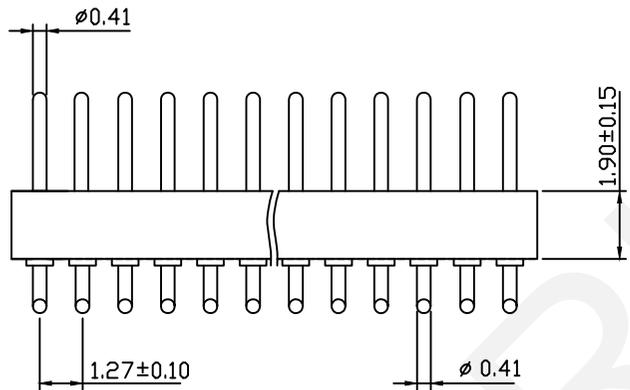

Order Information:

RHTAY09XC-1.9-1-XX-R

IC Socket

Height:

2.2mm, 1.9mm

ROW

1-Single Layer

2-Double Layer

No. of 2~100 Pins

Type: S Straight Pin

R-Right Angle Pin T-SMT Pin



RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5



CHK'D BY FENG
APPR BY ZHAN

1.27x1.27mm Round Pin Header
SIP Socket Connector
THIRD ANGLE PROJECTION
RHTAY09XC-1.9-1-XX-R

RoHS Compliance

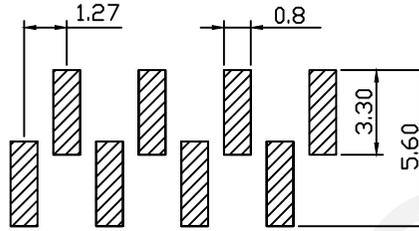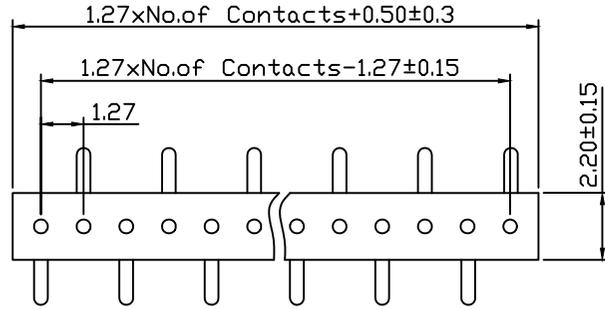

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

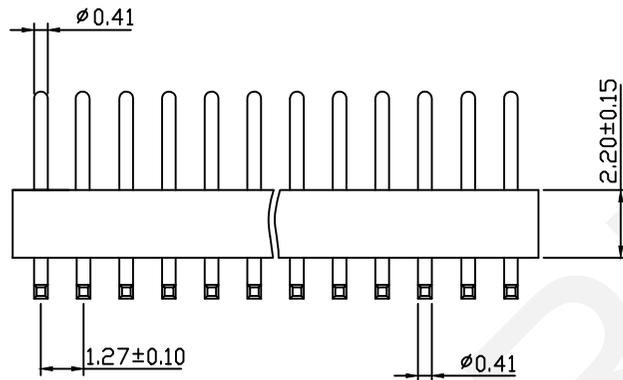

Material:

Housing:30% Glass Filled PPS UL94V-0

Contacts:Brass

Electrical Characteristics:

Current Rating :1.0AMP

Voltage Rating :60V AC/DC

Insulator Resistance:1000MΩ min.at 100V AC

Contact Resistance:20mΩ max.

Operating Temperature:-40°C~+105°C

Order Information:

RHTAY09XC-1.9-1-XX-T2-T

IC Socket

Height:

2.2mm,1.9mm

ROW

1-Single Layer

2-Double Layer

No.of 2~100 Pins

Type: S Straight Pin

R-Right Angle Pin T2-SMT Pin


Packing: T=Tube R=Reel

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5





CHK'D BY FENG
APPR BY ZHAN

1.27x1.27mm Round Pin Header
SIP Socket Connector



RHTAY09XC-1.9-1-XX-T2-T

RoHS Compliance

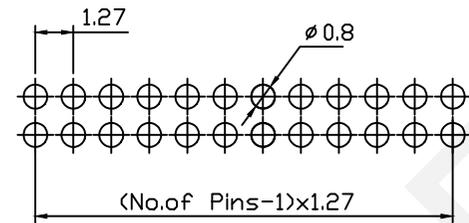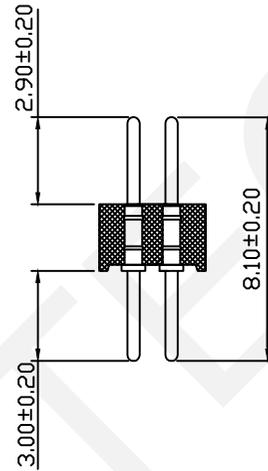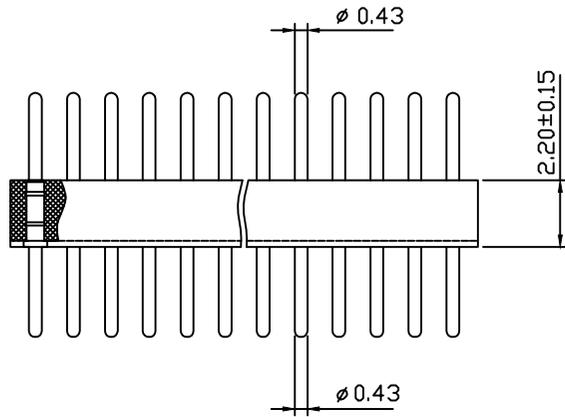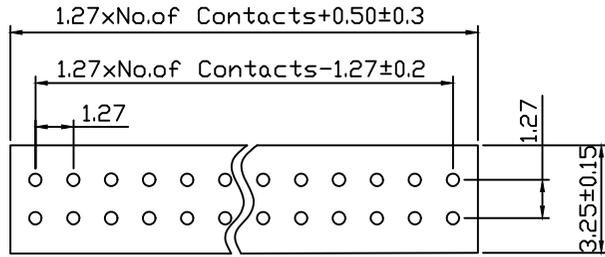

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Brass

Electrical Characteristics:

Current Rating :1.0AMP

Voltage Rating :60V AC/DC

Insulator Resistance: 1000MΩ min.at 100V AC

Contact Resistance: 20mΩ max.

Operating Temperature: -40°C~+105°C

Order Information:

RHTAY09XC-2.2-2-XX-S

IC Socket

Height:

2.2mm, 1.9mm

RDW

1-Single Layer

2-Double Layer

No.of 2~100 Pins

Type: S Straight Pin


R-Right Angle Pin T-SMT Pin



NINGBO RHT ELECTRONIC CO.,LTD



UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN





1.27x1.27mm Round Pin Header
SIP Socket Connector
RHTAY09XC-2.2-2-XX-S

RoHS Compliance

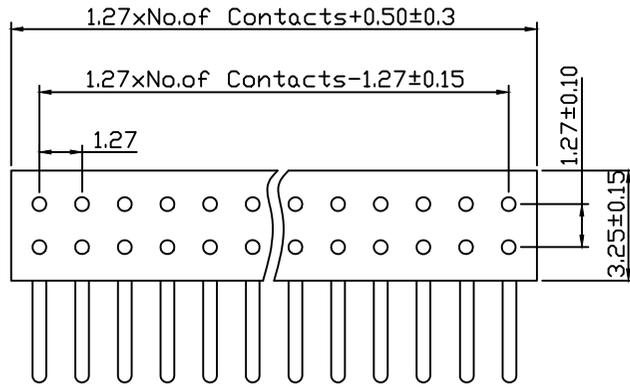

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

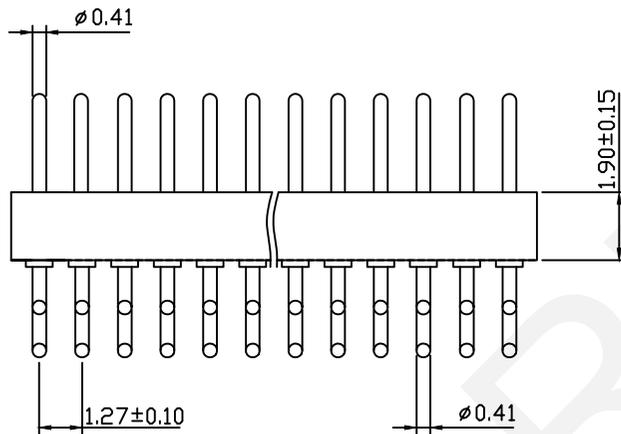

Material:

Housing:30% Glass Filled PPS UL94V-0

Contacts:Brass

Electrical Characteristics:

Current Rating :1.0AMP

Voltage Rating :60V AC/DC

Insulator Resistance:1000MΩ min.at 100V AC

Contact Resistance:20mΩ max.

Operating Temperature:-40°C~+105°C

Order Information:

RHTAY09XC-1.9-2-XX-R

IC Socket

Height:

2.2mm,1.9mm

ROW

1-Single Layer

2-Double Layer

No.of 2~100 Pins

Type: S Straight Pin

R-Right Angle Pin T-SMT Pin



RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5



CHK'D BY FENG
APPR BY ZHAN

1.27x1.27mm Round Pin Header
SIP Socket Connector
THIRD ANGLE PROJECTION
RHTAY09XC-1.9-2-XX-R

RoHS Compliance

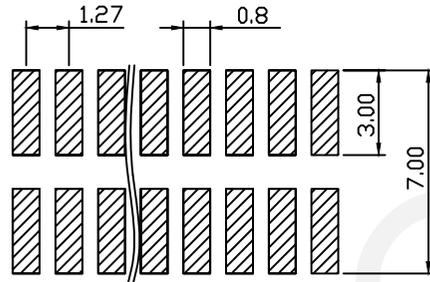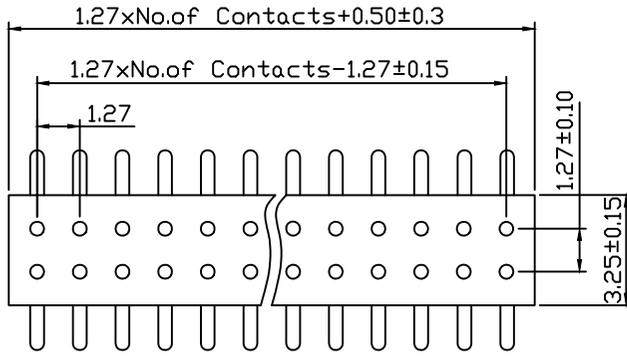


Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

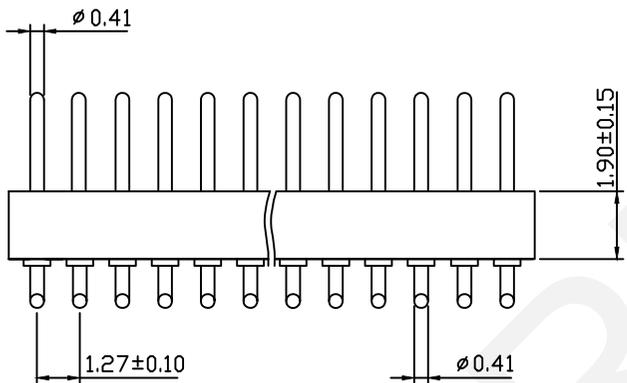

Material:
Housing:30% Glass Filled PPS UL94V-0
Contacts:Brass

Electrical Characteristics:
Current Rating :1.0AMP
Voltage Rating :60V AC/DC
Insulator Resistance:1000MΩ min.at 100V AC
Contact Resistance:20mΩ max.
Operating Temperature:-40°C~+105°C


Order Information:

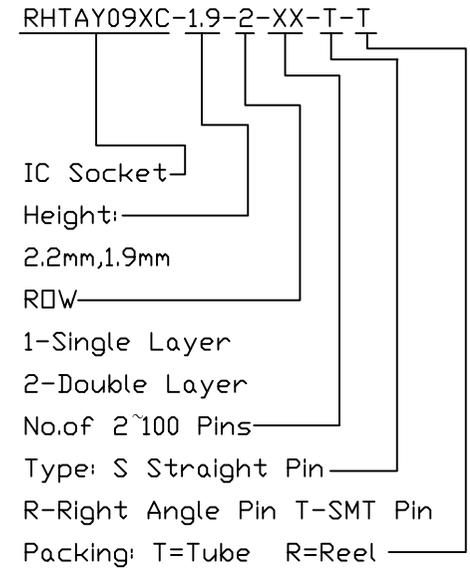

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN



1.27x1.27mm Round Pin Header
SIP Socket Connector
RHTAY09XC-1.9-2-XX-T-T