
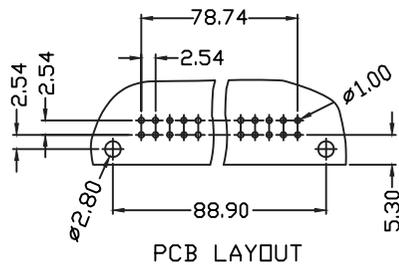


Male-Right Pin/2x32Pin

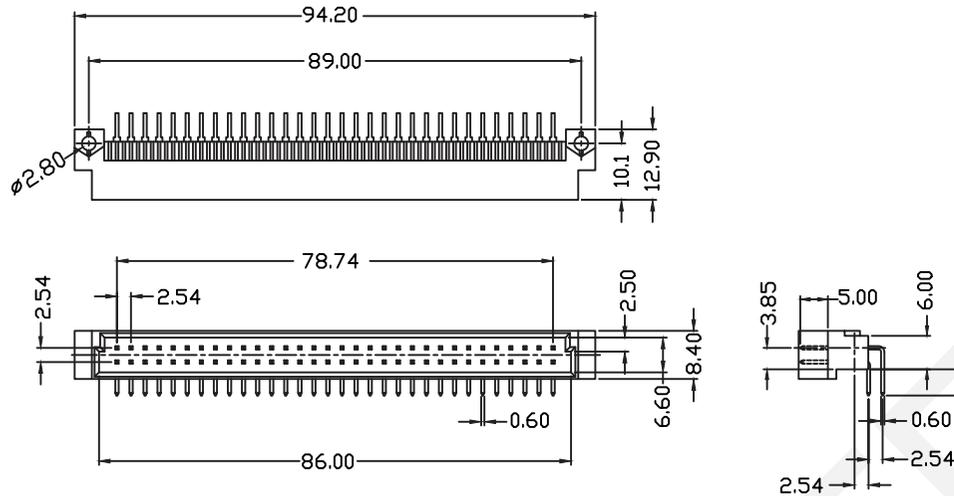

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	64	a b		2264
	32	a -		2132
5.08mm	32	a b		2232
	16	a -		2116

Electrical:


Contact Resistance:30mΩ Max.At DC 100mA
 Insulation Resistance:1000 MΩ Min.at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating:2 AMP
 Volatge Rating:250 VAC
 Operating Temperature:-55°C~+105°C

Material:

Insulator:Glass-filled Thermoplastic PBT UL94V-0
 Contacts:Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDERINFORMATION

ProductNo.:RHTAY2-2264-MR

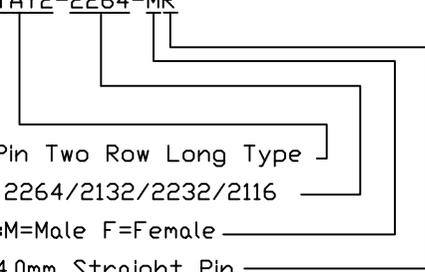

Din41612 2x32Pin Two Row Long Type

Part Number: 2264/2132/2232/2116

Contact Type:M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin





R-Right Pin

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

2x32Pin Two Row Long B Type	
THIRD ANGLE PROJECTION	RHTAY2-2264-MR

NINGBO RHT ELECTRONIC CO.,LTD

Female-4.0mm Straight Pin/2x32Pin

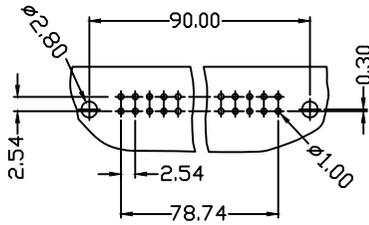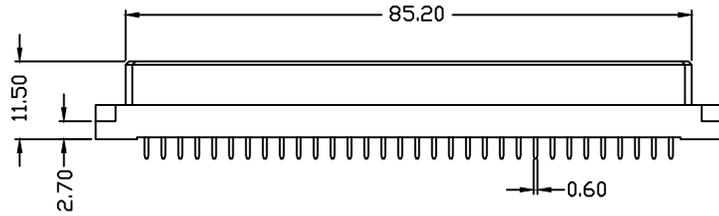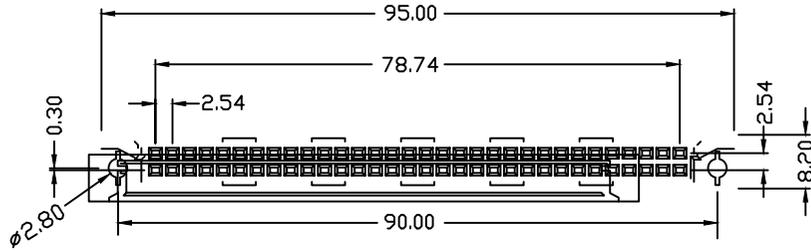

PCB LAYOUT

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	64	a b		2264
	32	a -		2132
5.08mm	32	a b		2232
	16	a -		2116

Electrical:

Contact Resistance: 30mΩ Max. At DC 100mA
 Insulation Resistance: 1000 MΩ Min. at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating: 2 AMP
 Voltage Rating: 250 VAC
 Operating Temperature: -55°C~+105°C

Material:

Insulator: Glass-filled Thermoplastic PBT UL94V-0
 Contacts: Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.: RHTAY2-2264-FS

Din41612 2x32Pin Two Row Long Type


Part Number: 2264/2132/2232/2116

Contact Type: M=Male F=Female



Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin

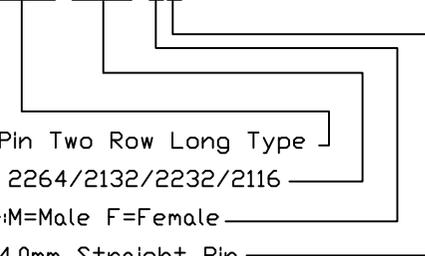

Female-13mm Straight pin /2x32Pin

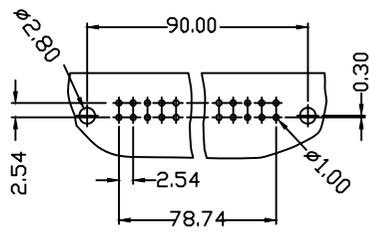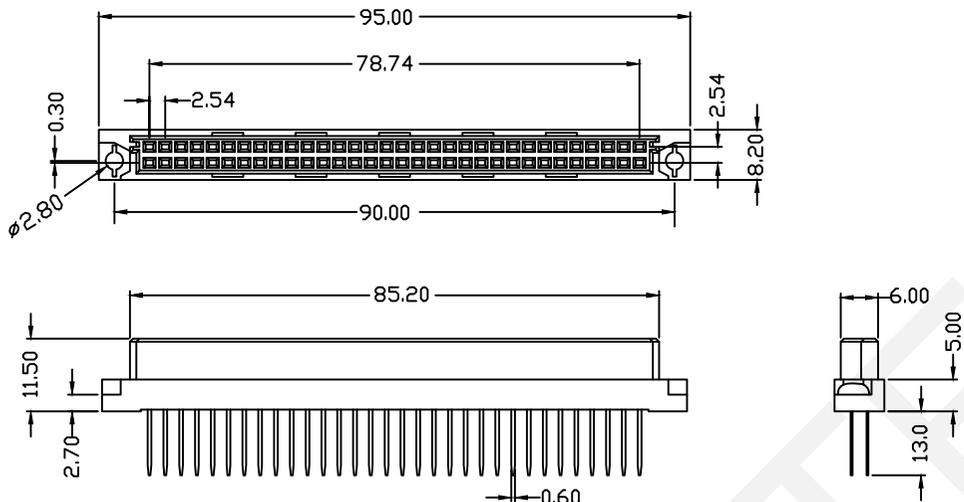

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	64	a b		2264
	32	a -		2132
5.08mm	32	a b		2232
	16	a -		2116

Electrical:

Contact Resistance:30mΩ Max.At DC 100mA
 Insulation Resistance:1000 MΩ Min.at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating:2 AMP
 Voltage Rating:250 VAC
 Operating Temperature:-55°C~+105°C

Material:

Insulator:Glass-filled Thermoplastic PBT UL94V-0
 Contacts:Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.:RHTAY2-2264-MW1

Din41612 2x32Pin Two Row Long Type


Part Number: 2264/2132/2232/2116

Contact Type:M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin

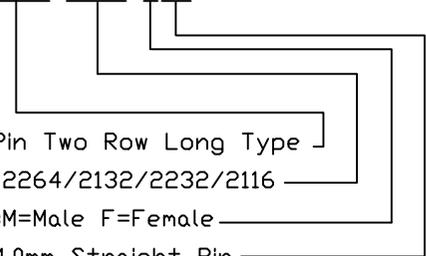




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

2x32Pin Two Row Long B Type
 THIRD ANGLE PROJECTION

 RHTAY2-2264-MW1

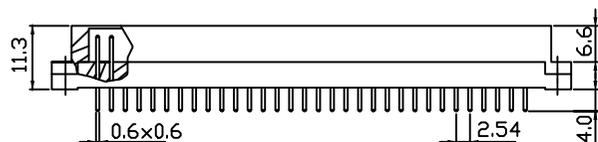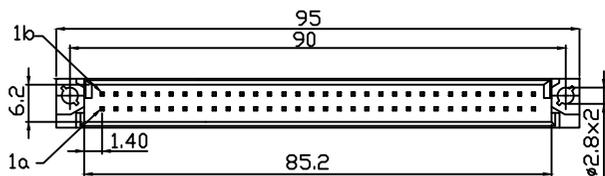

PCB LAYOUT

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	64	a b		2264
	32	a -		2132
5.08mm	32	a b		2232
	16	a -		2116

Electrical:

Contact Resistance: 30mΩ Max. At DC 100mA
 Insulation Resistance: 1000 MΩ Min. at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating: 2 AMP
 Voltage Rating: 250 VAC
 Operating Temperature: -55°C ~ +105°C

Material:

Insulator: Glass-filled Thermoplastic PBT UL94V-0
 Contacts: Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.: RHTAY2-2264-MS

Din41612 2x32Pin Two Row Long Type


Part Number: 2264/2132/2232/2116

Contact Type: M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin




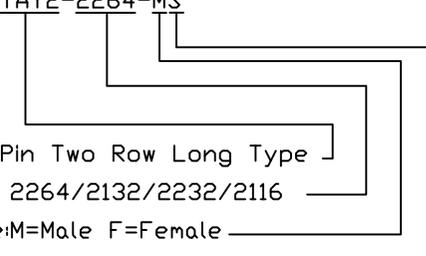


NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2x32Pin Two Row Long Q Type

RHTAY2-2264-MS

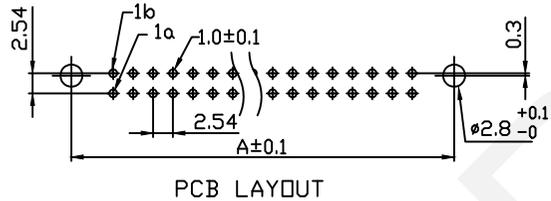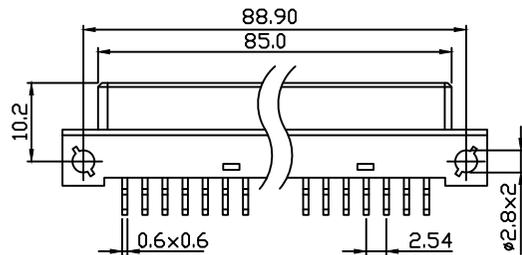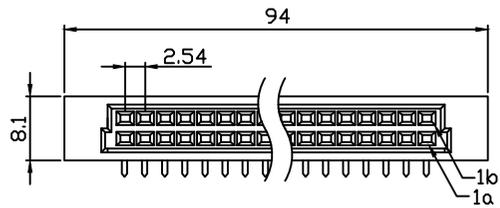

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	64	a b		2264
	32	a -		2132
5.08mm	32	a b		2232
	16	a -		2116

Electrical:

Contact Resistance: 30mΩ Max. At DC 100mA
 Insulation Resistance: 1000 MΩ Min. at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating: 2 AMP
 Voltage Rating: 250 VAC
 Operating Temperature: -55°C ~ +105°C

Material:

Insulator: Glass-filled Thermoplastic PBT UL94V-0
 Contacts: Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.: RHTAY2-2264-FR

Din41612 2x32Pin Two Row Long Type


Part Number: 2264/2132/2232/2116

Contact Type: M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin

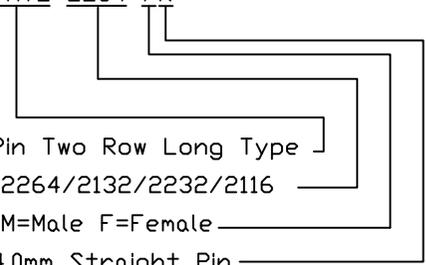




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

2x32Pin Two Row Long Q Type

THIRD ANGLE PROJECTION

RHTAY2-2264-FR

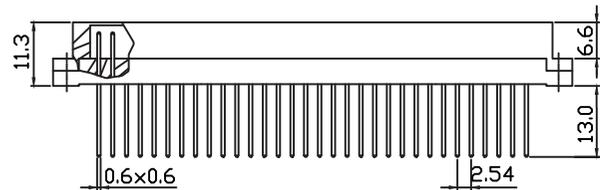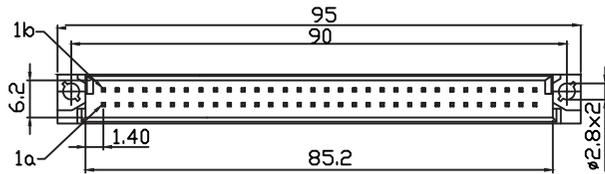

PCB LAYOUT

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	64	a b		2264
	32	a -		2132
5.08mm	32	a b		2232
	16	a -		2116

Electrical:

Contact Resistance: 30mΩ Max. At DC 100mA
 Insulation Resistance: 1000 MΩ Min. at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating: 2 AMP
 Voltage Rating: 250 VAC
 Operating Temperature: -55°C ~ +105°C

Material:

Insulator: Glass-filled Thermoplastic PBT UL94V-0
 Contacts: Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.: RHTAY2-2264-MW1

Din41612 2x32Pin Two Row Long Type


Part Number: 2264/2132/2232/2116

Contact Type: M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin

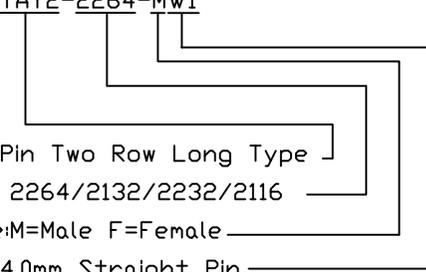


NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

2x32Pin Two Row Long Q Type



RHTAY2-2264-MW1