






PIN	Signal Name	PIN	Signal Name
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

Material
 Housing:High Temperature Plastic,Black
 Contact:Copper Alloy,Au/Ni Plated
 Shielding Plate:Stainless Steel,Ni Plated
 Spring:Stainless Steel
 Shell:Stainless Steel Ni/Sn Plated
 MD:High Temperature Plastic,Black

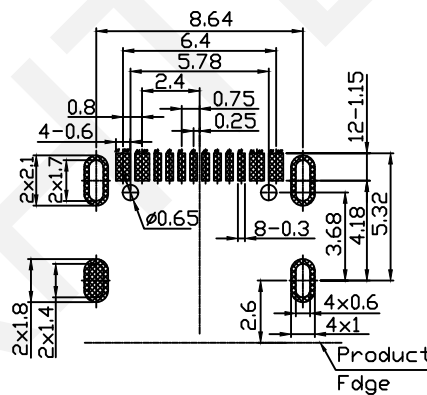

Electrical
 Current Rating:1.5A Max
 Voltage:30 Vac
 Withstand Voltage: 100 VAC
 Contact Resistance: 40 Millionhm Max
 Insulation Resistance:100 Megohms Min

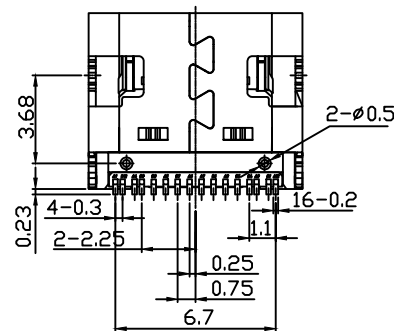


RECOMMENDED P.C.B.LAYOUT
 TOLERANCE UNSPECIFIED±0.05mm

Mechanical
 Operating Temperature:-30°C TO +85°C
 Insertion Force :5n~20n
 Unmating Force:8n~20n
 Order Information

RHTAY416-B
 USB C F TYPE
 Color:B-Black

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

USB CF TYPE
 THIRD ANGLE PROJECTION

 RHTAY416