

1 2 3 4 5 6 7 8 9

A

B

C

D

E

F

A



B

C

D

E

F

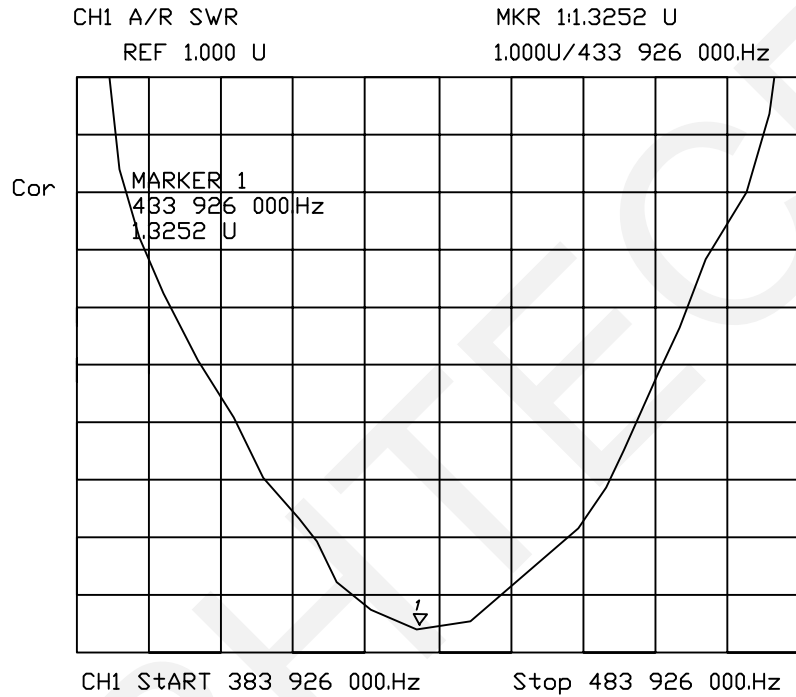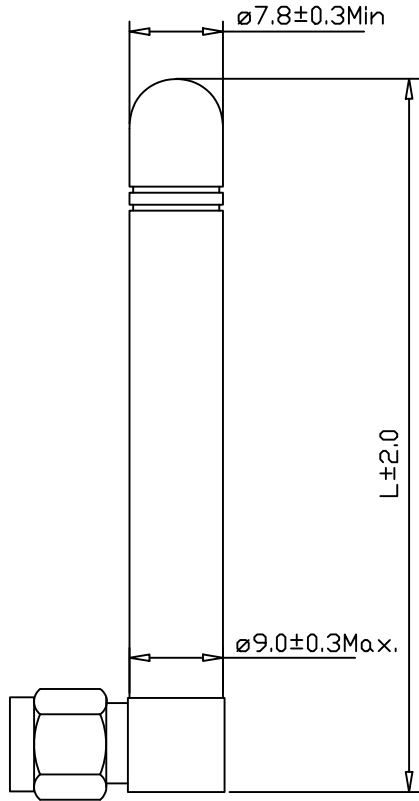

Specification:

Frequency: 433+ 10MHz

Gain : 2dBi

Vswr : 2.0 Max.

Impedance : 50 Ω

Polarization : Vertical

Radiation : \square OMNDIRECTIONAL

Connector : SMA-J

Lightning protection: DC Grounding

Operating Temperature : -30°C to + 70°C

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
± 0.12	± 0.15	± 0.3	± 0.5	APPR BY ZHAN	

3307 Antenna

THIRD ANGLE PROJECTION



RHTAY3307

1 2 3 4 5 6 7 8 9

G

G