



P.C.B LAYOUT
TOP VIEW

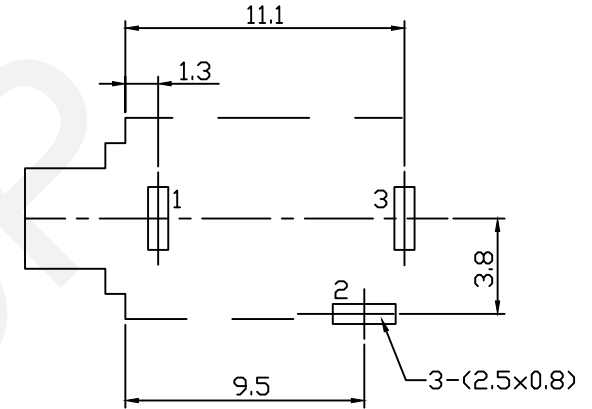

P.C.B LAYOUT



Material:

- 1.Flat Piece:H62 Brass,Cu-Sn-Plating
- 2.Curve Piece:H62 Brass,Sn-Sb-Plating
- 3.Spring Piece:65Mn Steel,Sn-Sb-Plating
- 4.Axis Support:H59 Brass,Ni-Plating
- 5.Housing:ABS

SPELIFICATION

- 1.Rating:DC 30V 0.5A.
- 2.Contact Resistance: $\leq 0.03\Omega$
- 3.Insulation Resistance: $\geq 100M\Omega$ (DC250V)
- 4.Withstand Voltage:500VAC.
- 5.Insertion And Extraction Force:3-20N
- 6.Life Test:5,000 Cycles.

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

2.5mm Mono Jack For Panel Mount

THIRD ANGLE PROJECTION



RHTAYG2.5-004A