

1 2 3 4 5 6 7 8 9

A

A

B

B

C

C

D



D

E

E

F

F

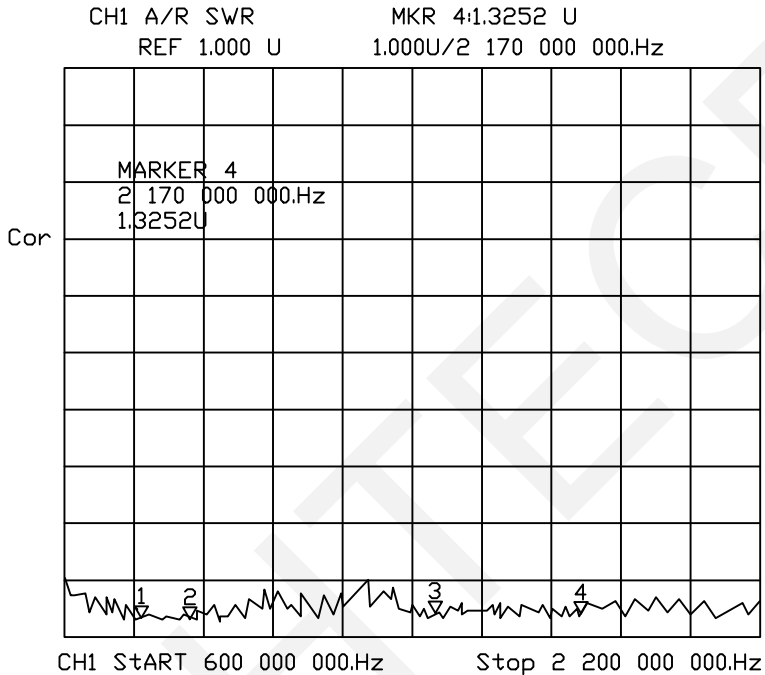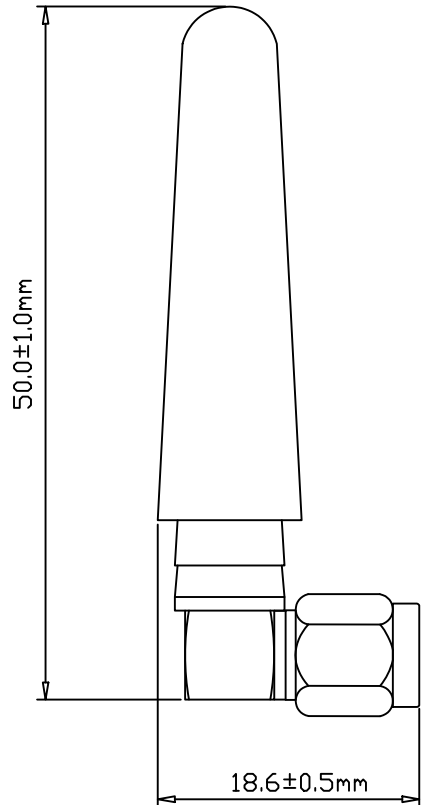

Specification:

Frequency: 824~960/1710~2170MHz

Gain : 2dBi

Vswr : 1.5 Max.

Impedance : 50 Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Connector : SMA-J

Lightning protection: DC Grounding

Operating Temperature : -30°C to + 70°C

G


G



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	3G Antenna	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	RHTAYGR100	

THIRD ANGLE PROJECTION



1 2 3 4 5 6 7 8 9