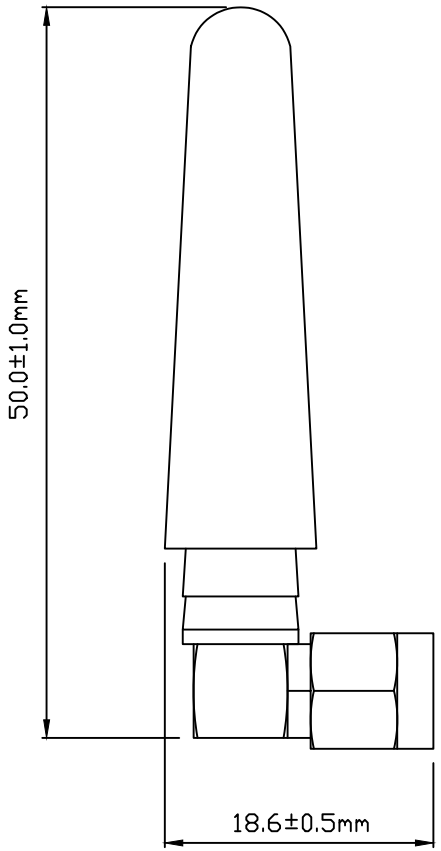

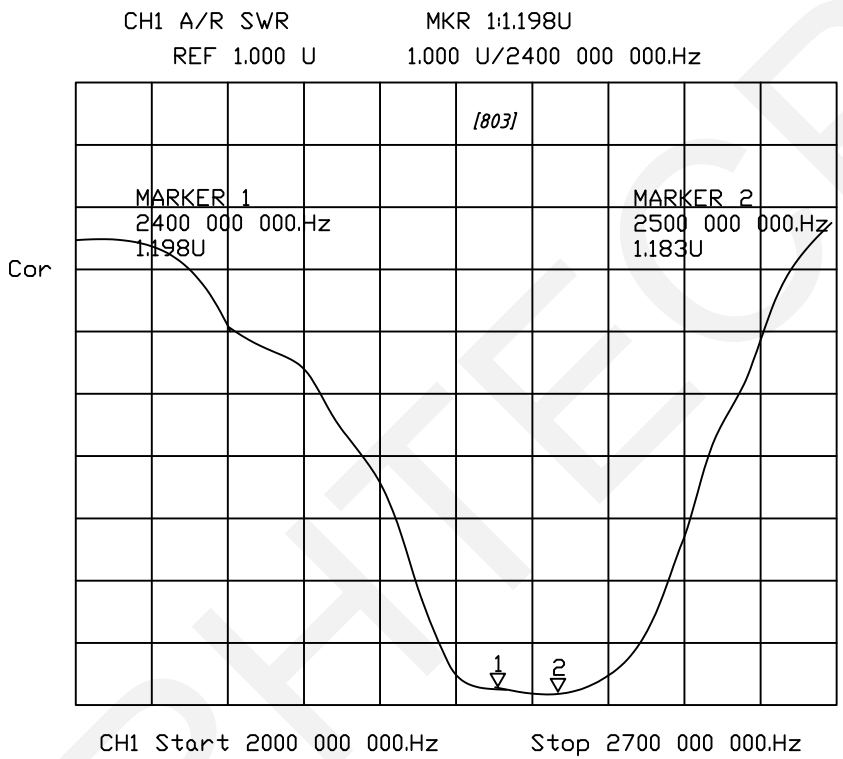

Specification.

Frequency:2400~2500MHz

Gain : 2dBi

Vswr :1.5 Max

Impedance :50Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Max power :50W

Shell material:PVC

Connector :SMA Pin

Lightning protection: DC Grounding

Operating Temperature :-30°C to+70°C

RHTECP

RHTECP NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	WIFI 2.4G Antenna	
	0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
	±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	RHTAYIFI15011