

SPECIFICATION

Rated Load:DC 30V 1.0A

Contact Resistance:30mΩ, Max


Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V


Actuating Force:3-20N

Life:5000 Cycles

Operating Temperature:-30°C-70°C

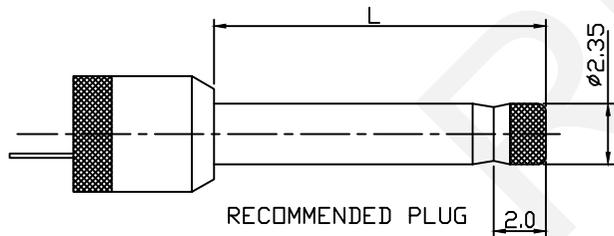

SCHEMATIC



NO	Description	QTY	Material	Plating
1	Housing	1	PBT	---
2	Flat Piece	1	Brass	Ag-Plating
3	Spring	1	SUS301	Ag-Plating
4	PIN	1	Bronze	Ag-Plating
5	Contact Foot	1	Brass	Ag-Plating

1

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

DC POWER Jack DIP

THIRD ANGLE PROJECTION



RHTAYC-011