




SPECIFICATION



Rated Load:DC 30V 0.5A
 Contact Resistance:30mΩ, Max
 Insulation Resistance:100MΩ, Min
 Withstand Voltage:AC500V
 Actuating Force:3~20N
 Life:5000 Cycles
 Operating Temperature:-30°C~70°C

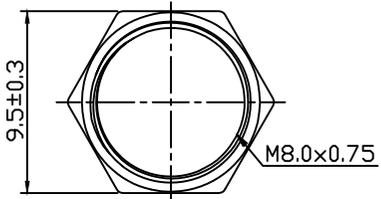

SCHEMATIC



PIN	∅2.0	∅2.5
APPD		



NO	Description	QTY	Material	Plating
1	1#Curve Piece	1	Brass	Sn-Plating
2	2#Curve Piece	1	Brass	Sn-Plating
3	Spring	1	Bronze	Sn-Plating
4	PIN	1	Brass	Ni-Plating
5	Axis Support	1	Brass	Ni-Plating
6	Housing	1	PBT	---
7	Nut	1	Brass	Ni-Plating
8	Split Washer	1	Iron	Ni-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN

DC POWER Jack DIP
 THIRD ANGLE PROJECTION
 RHTAYC-025B