

Technical Parameters:

Contact Resistance: 30m Ω , Max

Insulation Resistance: 100M Ω , Min

Pressure: AC 500V (50Hz) / 1 Minute

Rated Load: DC 30V 1A

Actuating Force: 3~20N

Life: 5000 Times

Operating Temperature: -30 $^{\circ}$ C~70 $^{\circ}$ C

Order information

RHTAYC-026-2.5

DC Power Socket


Center Pin Dimension

RHTECP NINGBO RHT ELECTRONIC CO.,LTD



UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
± 0.12	± 0.15	± 0.3	± 0.5	APPR BY ZHAN	

METAL FEMALE SOCKET DC CONNECTOR ROHS

THIRD ANGLE PROJECTION



RHTAYC-026

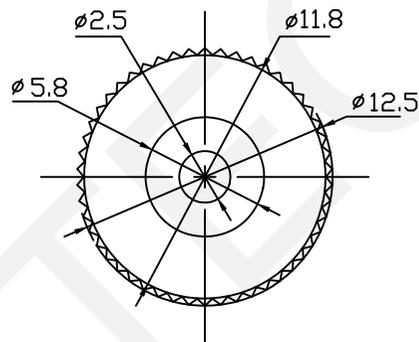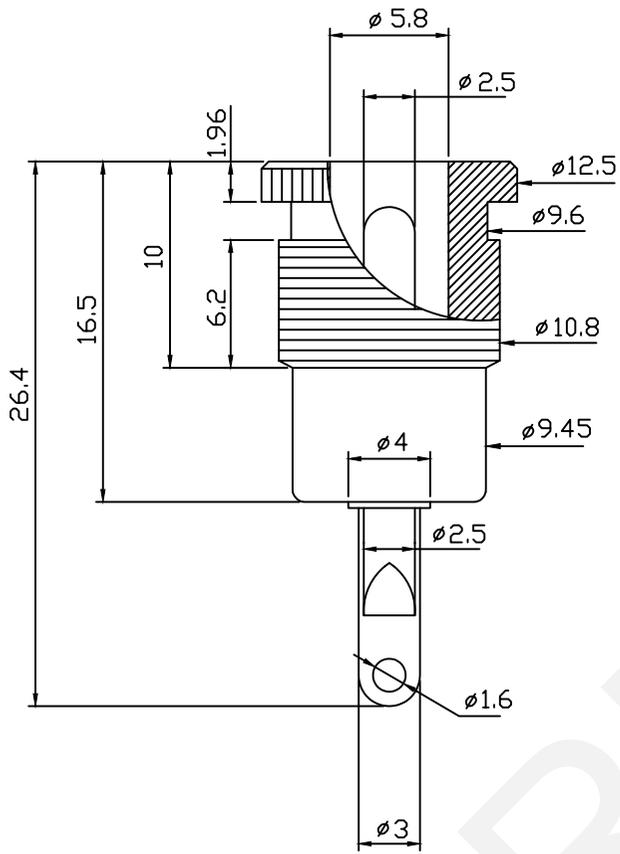

Technical Parameters:

Contact Resistance: 30mΩ, Max

Insulation Resistance: 100MΩ, Min

Pressure: AC500V(50Hz)/1Minute

Rated Load: DC 30V 1A

Actuating Force: 3~20N

Life: 5000 Times

Operating Temperature: -30°C~70°C

Order information

RHTAYC-026-2.5

DC Power Socket

Center Pin Dimension

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

METAL FEMALE SOCKET DC CONNECTOR ROHS

THIRD ANGLE PROJECTION



RHTAYC-026