
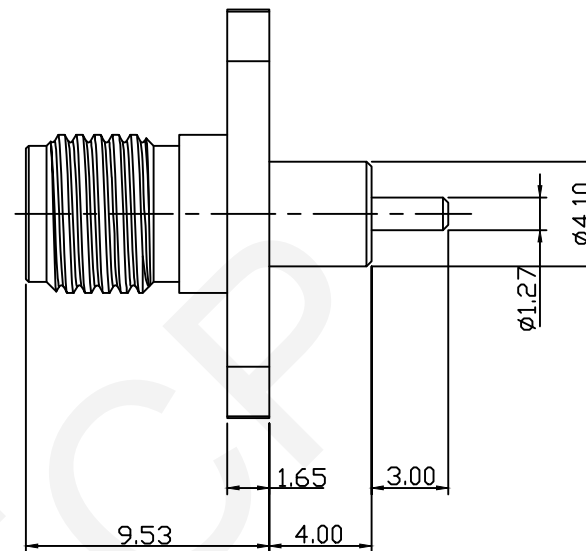


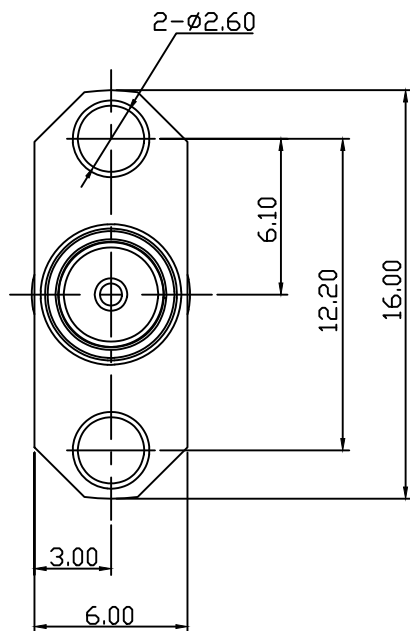

#### Material:

Body:Brass,Gold Plating

Insulator:PTFE,Natural

Contact:Ber.Copper,Gold Plating

#### Electrical:

Impedance:500Ω

Frequency Range:0-6 GHz

D.W.V:1000 VRMS. MIN.

#### Mechanical:

Durability:500 Cycles Min.

Temperature Range:-65℃ to +165℃

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2-Hole Flange Panel Mount SMA  
Connector Straight(Jack,Female,50Ω)

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15



±0.3

±0.5

APPR BY ZHAN



RHTAYMA-KFD

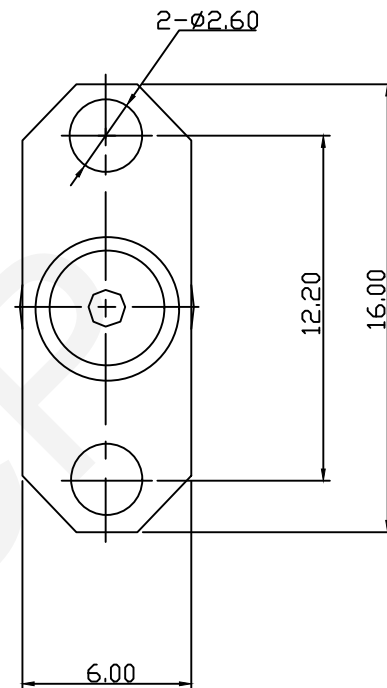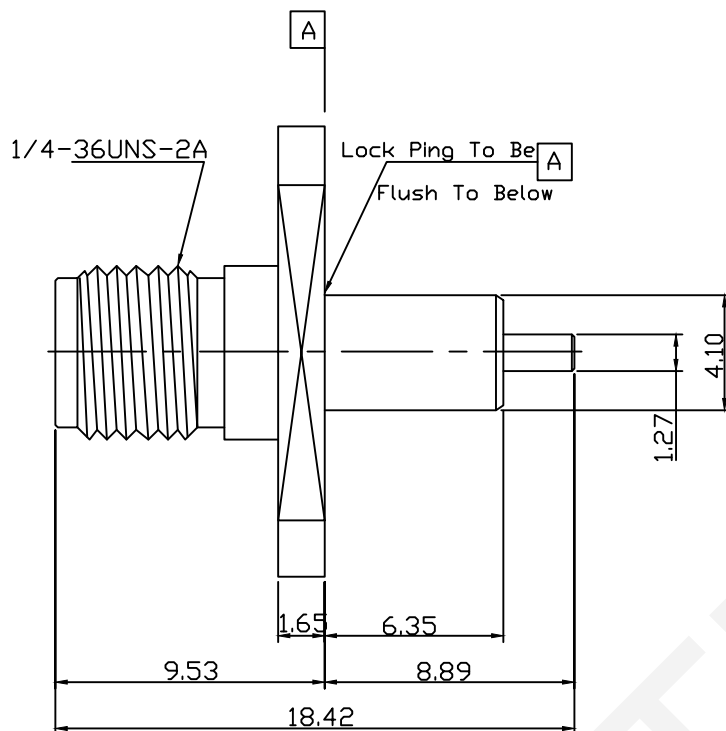

Material:

Body:Brass,Gold Plating

Insulator:PTFE,Natural

Contact:Ber.Copper,Gold Plating

Electrical:

Impedance:500 $\Omega$

Mechanical:

Durability:500 Cycles Min.

Temperature Range:-65 $^{\circ}$ C to +165 $^{\circ}$ C

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD



| UNITS:mm | SHEET SIZE: A4 |       |        | SCALE:--- |
|----------|----------------|-------|--------|-----------|
| 0~3      | 3~18           | 18~50 | 50~120 |           |
| ±0.12    | ±0.15          | ±0.3  | ±0.5   |           |

|               |
|---------------|
| DRWN BY PAN   |
| CHK'D BY FENG |
| APPR BY ZHAN  |

2-Hole Flange Panel Mount SMA  
Connector Straight(Jack,Female,50 $\Omega$ )



RHTAYMA-KFD

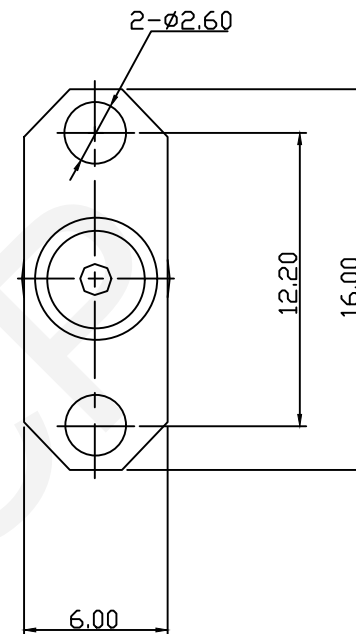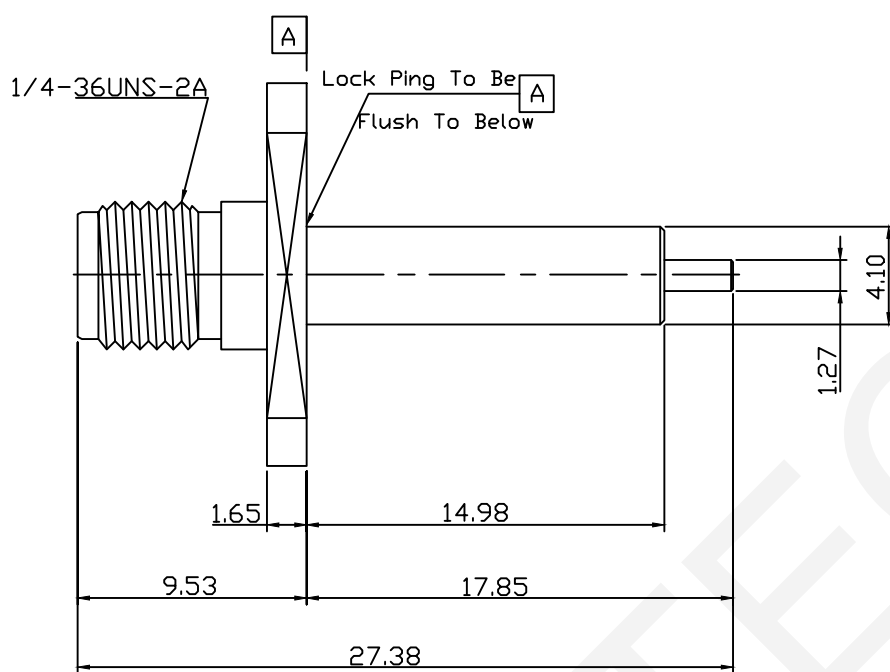

Material:

Body:Brass,Gold Plating

Insulator:PTFE,Natural

Contact:Ber.Copper,Gold Plating

Electrical:

Impedance:500Ω

Mechanical:

Durability:500 Cycles Min.

Temperature Range:-65℃ to +165℃

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

| UNITS:mm | SHEET SIZE: A4 |       |        | SCALE:--- |
|----------|----------------|-------|--------|-----------|
| 0~3      | 3~18           | 18~50 | 50~120 |           |
| ±0.12    | ±0.15          | ±0.3  | ±0.5   |           |


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

2-Hole Flange Panel Mount SMA  
Connector Straight(Jack,Female,50Ω)

THIRD ANGLE PROJECTION



RHTAYMA-KFD