




Recommended P.C.B. Layout

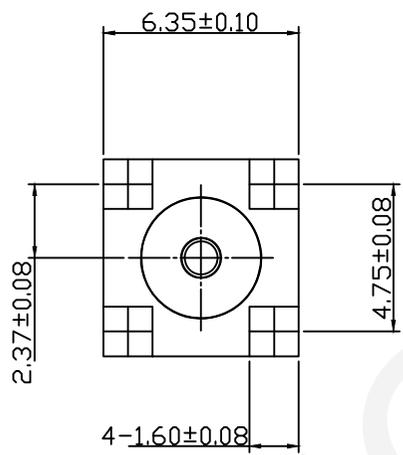

Material  
 Body:Brass,Plating Gold  
 Center Contact:Beryllium Copper,Plating Gold  
 Dielectric:Polytetrafluoroethylene (PTFE)  
 Electrical:  
 Impedance:50Ω  
 Durability:500 Cycles Min.  
 Voltage Rating :500V  
 Operating Temperature:-65℃~165℃

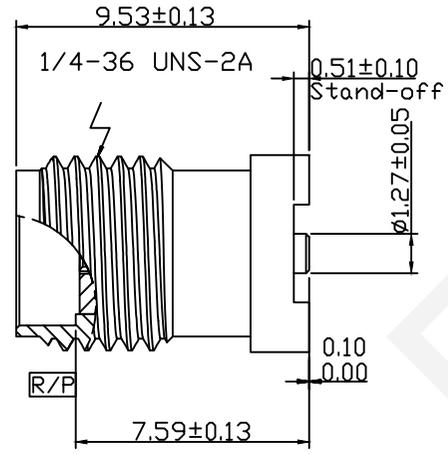


Contact to Stand-off

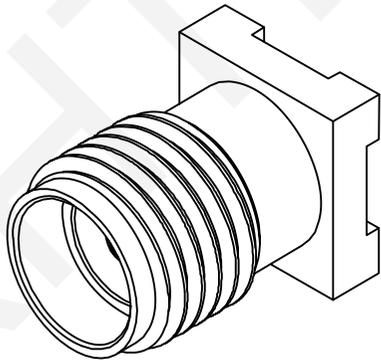

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN  
 CHK'D BY FENG  
 APPR BY ZHAN

Surface Mount SMA Connector (Jack,Male,50Ω)  
 THIRD ANGLE PROJECTION  
  
 RHTAYMA037