

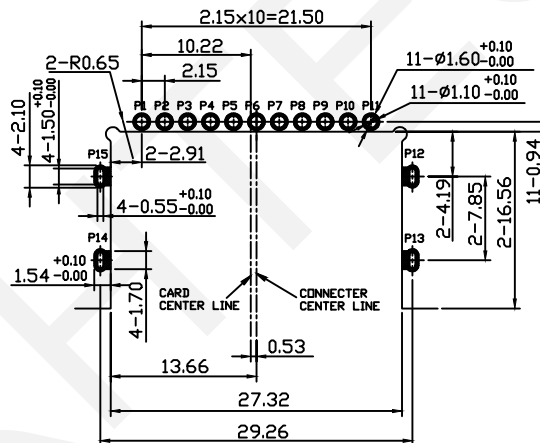
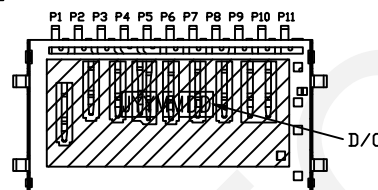


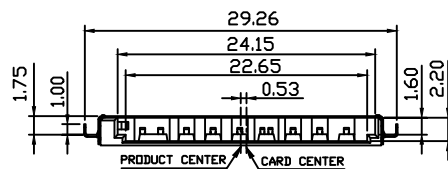


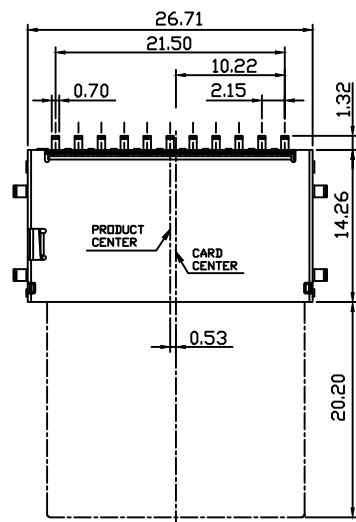

RECOMMEND PCB LAYOUT
TOLERANCE:±0.05



Material:
Housing:LCP S475,UL 94V-0.Black.
Shell:Stainless Steel SUS304
Contact:Copper Alloy C5210.
Finish:
Contact:Gold Plated On Contact Area.Matte Tin 100u"
Min On Solder tail Area 50u" Min Nickel Plating Overall
Shell:30u" Min Solderable Nickel Plating Overall.

Connector Pin No.	SD Card Pin No	Pin Define
P1	P9	DAT3
P2	P1	DAT3
P3	P2	CMD
P4		CD
P5	P3	VSS1
P6	P4	VDD
P7	P5	CKL
P8	P6	VSS2
P9	P7	DAT0
P10	P8	DAT1
P11		WP
P12-P15		GND

WITHOUT ACRD	CARD INSERTED LOCK	CARD INSERTED UNLOCK
W/P GND	W/P GND	W/P GND
C/D VSS1	C/D VSS1	C/D VSS1
P3	P3	P3

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

SD Card CONN,Reverse MID
MOUNT 1.75mm,DIP With CD Pin

THIRD ANGLE PROJECTION

RHTAYD003