

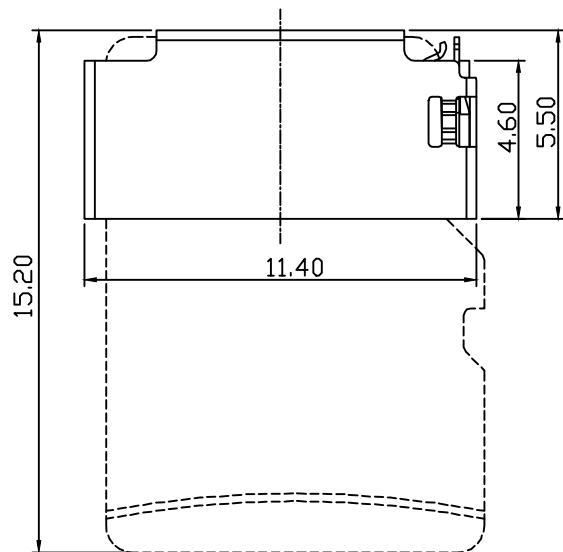


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

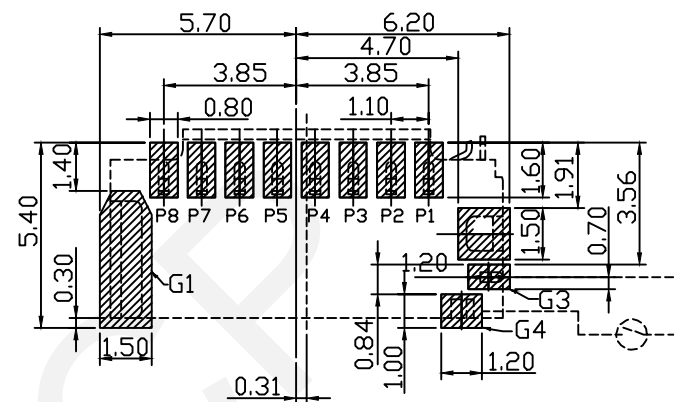

NORMAL OPEN SWITCH
FOR CARD DETECT

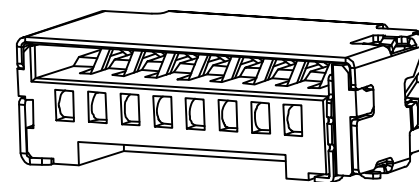

Material:

Housing: Thermoplastic, UL94V-0, Natural.

Terminal: Copper Alloy, Au Plating, Contact Area: G/F, Matte Tin Plated On Soldering Shell: Stainless Steel.

Electrical:

Contact Resistance: $80\text{m}\Omega$ Max.

Insulation Resistance: $100\text{M}\Omega$ Min.

Dielectric Withstanding Voltage: 500V AC.

Mechanical Characteristics Retention Force: Min. 100gf/Pin

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
± 0.12	± 0.15	± 0.3	± 0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

SD Card CONN,PUSH/PULL,H3.75mm,SMD

THIRD ANGLE PROJECTION



RHTAYF-006