
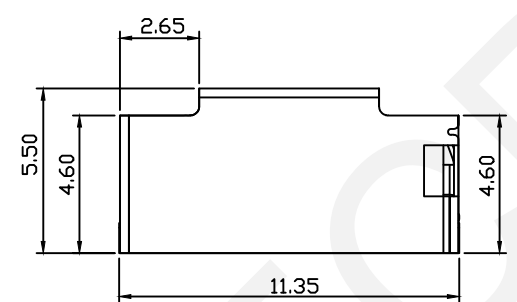


Material:
Housing:Hi-Temp Plastic,UL94V-0,Black
Contact:Phosphor Bronze
Shell:Stainless Steel.
Finish:
Contact:G/F Gold Plated On Conatct Area;
G/Fplated On Solder Tails,Base Nickel 50u" Min
Shell:50u" Nickel Under,100u" Tin Overall.
Contact Resistance:80mΩ Max.
Insulationresistance:1000MΩ Min./500VDC
Withstanding Voltage:500V AC Minute
Temperature Range:-40°C +85°C
Mating Cycles: 3000 Insertions

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE±0.05

Pin	Pin Assigenment
Pin 1	DAT2
Pin 2	CD/DAT3
Pin 3	CMD
Pin 4	VDD
Pin 5	CLK
Pin 6	VSS
Pin 7	DAT0
Pin 8	DAT1

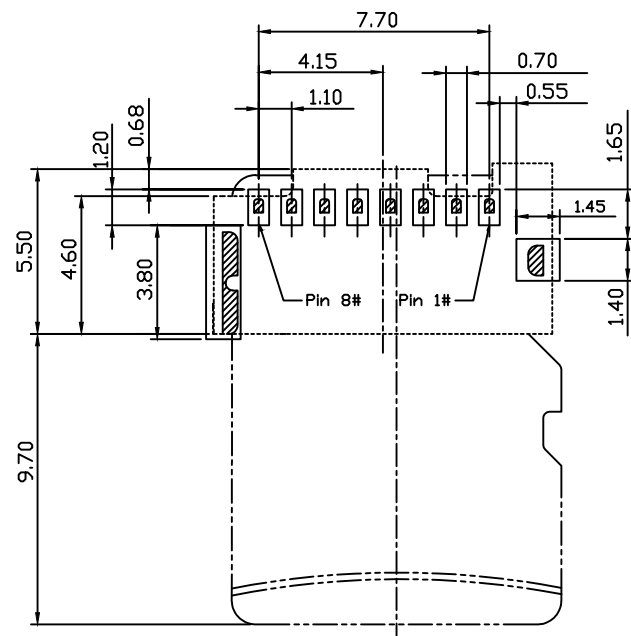