
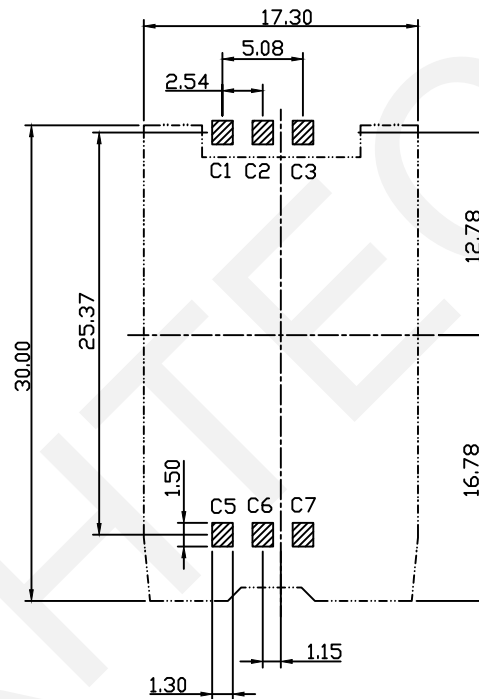
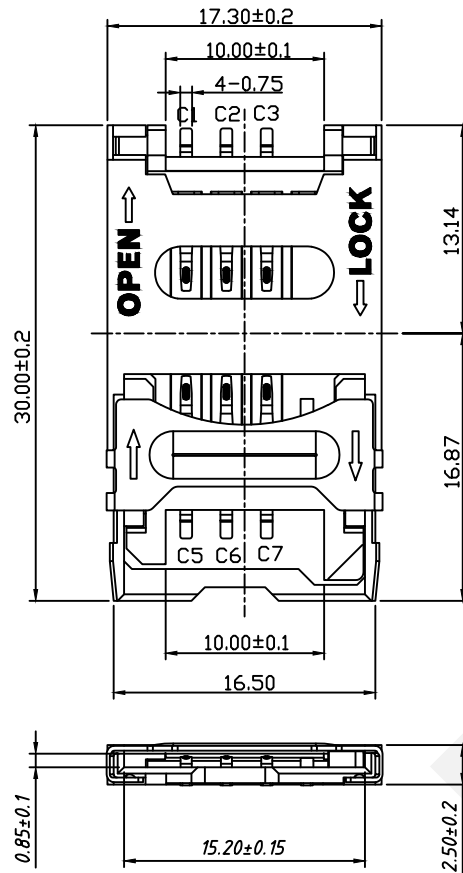


RECOMMENDED P.C.B.LAYOUT
COMPONENT SIDE(TOLERANCE±0.05)



Material:
Housing:LCP UL94V-0
Contact Terminal:Phosphor Bronze
Metallic Shell:Stainless Steel-SUS304

Plating:
Contact Terminal Plating
Contact Area:5u" Gold
Soldering Area:100u" Tin
Under-plating:50u" Nickel above

Electrical:
Voltage Rating:50V max
Current Rating:1A max
Operating Temperature:-40℃to +85℃
Contact Resistance:50 mΩ typical,100mΩ max
Insulating Resistance:1000 mΩ min.Apply 500V DC
Dielectric Withstanding Voltage:500 VAC for 1minute

Mechanical:
Durability:min 5,000 cycles

Packing:
R=Roll Pack T=Tube Pack

RHTECP NINGBO RHT ELECTRONIC CO.,LTD






UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

SIM CARD CONN,Hinged type,6P,H2.54mm,SMD



RHTAYIM-012-6P-R

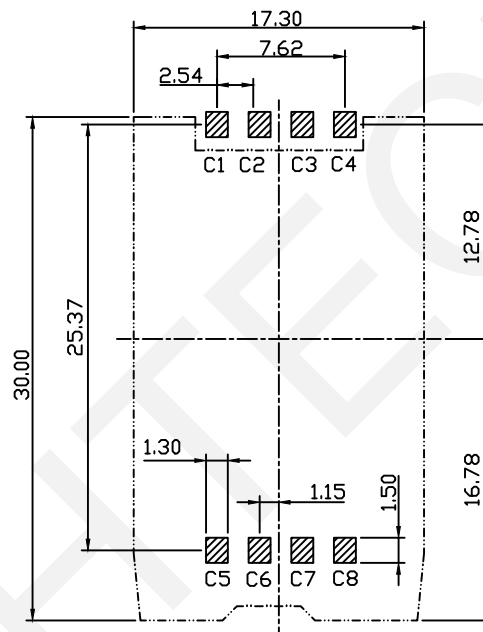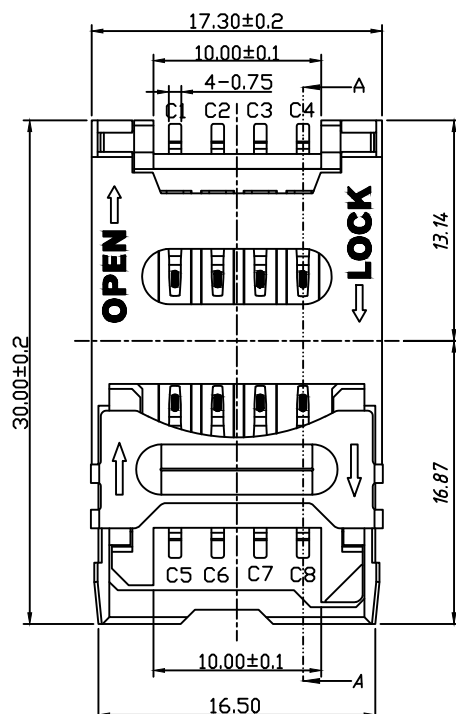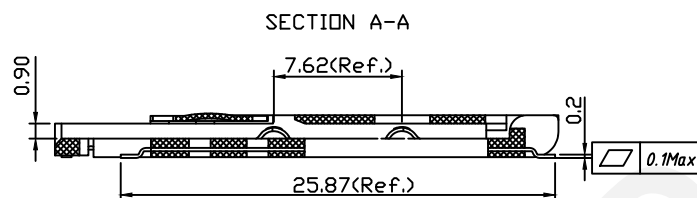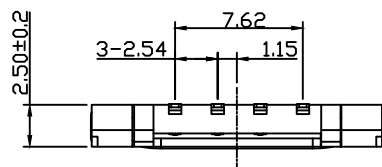

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE (TOLERANCE ±0.05)

Material:
Housing: LCP UL94V-0
Contact Terminal: Phosphor Bronze
Metallic Shell: Stainless Steel-SUS304

Plating:
Contact Terminal Plating
Contact Area: 5u" Gold
Soldering Area: 100u" Tin
Under-plating: 50u" Nickel above

Electrical:
Voltage Rating: 50V max
Current Rating: 1A max
Operating Temperature: -40°C to +85°C
Contact Resistance: 50 mΩ typical, 100mΩ max
Insulating Resistance: 1000 mΩ min. Apply 500V DC
Dielectric Withstanding Voltage: 500 VAC for 1 minute

Mechanical:
Durability: min 5,000 cycles

Packing:
R=Roll Pack T=Tube Pack

RHTECP® NINGBO RHT ELECTRONIC CO., LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

SIM CARD CONN, Hinged type, 8P, H2.54mm, SMD

THIRD ANGLE PROJECTION



RHTAYIM-012-8P-R