

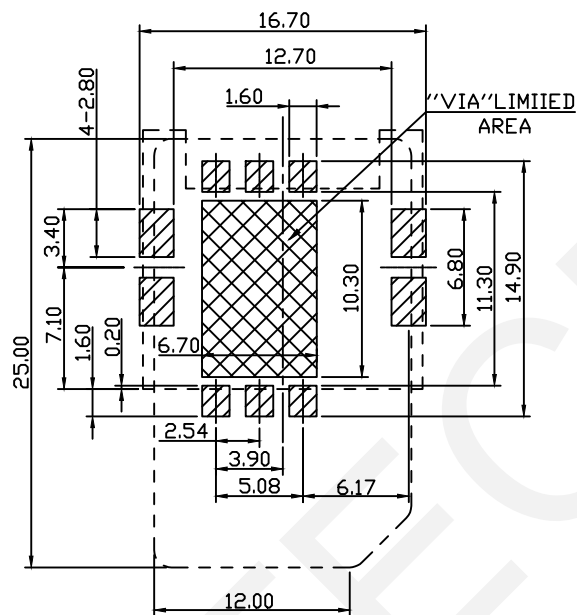
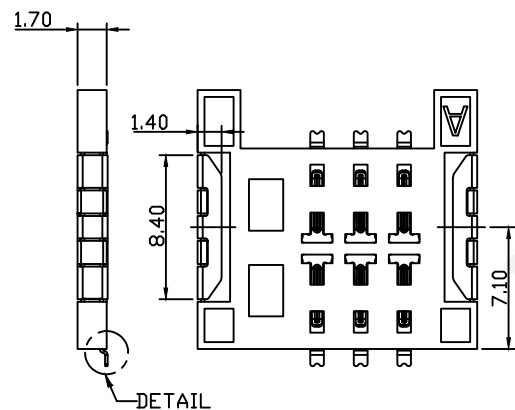
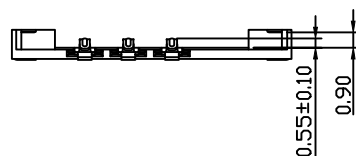


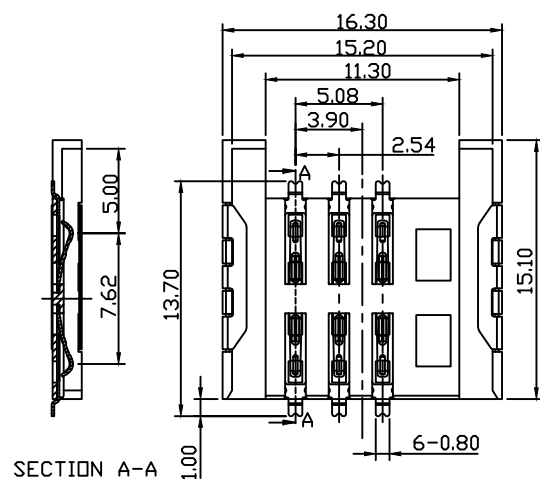

RECOMMENDED PCB LAYOUT

TOLERANCE±0.05



Electrical:

Current Rating:1.0 A max.

Contact Resistance:30mΩ Max.

Dielectric Withstanding Voltage:500V AC

RMS For One Minute.

Insulation Resistance:1000MΩ Min.At 500V DC

Operating Temperature:-40℃ TO +85℃


Operating Temperature:-45℃+105℃

Material:

Housing:Hi-Temp.Plastic,UL 94V-0.Black

Terminal:Copper Alloy,(T=0.15mm),Gold Plated Over Nickel.

Fork:Copper Alloy,(T=0.20mm), Tin Plated Over Nickel.



RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

SIM CARD CONN,PUSH PULL 6P,H1.7mm,SMD

THIRD ANGLE PROJECTION



RHTAYIM-015B