


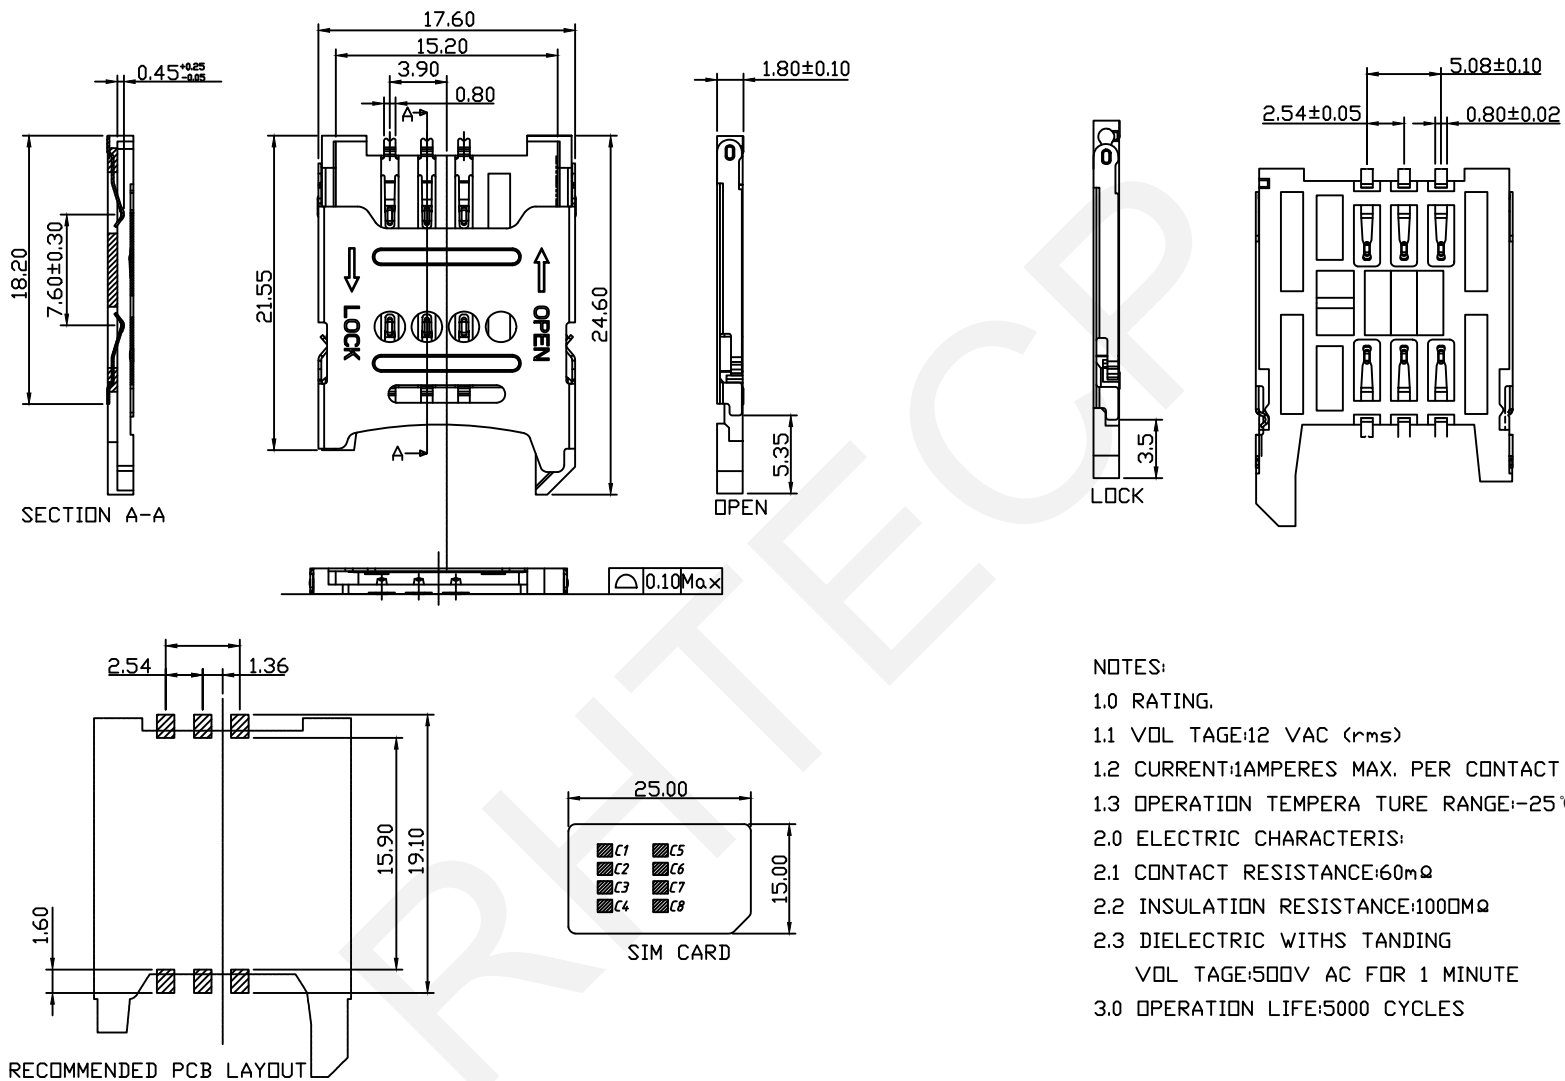

NOTES:

1.0 RATING.

1.1 VOL TAGE:12 VAC (rms)

1.2 CURRENT:1AMPERES MAX. PER CONTACT

1.3 OPERATION TEMPERA TURE RANGE:-25℃+70℃

2.0 ELECTRIC CHARACTERIS:

2.1 CONTACT RESISTANCE:60mΩ

2.2 INSULATION RESISTANCE:1000MΩ

2.3 DIELECTRIC WITHS TANDING

VOL TAGE:500V AC FOR 1 MINUTE

3.0 OPERATION LIFE:5000 CYCLES

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

SIM 6P Hinge Type 1.8H Gold Flash

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAYIM-018A-6P-H1.8-R

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

①

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

