


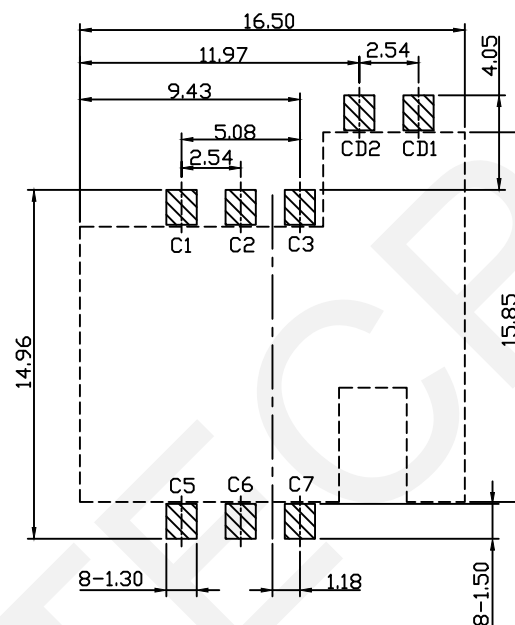
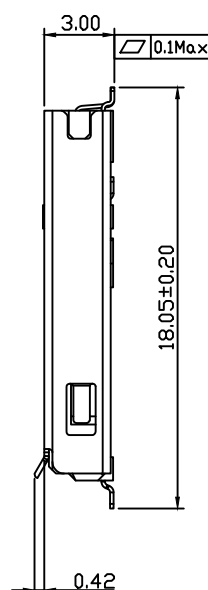
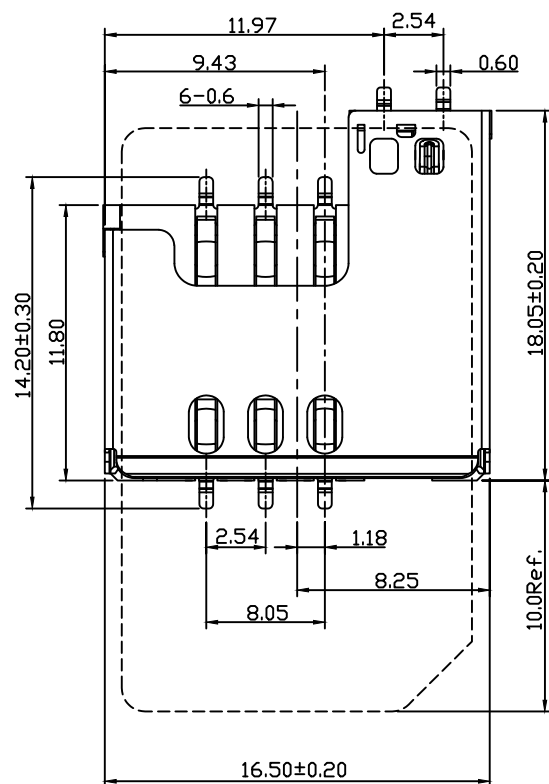




RECOMMENDED PCB LAYOUT
COMPONENT SIDE(TOLERANCE±0.05)

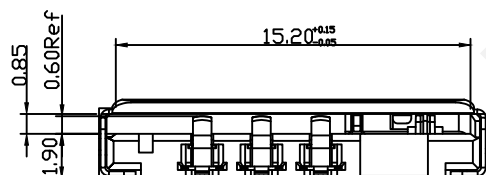

Electric Function	Detect Switch
Without Card	Closed
Card Inserted	Open



Material:

Base:Hi Temp Thermoplastic,Black UL94 V-0

Cover:Stainless Steel

Data Contact:Copper Alloy,Gold plated

Switch Contact 1:Copper Alloy,Gold plated

Switch Contact 2:Copper Alloy,Gold plated

Technical Characteristics

1.General Characteristics

Dimensions:

15.85Lx16.50Wx3.00H mm

Weight:Approx 0.78±0.2g

Durability:5000 cycles min

2.Electrical Characteristics

Contact Resistance:50mΩ

typical 100mΩ Max.

Insulation Resistance:1000MΩMin./500V DC

3.Solderability

IR reflow:260℃10 sec.Max.

Manual soldering:370℃,3 sec.Max.

4.Environmental Characteristics

Operating Temperature:-40℃TO +85℃

Operating Humidity:10%~95%RH

RHTECP NINGBO RHT ELECTRONIC CO.,LTD


UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG

APPR BY ZHAN

SIM Card Connector

THIRD ANGLE PROJECTION



RHTAYIM-C727-2