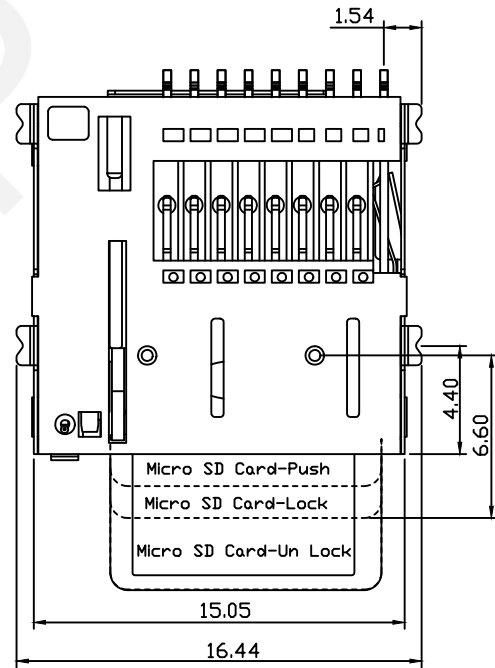

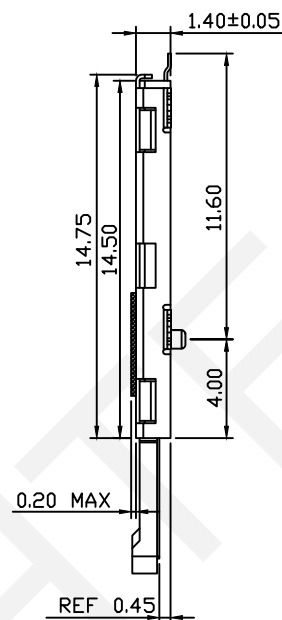
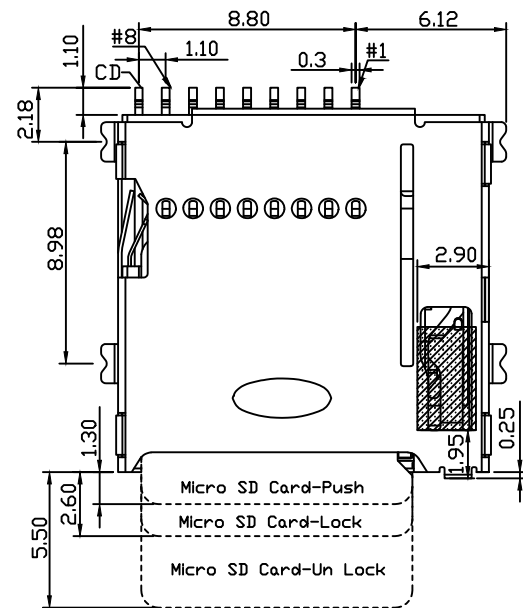
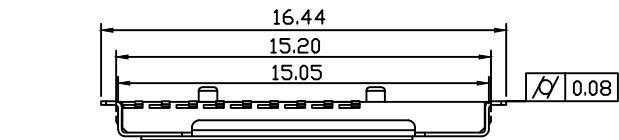


NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

DRWN BY PAN


CHK'D BY FENG

APPR BY ZHAN

Micro SD Card CONN:PUSH/
PUSH,H1.4mm,SMD with CD Pin

THIRD ANGLE PROJECTION

RHTAYF-012-9P-H1.4-R



Insulator:High Temperature Thermoplastic,UL94V-0.
Terminal:Copper Alloy,Plated 50u" Ni Overall. Plated Au Selective
Contact Area Plated 100u" Sn Over Ni On Solder Area.
Shell:Plated 50u" Ni Overall. Plated Au Selective Contact Area

Current Rating:0.5A AC/DC max.
Voltage Rating:125V AC/DC
Ambient Temperature Range:-25°C~+85°C
Storage Temperature Range:-25°C~+85°C
Ambient Humidity Range:95% R.H. Max.
Contact Resistance:100mΩ Max.
Insulation Resistance:1000MΩ Min./500VDC
Mating Cycles:5000-20000 Insertions.
Peak temperature:260°C±0.5°C

Pin NO	Pin Assignment
1#	DAT2
2#	CD/DAT3
3#	CMD
4#	VDD
5#	CLK
6#	VSS
7#	DAT0
8#	DAT1
9#	CD

