

SPECIFICATION

Rated Load:DC 30V5A

Contact resistance:30m $\Omega$ , max




Insulation resistance:100M $\Omega$ , min

Withstand Voltage:AC500V

Actuating Force:3-20N



Life:5000 cycles

Operating Temperature:-30 $^{\circ}$ C-70 $^{\circ}$ C

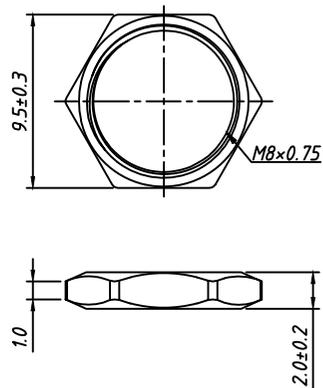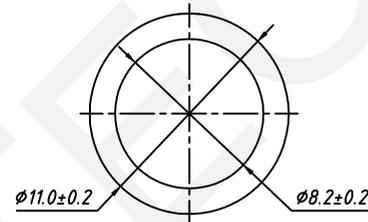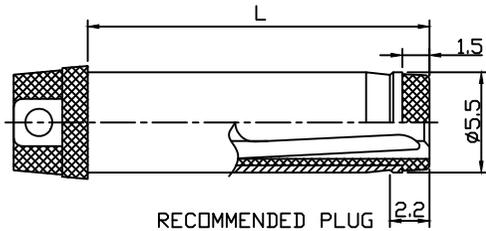

PIN	$\phi 2.0$	$\phi 2.5$
APPD		

SCHMATIC

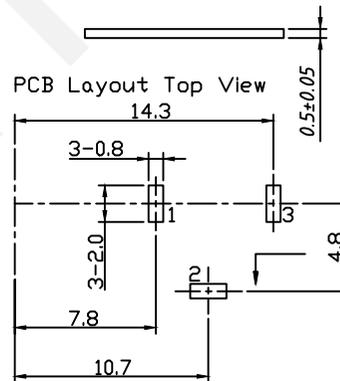

No.	Description	QTY	Material	Plating
1	Spring	1	Bronze	Sn-Plating
2	Curve Piece	1	Brass	Sn-Plating
3	Flag Piece	1	Brass	Sn-Plating
4	PIN	1	Brass	Ni-Plating
5	Axis Support	1	Brass	Ni-Plating
6	Housing	1	PBT	---
7	Nut	1	Brass	Ni-Plating
8	Split Washer	1	Iron	Ni-Plating

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
$\pm 0.12$	$\pm 0.15$	$\pm 0.3$	$\pm 0.5$	APPR BY ZHAN	

30V 5A DC Jack DIP

RHTAYD13C-025