
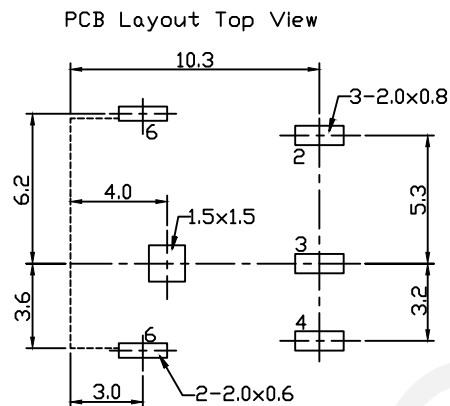


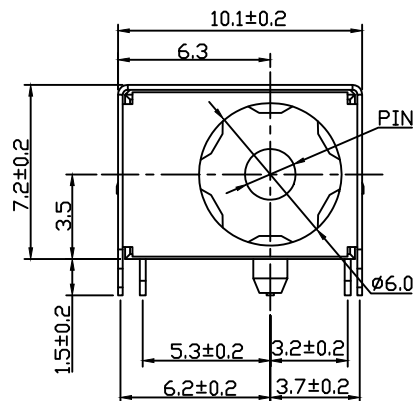

SPECIFICATION

Rated Load:DC 30V2A

Contact resistance:30mΩ, max




Insulation resistance:100MΩ, min

Withstand Voltage:AC500V


Actuating Force:3-20N

Life:5000 cycles

Operating Temperature:-30℃-70℃

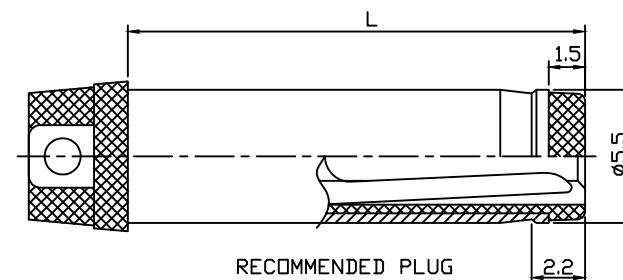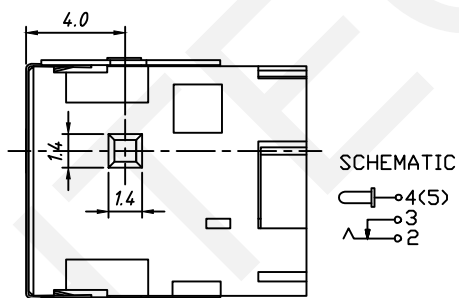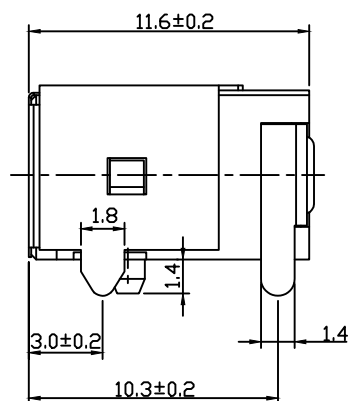

PIN	Ø2.0	Ø2.5
APPD		

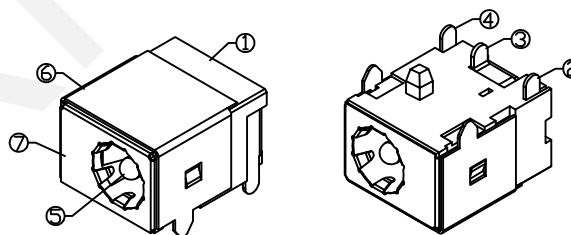

No.	Description	QTY	Material	Plating
1	Housing	1	PBT	---
2	Cover	1	PF	---
3	Spring	1	SUS301	Sn-Plating
4	Flag Piece	1	Brass	Sn-Plating
5	Contact Foot	1	Brass	Sn-Plating
6	PIN	1	Brass	Ni-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

30V 2A DC Jack DIP

THIRD ANGLE PROJECTION



RHTAYDC-018A