

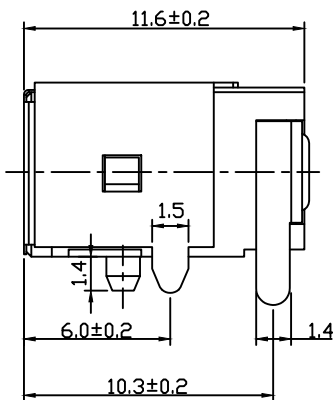
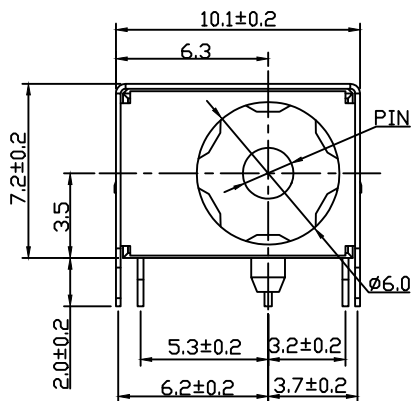






PCB Layout View

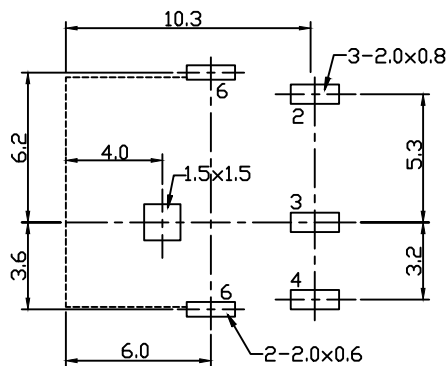

SPECIFICATION

Rated Load:DC 30V3A

Contact resistance:30mΩ, max


Insulation resistance:100MΩ, min

Withstand Voltage:AC500V

Actuating Force:3-20N


Life:5000 cycles

Operating Temperature:-30℃~70℃

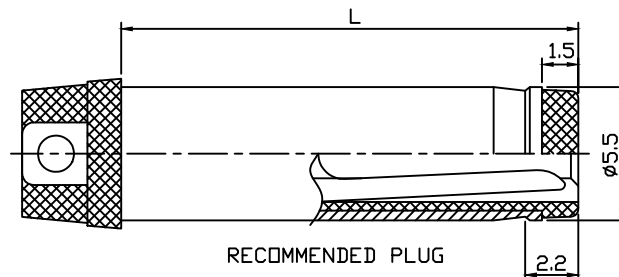

SCHEMATIC

PIN	Ø2.0	Ø2.5
APPD		



No	Description	QTY	Material	Plating
1	Housing	1	LCP	---
2	Spring Piece	1	Bronze	Ag-Plating
3	Curve Piece	1	Brass	Ag-Plating
4	Contact Foot	1	Brass	Ag-Plating
5	PIN	1	Brass	Ni-Plating
6	Contact Foot	1	Brass	Ag-Plating
7	Cover	1	SUS301	Ni-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

30V 3A DC Jack DIP

THIRD ANGLE PROJECTION



RHTAYDC-018B