
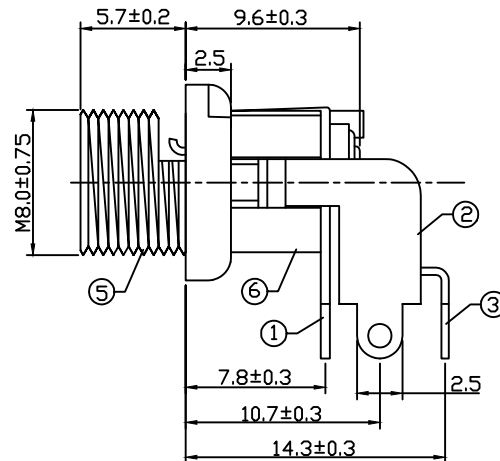


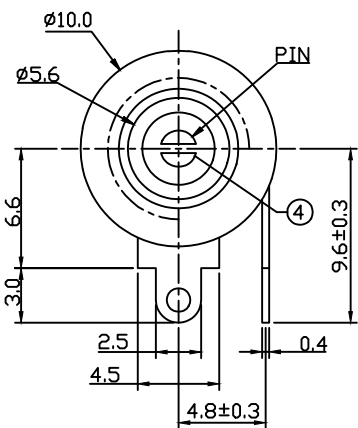

SPECIFICATION

Rated Load:DC 30V5A

Contact resistance:30mΩ, max


Insulation resistance:100MΩ, min

Withstand Voltage:AC500V



Actuating Force:3-20N

Life:5000 cycles

Operating Temperature:-30℃-70℃







PCB Layout Top View

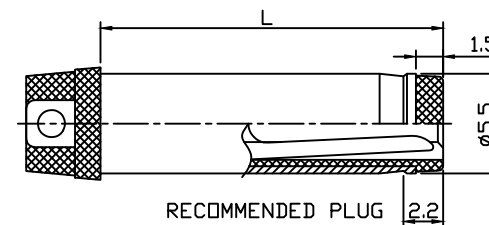

PIN	Ø2.0	Ø2.5
APPL		

SCHEMATIC

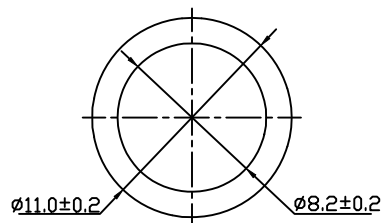

No.	Description	QTY	Material	Plating
1	Spring	1	Bronze	Sn-Plating
2	Curve Piece	1	Brass	Sn-Plating
3	Flag Piece	1	Brass	Sn-Plating
4	PIN	1	Brass	Ni-Plating
5	Axis Support	1	Brass	Ni-Plating
6	Housing	1	PBT	---
7	Nut	1	Brass	Ni-Plating
8	Split Washer	1	Iron	Ni-Plating

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

30V 5A DC Jack DIP

THIRD ANGLE PROJECTION



RHTAYDC-025A

RHTECP NINGBO RHT ELECTRONIC CO.,LTD