


PCB Layout Top View

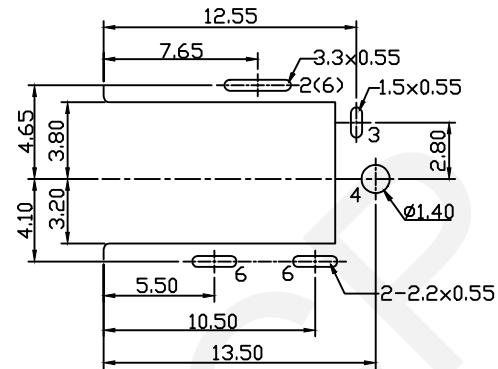

SPECIFICATION

Rated Load:DC 20V7A

Contact resistance:30mΩ, max



Insulation resistance:100MΩ, min

Withstand Voltage:AC500V






Actuating Force:3-20N

Life:5000 cycles

Operating Temperature:-30℃-70℃



SCHEMATIC

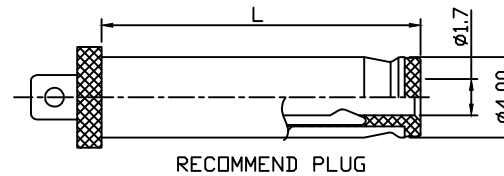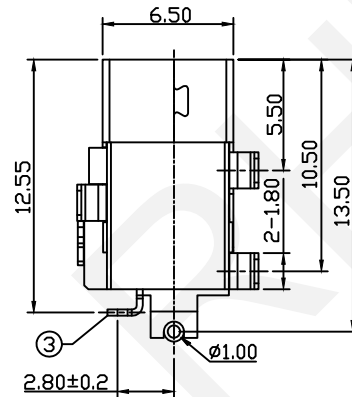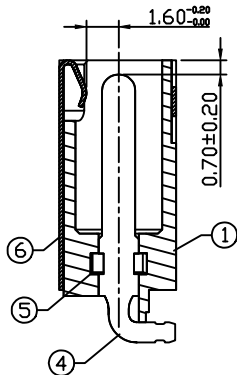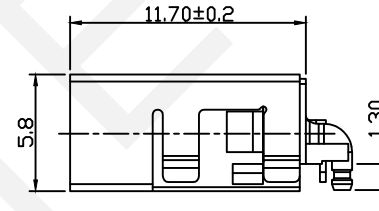

No.	Description	QTY	Material	Plating
1	Housing	1	PA9T/LCP	---
2	Spring Piece	1	Bronze	Au-Plating
3	Curve Piece	1	Brass	Au-Plating
4	PIN	1	Brass	Au-Plating
5	Stopper	1	PA9T/LCP	---
6	Shell	1	Bronze	Ni-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

20V 7A DC Jack Mid Mount 1.35mm

THIRD ANGLE PROJECTION

RHTAYDC-035