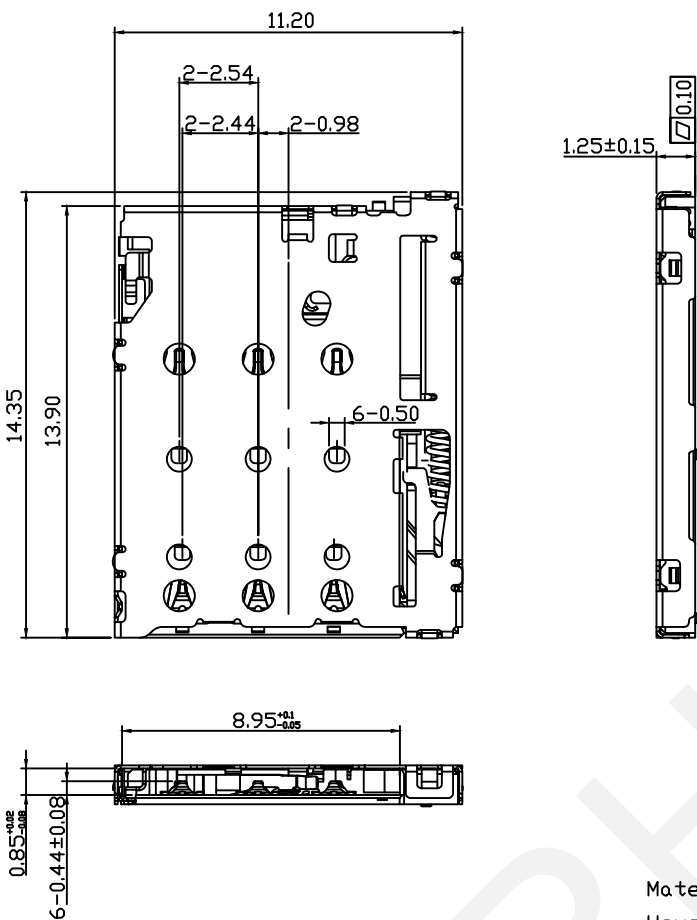


Material:

Housing: High Temperature Thermoplastic


Terminal: Copper Alloy

Shell: Stainless Steel

Plating:

terminal: 50u" Ni Underplated Overall / G/F Plated On Contact Area / G/F Plated On Solder Area

Shell: 30u" Ni Underplated Overall G/F Plated On Contact Area And Solder Area

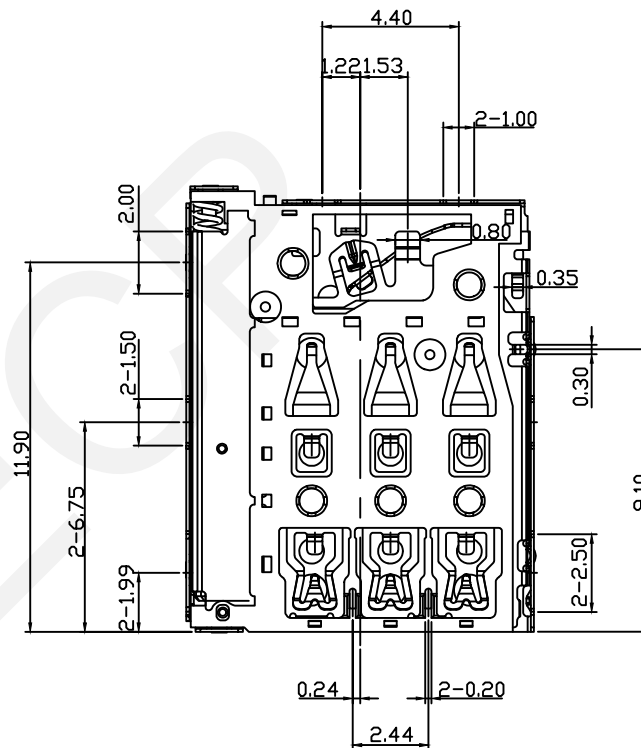

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5


DRWN BY PAN

CHK'D BY FENG





APPR BY ZHAN

Nano SIM Card Connector,PUSH PUSH,  
6Pin,H1.25mm,with CD Pin

THIRD ANGLE PROJECTION



RHTAYIM-103-H1.25-R

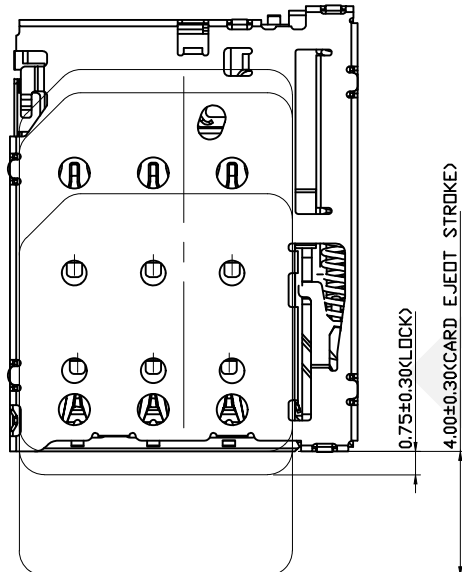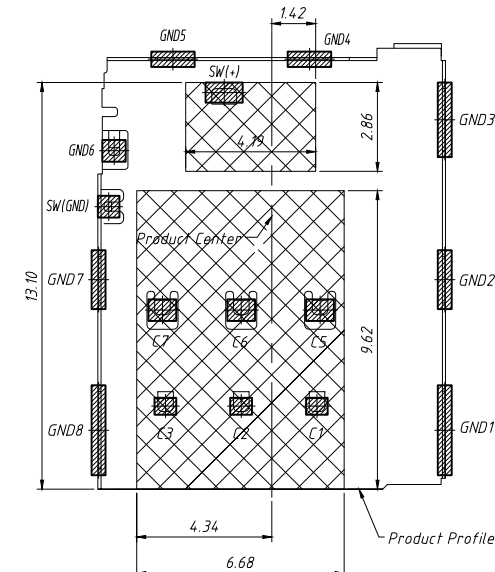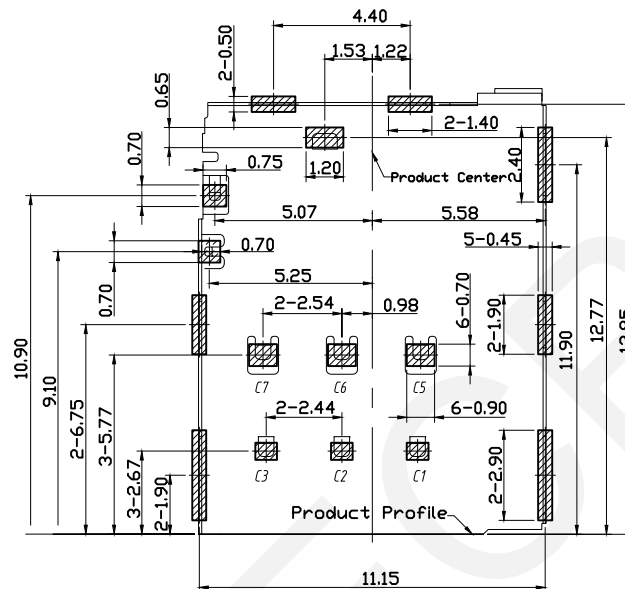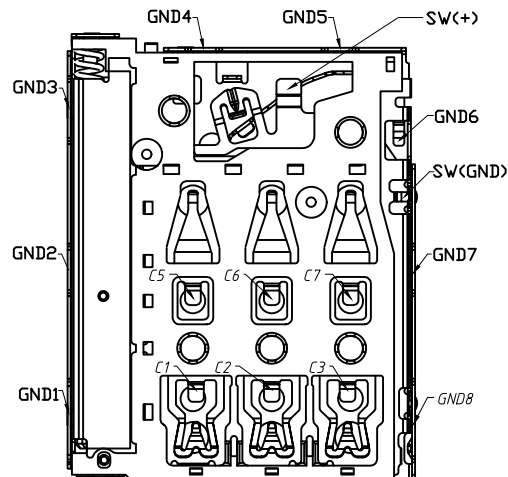

RECOMMENDED PCB LAYOUT(TOLERANCE:±0.05)  
RECOMMEND MATAL MASK T=0.12MM

- SMT SOLDER AREA
- COPPER RESTRICTED AREA
- 1.TOUCH AREA OF CONTACT
- TIPS NO ELECTRICAL FUNCTION
- 2.NO FIRST PCB LAYOUT
- CIRCUITS IN THE AREA


Technical Speciality:  
Rated Voltage:30V  
Current Rating:0.5A  
Insulation Resistance: 1000MΩ Min.  
Contact Resistance:100mΩ Max.  
Withstanding Voltage:500V DC For 1 Minutes.  
Operating Temperature:-40℃~+75℃ Humidity 80% R.H Max.

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

| UNITS:mm | SHEET SIZE: A4 |       | SCALE:--- |
|----------|----------------|-------|-----------|
| 0~3      | 3~18           | 18~50 | 50~120    |
| ±0.12    | ±0.15          | ±0.3  | ±0.5      |

DRWN BY PAN  
CHK'D BY FENG  
APPR BY ZHAN


Nano SIM Card Connector,PUSH PUSH,  
6Pin,H1.25mm,with CD Pin  
THIRD ANGLE PROJECTION  
 RHTAYIM-103-H1.25-R

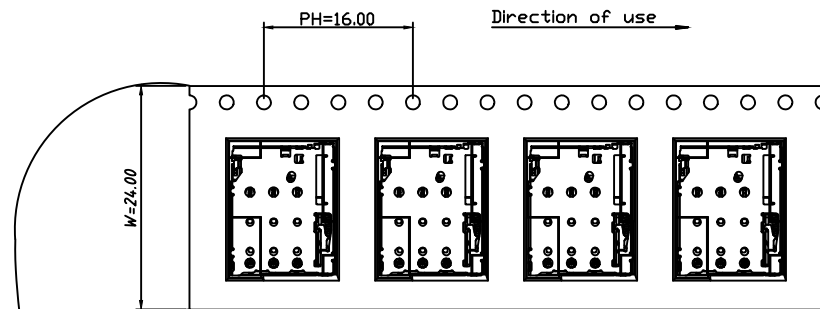



#### NOTES:

1.Packing quantity per plate:2000PCS/Plate

2.Loading and packing method

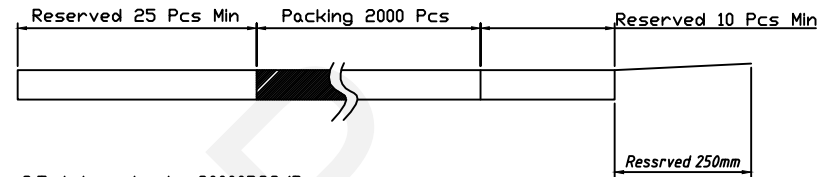

3.Total packaging:20000PCS/Box

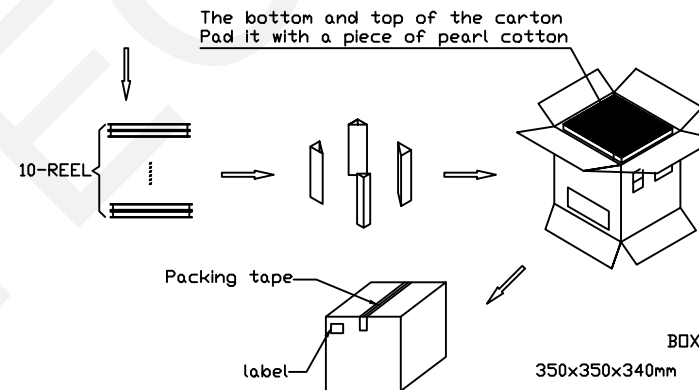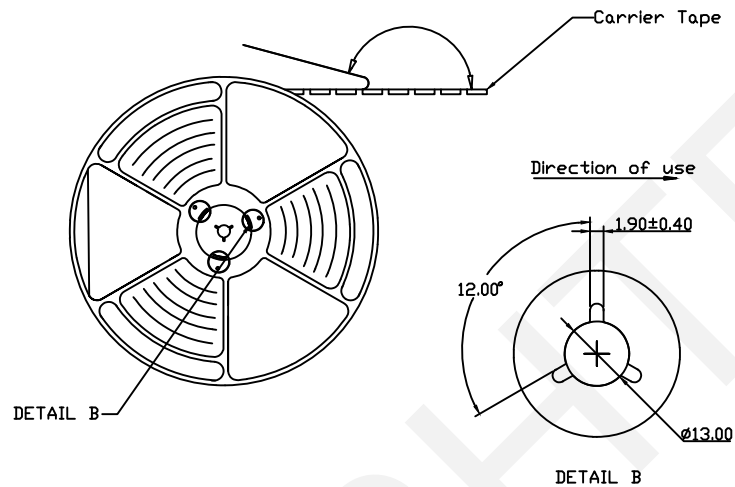

| Description                               | Quantity |
|-------------------------------------------|----------|
| Carrier band (Lucent,PS W=24 PH=16,T=0.3) | 325.6m   |
| Box (K=K,T=7.0,350×350×340)               | 1PCS     |
| PE Bag (T=0.08mm,730×760×730)             | 1PCS     |
| Self-adhesive (W=21.30)                   | 331.2m   |
| Beam (K=K,T=7.0,95×95×290)                | 4PCS     |
| Pearl Wool (340×340×18)                   | 2PCS     |
| REEL (BLUE,13Inches×24mm,Ø330)            | 10PCS    |
| 1.25H Push-Push Nano-SIM Card             | 20000PCS |

| UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN |
|----------|----------------|-----------|-------------|
| 0~3      | 3~18           | 18~50     | 50~120      |
| ±0.12    | ±0.15          | ±0.3      | ±0.5        |

|               |
|---------------|
| CHK'D BY FENG |
| APPR BY ZHAN  |

|                                                             |                     |
|-------------------------------------------------------------|---------------------|
| Nano SIM Card Connector,PUSH PUSH, 6Pin,H1.25mm,with CD Pin |                     |
| THIRD ANGLE PROJECTION                                      | RHTAYIM-103-H1.25-R |

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD