
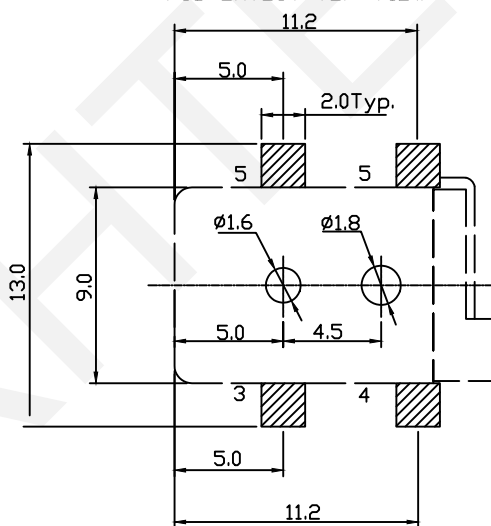


SPECIFICATION



Rated Load:DC 30V2A
 Contact resistance:30mΩ,max.
 Insulation resistance:100MΩ,min
 Withstand Voltage:AC500V
 Actuating Force:3-20N
 Life:5000 cycles
 Operating Temperature:-30℃-70℃

PCB LAYOUT TOP VIEW

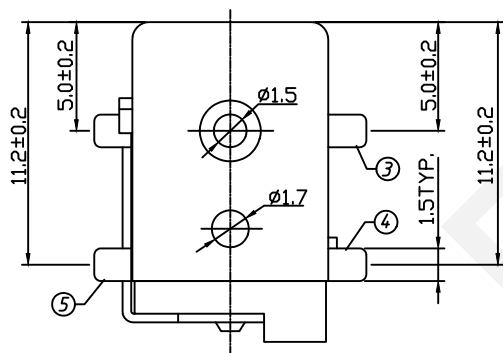

SCHEMATIC

PIN	∅2.0	∅2.5
APPD		

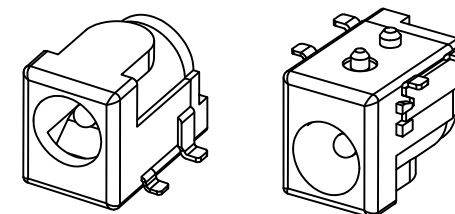

NO.	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Cover	1	PA9T	---
3	Spring Piece	1	Bronze	Ag-Plating
4	Curve Piece	1	Brass	Ag-Plating
5	Flat Foot	1	Brass	Ag-Plating
6	Pin	1	Brass	Ni-Plating

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN

30V 2A DC Jack DIP
 THIRD ANGLE PROJECTION
 RHTAY13DC-001