

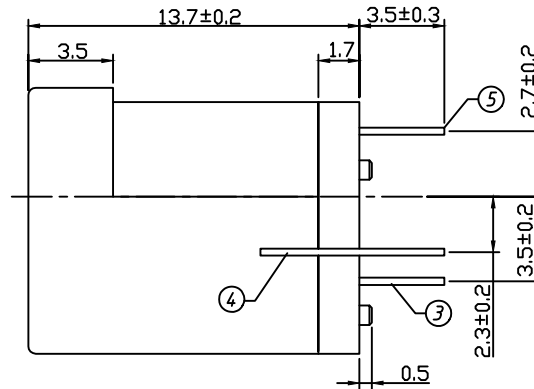
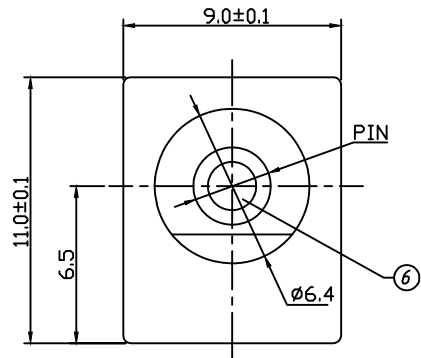
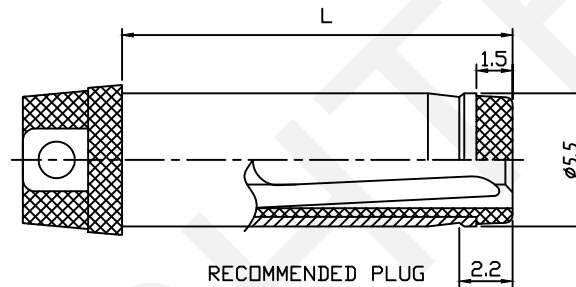
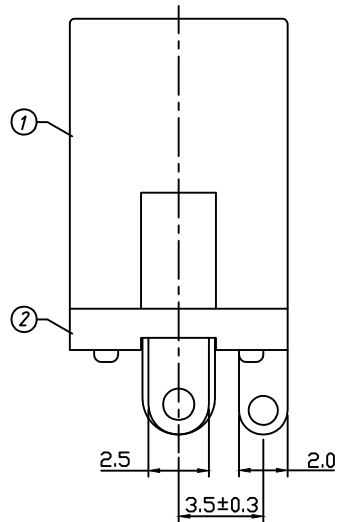


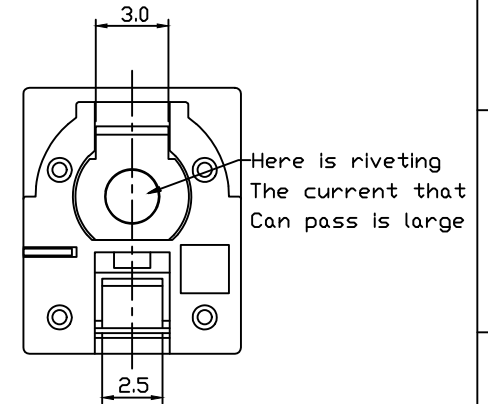


PCB Layout Top view

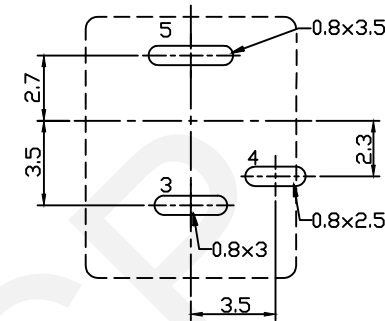

RECOMMENDED PLUG

PIN	Ø2.0	Ø2.5
APPD		

SCHEMATIC



SPECIFICATION

Rated Load:DC 30V 5A

Contact resistance:30mΩ, max

Insulation resistance:100MΩ, min

Withstand Voltage:AC500V

Actuating Force:3-20N

Life:5000 cycles

Operating Temperature:-30℃-70℃

N0.	Description	QTY	Material	Plating
1	Housing	1	PBT	---
2	Cover	1	PBT	---
3	Spring Piece	1	Bronze	Ag-Plating
4	Curve Piece	1	Brass	Ag-Plating
5	Flat Foot	1	Brass	Ag-Plating
6	Pin	1	Brass	Ni-Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG

APPR BY ZHAN

30V 5A DC Solder

THIRD ANGLE PROJECTION



RHTAY13DC-007