
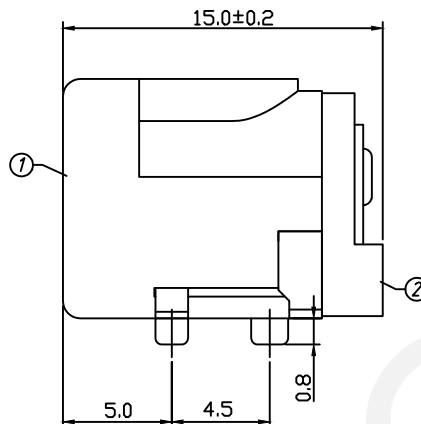


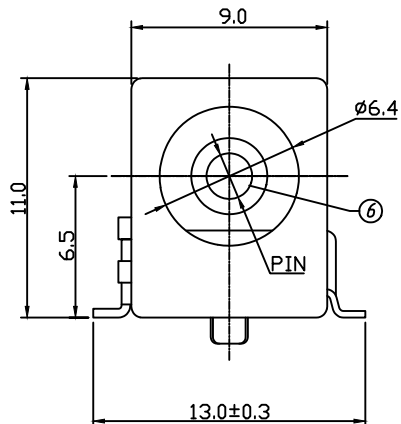

SPECIFICATION

Rated Load:DC 24V5A

Contact resistance:30mΩ, max




Insulation resistance:100MΩ, min

Withstand Voltage:AC500V

Actuating Force:3-20N

Life:5000 cycles

Operating Temperature:-30℃~70℃

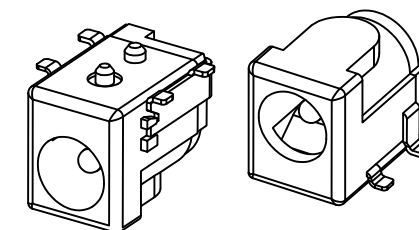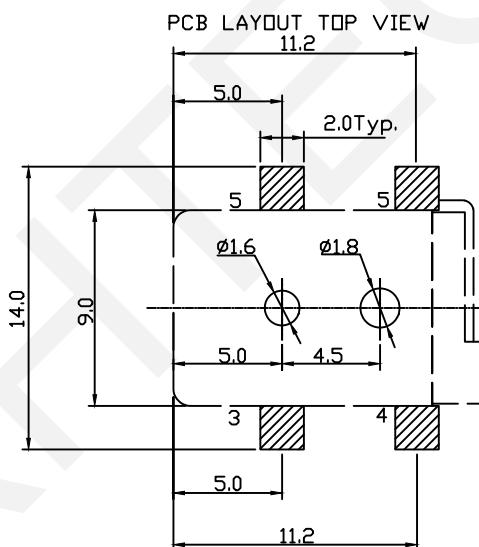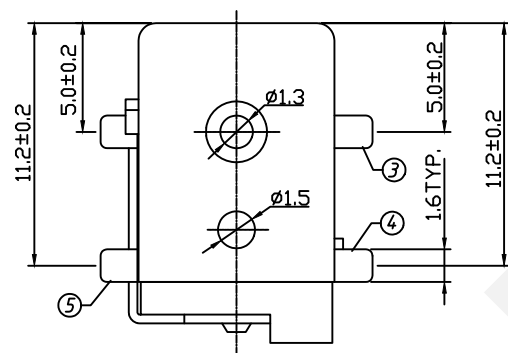

PIN	Ø2.0	Ø2.5
APPD		

SCHEMATIC

NO.	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Cover	1	PA9T	---
3	Spring Piece	1	Bronze	Ag-Plating
4	Curve Piece	1	Brass	Ag-Plating
5	Flat Foot	1	Brass	Ag-Plating
6	Pin	1	Brass	Ni-Plating

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
		±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

24V 5A DC Jack DIP

THIRD ANGLE PROJECTION



RHTAYDC-001A

RHTECP NINGBO RHT ELECTRONIC CO.,LTD